



GLOBAL JOURNAL OF RESEARCHES IN ENGINEERING
CIVIL AND STRUCTURAL ENGINEERING
Volume 13 Issue 1 Version 1.0 Year 2013
Type: Double Blind Peer Reviewed International Research Journal
Publisher: Global Journals Inc. (USA)
Online ISSN: 2249-4596 & Print ISSN: 0975-5861

Dynamic Analysis of Hirakud Dam Due to Seismic Forces

By Gaurva Verma, Dr. M.K.Verma & Dr. R.K.Tripathi

Deptt.of Civil Engg, NIT, Raipur, India

Abstract - The present study investigates and analyses the behavior of a concrete gravity dam during the strong ground horizontal motions due to an earthquake with CADAM. The model in thesis is the structure of Hirakud gravity dam. Hirakud dam across river Mahanadi in eastern India is a composite structure of earth, concrete and masonry. Length of the main dam is 4.80 Km, flanked by 21 km earthen dykes on left and right sides, making a total length of 25.8km. Two concrete spillways of average height 45.75 m and maximum height 60.96 m are located in the two arms of the river. Hirakud dam has been built at Latitude 210-32' N and Longitude 830-52'E across river Mahanadi at about 15 km upstream of Sambalpur town. This is the first post independence major multipurpose river valley project in India. It hasn't ever shakes under the influence of powerful ground motions in the area. Because of lowness and special firmness of the structure it behaves like a solid body, therefore the structure should be compared with many different earthquake accelerations and then the maximum vibration of the body is considerable. After linear dynamic analysis with CADAM the results show the stresses on the body of the dam are relative to particularity of each earthquake like magnitude, epicenter distance and PGA .The body of dam is modeled two dimensional in CADAM.

Keywords : *dynamic analysis, concrete dam, seismic forces simulating.*

GJRE Classification : *FOR Code : 090506*



Strictly as per the compliance and regulations of :



Dynamic Analysis of Hirakud Dam Due to Seismic Forces

Gaurva Verma^α, Dr. M.K.Verma^σ & Dr. R.K.Tripathi^ρ

Abstract - The present study investigates and analyses the behavior of a concrete gravity dam during the strong ground horizontal motions due to an earthquake with CADAM. The model in thesis is the structure of Hirakud gravity dam. Hirakud dam across river Mahanadi in eastern India is a composite structure of earth, concrete and masonry. Length of the main dam is 4.80 Km, flanked by 21 km earthen dykes on left and right sides, making a total length of 25.8km. Two concrete spillways of average height 45.75 m and maximum height 60.96 m are located in the two arms of the river. Hirakud dam has been built at Latitude 21°-32' N and Longitude 83°-52'E across river Mahanadi at about 15 km upstream of Sambalpur town. This is the first post independence major multipurpose river valley project in India. It hasn't ever shakes under the influence of powerful ground motions in the area. Because of lowness and special firmness of the structure it behaves like a solid body, therefore the structure should be compared with many different earthquake accelerations and then the maximum vibration of the body is considerable. After linear dynamic analysis with CADAM the results show the stresses on the body of the dam are relative to particularity of each earthquake like magnitude, epicenter distance and PGA. The body of dam is modeled two dimensional in CADAM. The procedure of analyses is linear response spectra analysis. The acceleration records of ground motions in the CADAM dynamic response spectra analysis are real records of occurred earthquakes. The other data which are used in CADAM modeling are approximately unreal and exaggerated and they are used for magnifying the influence of earthquake on the dam's body.

Keywords : *dynamic analysis, concrete dam, seismic forces simulating.*

I. INTRODUCTION

Historically Odisha has experienced very few moderate to large earthquakes. Some events with magnitudes in excess of 5.0 have originated in the Bay of Bengal off the coast of the state. Several faults have been identified in the region and some have shown evidence of movement during the Holocene epoch. The Brahmani Fault in the vicinity of Bonaigarh is among them. The Mahanadi also flows through a graben structure. Several deep-seated faults are situated beneath the Mahanadi Delta. However, it must be stated that proximity to faults does not necessarily translate

Author α: Research Scholar Deptt.of Civil Engg. NIT, Raipur, (C.G.) 492010, India. E-mail : gaurva.verma@gmail.com

Author σ: Professor Deptt.of Civil Engg NIT, Raipur, (C.G.) 492010, India. E-mail : mkseem670@gmail.com

Author ρ: Associated Professor Deptt.of Civil Engg NIT, Raipur, (C.G.) 492010, India. E-mail : rajesh_tripath64@yahoo.co.in

into a higher hazard as compared to areas located further away, as damage from earthquakes depends on numerous factors such as subsurface geology as well as adherence to the building codes.

Recognizing an earthquake behavior is of high importance. Previous earth quake experiences has shed light on the fact that in order to decrease the damages caused by earthquakes is only possible through in depth studies of previous earth quakes and also taking into consideration quake behavior of important structures. Concrete dams are of great importance because any damage can cause irreparable financial and causalities. Dynamic analysis of the concrete weight dams against external and internal forces has been the center of attention for Scientists and experts.

Present study is focused on dynamic analysis of concrete dam against difference forces caused by recent earthquakes. HassanMirza-Bozorg and MehdiVarmarziar in 2009 did a study in which they studied the effect of earthquake on the linear response of the concrete dam. The purpose of this study was to study the effect of non-uniform instigation tremulous on tremulous response of concrete dam and to compare it to uniform instigation which is common in analyzing and designing dams using the ABAQUES software. Chopra in 1991 studied the effect of earthquake on a weight dam conditional of the fact that there is a shaking floor under the dam. In this study the effect of earthquake on a rigid dam and a flexible dam was studied and several graphs were shown. Several problems that are a result of static analysis method are addressed. Various drawbacks include not considering: the structural elasticity, damping forces, variation of the foundation acceleration over time, and the alternation and short duration characteristics of the seismic loading. In Response Spectra analysis method the history of the structures behavior under the accelogram of the earthquake was studied and the forces, stresses and movements were calculated. In this study CADAM was used which is considered to be powerful software of this kind. For the purpose of response spectra records of real earthquakes such as earthquake on **12 June 2001** - Konokjora-Sundargarh area, Odisha, Mw 4.7, is used.

II. HISTORY

Dynamic analysis of concrete dam is more complicated compared to other buildings under the same conditions. ICOLD recommendations are followed

while evaluating the seismic parameters (ICOLD, 1989), therefore an Operating Basis Earthquake (OBE) and a Maximum Credible Earthquake (MCE) are considered. The seismic input is defined in terms of maximum horizontal accelerations and unified response spectra. Artificial acceleration time histories which are compatible with the response spectra are also provided and can be employed especially for non-linear analyses. McGuire’s relationship between magnitude, distance and ground acceleration is used when evaluating the maximum horizontal acceleration which is based on the earthquake-catalogue (Lenhardt, 1995). For the OBE, a return period of 200 years is selected with a minimum value of 0.6 m/s². For the MCE, not only the results of extreme-value statistics are considered, but also the global geology and long-term tectonic processes are taken into account. The resulting ground accelerations could be considered as approximate values only and, in general, more detailed studies including the local geological situation are necessary for a specific site. The maximum acceleration of the vertical excitation is defined as 2/3 of the respective maximum horizontal acceleration.

A pseudo-dynamic seismic analysis is based on the response spectra method. It is conceptually similar to a pseudo-static analysis except that it recognizes the dynamic amplification of the inertia forces along the height of the dam. However, the oscillatory nature of the amplified inertia forces is not considered. That is the stress and stability analyses are performed with the inertia forces continuously applied in the same direction. Since the pseudo-dynamic method does not recognize the oscillatory nature of earthquake loads it is also appropriate to perform the safety evaluation in two phases: (a) the stress analysis using peak spectral acceleration values, and (b) the stability analysis using sustained spectral acceleration values. It is assumed in these analyses that the dynamic amplification applies only to the horizontal rock acceleration. The period of vibration of the dam in the vertical direction is considered sufficiently small to neglect the amplification of vertical ground motions along the height of the dam.

a) *The equations governing the lineal dynamic analysis of structures*

For three-dimensional seismic motion, the typical modal Equation is written as:

$$\ddot{y}(t)_n + 2\zeta_n \omega_n \dot{y}(t)_n + \omega_n^2 y(t)_n = p_{nx} \ddot{u}(t)_{gx} + p_{ny} \ddot{u}(t)_{gy} + p_{nz} \ddot{u}(t)_{gz}$$

Where the three *Mode Participation Factors* are defined by

$$p_{ni} = -\phi_n^T M_i$$

In which i is equal to x, y or z. Two major problems must be solved to obtain an approximate

response spectrum solution to this equation. First, for each direction of ground motion, maximum peak forces and displacements must be estimated. Second, after the response for the three orthogonal directions has been solved, it is necessary to estimate the maximum response from the three components of earthquake motion acting at the same time. This section addresses the modal combination problem from one component of motion only.

For input in one direction only, Equation (15.1) is written as:

$$\ddot{y}(t)_n + 2\zeta_n \omega_n \dot{y}(t)_n + \omega_n^2 y(t)_n = p_{ni} \ddot{u}(t)_g$$

Given a specified ground motion $\ddot{u}(t)_g$, damping value and assuming $P_{ni} = -1.0$, it is possible to solve the Equation at various values of ω and plot a curve of the maximum peak response $(\omega)MAX$. For this acceleration input, the curve is by definition the *displacement response spectrum* for the earthquake motion. A different curve will exist for each different value of damping.

A plot of $\omega y(\omega)MAX$ is defined as the *pseudo-velocity spectrum* and a plot of $\omega^2 y(\omega)MAX$ is defined as the *pseudo-acceleration spectrum*.

The three curves-displacement response spectrum, pseudo-velocity spectrum, and pseudo-acceleration spectrum are normally plotted as one curve on special log paper. However, the pseudo-values have minimum physical significance and are not an essential part of a response spectrum analysis. The true values for maximum velocity and acceleration are calculated from the solution of Equation (15.2). There is a mathematical relationship, however, between the pseudo-acceleration spectrum and the total acceleration spectrum. The total acceleration of the unit mass, single degree-of-freedom system, governed by Equation (15.2), is given by:

$$\ddot{u}(t) = \ddot{y}(t) + \ddot{u}(t)_g$$

Equation (15.2) can be solved for $\ddot{y}(t)$ and substituted into Equation (15.3) to yield:

$$\ddot{u}(t)T = -\omega^2(t) - 2 \xi \omega \dot{y}(t)$$

Therefore, for the special case of zero damping, the total acceleration of the system is equal to $\omega^2 y(t)$. For this reason, the *displacement response spectrum* curve is normally not plotted as modal displacement $y(\omega)MAX$ versus ω . It is standard to present the curve in terms of $S(\omega)$ versus a period T in seconds,

Where:

$$S(\omega) a = -(\omega)^2 y(\omega)MAX$$

and

$$\frac{2\pi}{\omega}$$

The pseudo-acceleration spectrum curve, $S(\omega)a$, has the units of acceleration versus period that has some physical significance for zero damping only. It is apparent that all response spectrum curves represent the properties of the earthquake at a specific site and are not a function of the properties of the structural system. After an estimation is made of the linear viscous damping properties of the structure, a specific response spectrum curve is selected.

III. MODELING THE DAMS SYSTEM AND FOUNDATION

The Hirakud Dam is a composite structure of earth, concrete and masonry. Ten km north of Sambalpur, it is the longest major earthen dam in the world, measuring 24 km including dykes, and stands across the river Mahanadi. The main dam has an overall length of 4.8 km spanning between two hills; the Lamdungri on the left and the Chandili Dunguri on the right. The dam is flanked by 21 km earthen dykes on both the left and right sides, closing the low saddles beyond the adjoining hills. The dam and dykes together measure 25.8 km. It also forms the biggest artificial lake in Asia, with a reservoir holding 743 km² at full capacity, with a shoreline of over 640 km.

The building of the dam in spite of its great height and its hardness shows a strong behavior under horizontal movements, because of this in the below study the modeling was done under the acceleration of several earthquakes so that we can study the maximum vibration.

The study area lies between 17° to 24°N, 78° to 88°E and a simplified geology map (Sarkar, 2001) with main tectonic elements (GSI, 2000) is shown in Fig. 1. The Bastar craton [BB] is separated from the Dharwar [DB] and Singhbhum cratons [SB] by the Godavari [GG] and Mahanadi [MG] Gondwana grabens respectively; with the Eastern Ghat Mobile belts [EGMB] lying to the south east. From detailed geological, petrological and structural studies the Central Indian shear (CIS, Yedekar *et al.*, 1990) has been identified, which separates the Bastar block from the northern (Bundelkhand) block. The western side of this shear is buried under alluvium and traps while to the east it forks into two parts with the northern part coming close to the Tan shear. From geological and geochronological data the other arm is conjectured to extend eastwards below the Gondwana sediments and merge with the Singhbhum shear [8] (Yedekar *et al.*, 1990). The Tan shear [3] is believed to extend below the cover (Yedekar *et al.*, 1990) and possibly joins the Barabhum shear [7] within the Singhbhum block [SB]. Due to the extensive surface cover of the Mahanadi Graben [MG] by the Gondwana sediments, the subsurface extension of these structures needs to be verified. The north-western part of the study region and the northern part of the Godavari Graben are

covered by Deccan flood basalts. The Bastar craton consists of two Proterozoic basins (Chattisgarh [C] and Indravati [I]). The Central Indian Tectonic zone (CITZ) (Yedekar *et al.*, 1990) lying to the north of the CIS is marked by several sub-parallel ENE trending faults: Narmada North and South [11 and 12], Tapti fault [1], Gavilgarh fault [2], Tan shear [3], Bamni-Chilpa fault [5] and Tatapani fault [6]. The Tatapani area has several thermal springs that are responsible for the high heat flow in Central India (Ravi Shankar, 1991). The Singhbhum Block [SB] to the east is separated from the rest of the Indian Peninsular Shield by the Mahanadi Graben [MG] occurring to its west and the Sukinda thrust (Mahadevan, 2001) to the south. Tectonically, this block includes the Singhbhum granite (which includes banded iron formation) to the south, and the Proterozoic Singhbhum mobile belt in the middle separated from the Chotanagpur Granite Gneiss terrain in the north by the Barabhum shear [7]. The Eastern Ghat Mobile Belt (EGMB) is a high-grade NE-SW metamorphic belt to the south of the Singhbhum block. The EGMB is separated from the adjoining blocks by a major shear/thrust called Sileru shear zone

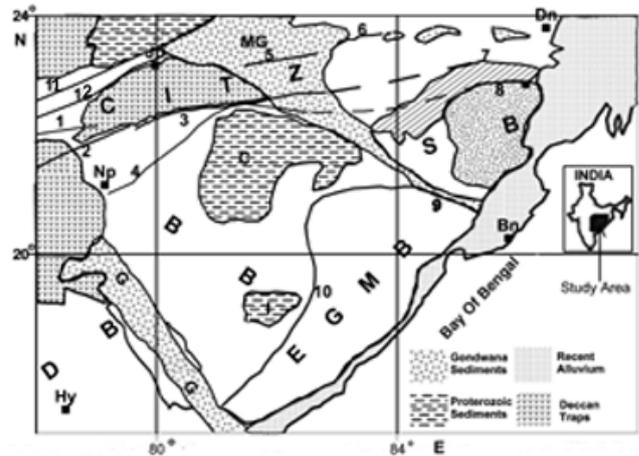


Figure 1 : Simplified geology and tectonic map of the study area redrawn from Sarkar (2001) and GSI (2000). DB-Dharwar block, BB-Bastar block, SB-Singhbhum block, CITZ-Central Indian Tectonic zone, EGMB-Eastern Ghat Mobile Belt, GG-Godavari graben, MG-Mahanadi graben, I-Indravati basin, C-Chattisgarh basin, 1-Tapti fault, 2-Gavilgarh fault, 3-Tan shear, 4-Central Indian shear, 5-Bamni-Chilpa fault, 6-Tatapani fault, 7- Barabhum shear, 8-Singhbhum shear, 9-Sukinda thrust, 10-Sileru shear, 11-North Narmada fault, 12-South Narmada fault. Hy-Hyderabad, Bn-Bhubaneswar, Dn-Dhanbad, Jb-Jabalpur, Np-Nagpur.

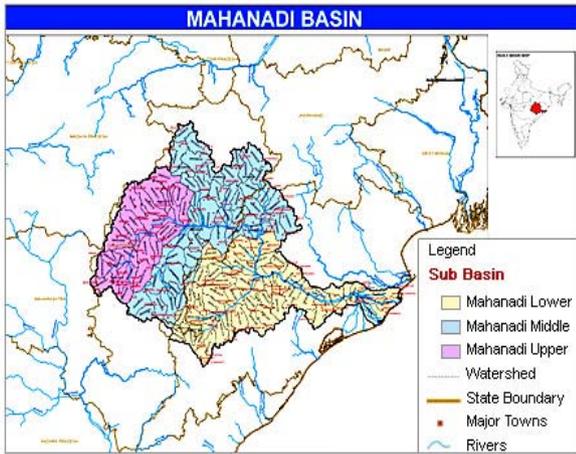


Figure 2 : Figure showing the Mahanadi Basin

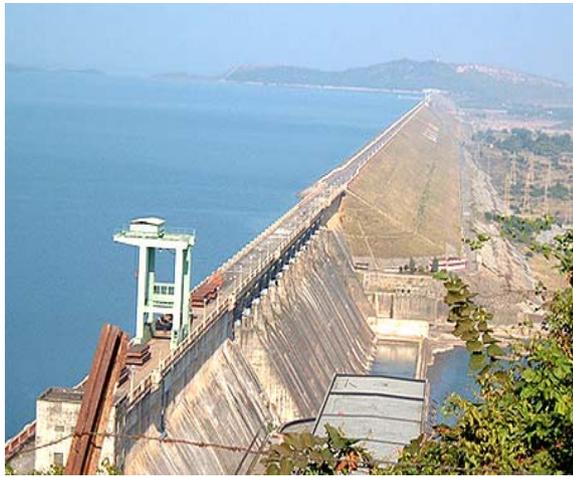


Figure 3 : A view of the dam

Since the pseudo-dynamic method does not recognize the oscillatory nature of earthquake loads it is also appropriate to perform the safety evaluation in two phases: (a) the stress analysis using peak spectral acceleration values, and (b) the stability analysis using sustained spectral acceleration values. It is assumed in these analyses that the dynamic amplification applies only to the horizontal rock acceleration. The period of vibration of the dam in the vertical direction is considered sufficiently small to neglect the amplification of vertical ground motions along the height of the dam.

To ensure the accuracy of the pseudo-dynamic method, the structure is divided in thin layers to perform numerical integrations. Number of divisions up to 301 can be specified. The weight of the concrete is 2630Kg/m³. The Poisson's coefficient was 0.2. The dynamic flexibility of the structure is modeled with the dynamic concrete Young's modulus (Es) 27400MPa. The dam damping on rigid foundation without reservoir interaction is considered to be 0.05. Any change to these basic parameters affects the fundamental period of vibration and the damping of the dam-foundation-reservoir system. Thus the spectral accelerations are

evaluated. The wave reflection coefficient (α) is the ratio of the amplitude of the reflected hydrodynamic pressure wave to the amplitude of a vertical propagating pressure wave incident on the reservoir bottom. A value of $\alpha = 1$ indicates that pressure waves are completely reflected, and smaller values of α indicate increasingly absorptive materials. The value of α is considered to be 0.5. The velocity of pressure waves in water is in fact the speed of sound in water. Generally it is assumed at 1440 m/sec (4720 ft/sec).

Because the maximum response in the natural vibration mode and in higher modes doesn't occur at the same time, a modal combination has to be considered. Four options are offered to the user: (i) Only the first mode; (ii) Only the static correction computed for higher modes; (iii) SRSS (square-root-of-the-sum-of-squares of the first mode and static correction for higher modes); or the (iv) Sum of absolute values which provides always conservative results.

The SRSS combination is considered for the study.

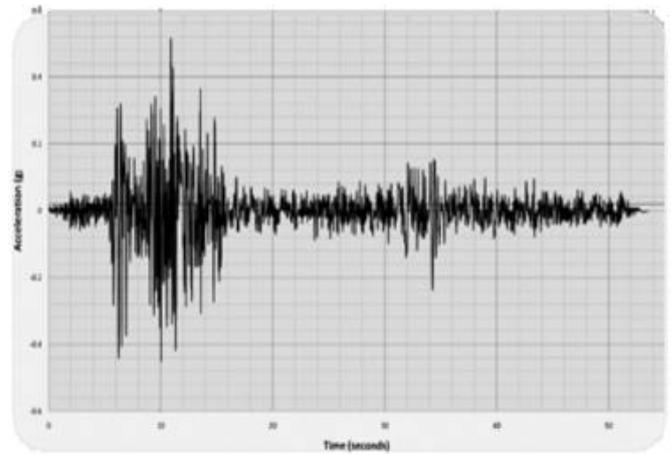


Figure 4 : Accelograph for 12 June 2001 - Konokjora-Sundargarh area, Odisha, Mw 4.7 earthquake

IV. ANALYSIS AND RESULTS

Dynamic Analysis of the dam section has been performed using CADAM with the parameters of the dam as input. The dam section has been checked for various load combinations. The result of stress and stability analysis for usual combination had been presented through Table 1 and Table 2 respectively whereas Table 3 and Table 4 depicts the results of stress and stability analysis for flood combination. It is evident from the results that the stress are within the permissible limits on all the joints and the Factor of safety for Overturning and Sliding is quite higher than the desired/safe values as per the code. The results of stress and stability analysis for peak acceleration values and sustained acceleration values for Seismic 1(OBE) has been presented through Table 5-8 It is observed that the dam section is safe for all seismic combinations

and the dam is safe against stresses, sliding and overturning at all the joints considered.

The overall results can be summarized as follows. The dam section is found to be safe for the present PGA values of 0.16g and no further retrofitting measures are required for the section presently. The FOS for sliding and overturning are observed as 8.974

and 6.258 for usual combination where as required is 1.00. For flood combination the FOS is observed as 5.385 and 5.939 whereas required is greater than 1. For seismic 1 combination FOS is 19.707 and 4.336 when required is 1.1. The Static, Pseudo-Static and Pseudo Dynamic Loads with the position of application are summarized from Table 9 to Table 16.

Table 1 : Usual combination (stress analysis)

| Joint | | Stresses | | | | | | |
|-------|------------------------|-----------------|-----------|--------------------|-------------|-----------|---------------------|-----------|
| ID | Upstream Elevation (m) | Normal stresses | | Allowable stresses | | u/s (kPa) | Shear maximum (kPa) | D/s (kPa) |
| | | U/s (kPa) | D/s (kPa) | Tension | compression | | | |
| 1 | 60.000 | -23.544 | -23.544 | 0.000 | -9990.000 | | | |
| 2 | 50.000 | -299.908 | -170.263 | 0.000 | -9990.000 | | | |
| 3 | 40.000 | -565.245 | -15.875 | 0.000 | -9990.000 | 0.000 | 12.588 | 12.588 |
| 4 | 30.000 | -653.789 | -35.684 | 0.000 | -9990.000 | 0.000 | 58.710 | 28.297 |
| 5 | 20.000 | -696.683 | -114.696 | 0.000 | -9990.000 | 0.000 | 121.565 | 90.951 |
| 6 | 10.000 | -717.814 | -221.321 | 0.000 | -9990.000 | 0.000 | 195.466 | 175.402 |
| 7 | Base | -872.986 | -342.992 | 0.000 | -9990.000 | 0.000 | 280.541 | 271.984 |

Table 2 : Usual combination (stability Analysis)

| Joint | | Safety Factors | | | | | Resultants | | | | Uplift |
|----------|--------------------|-----------------------|--------|----------------------------|--------|-----------|------------|----------|-----------|---------------------|----------------|
| ID | Upstream Elevation | Sliding Peak residual | | Overturning Toward u/s d/s | | Uplifting | Normal kN | Shear KN | Moment KN | Position % of joint | Final Force kN |
| | | | | | | | | | | | |
| 1 | 60.000 | >100 | >100 | >100 | >100 | >100 | -215.2 | 0.0 | 0.0 | 50.000 | |
| 2 | 50.000 | >100 | >100 | >100 | >100 | >100 | -2381.7 | 0.0 | -1108.9 | 45.404 | |
| 3 | 40.000 | >100 | 40.973 | 12.909 | 11.994 | 12.592 | -5247.8 | 128.1 | -4933.7 | 34.244 | 50.000 |
| 4 | 30.000 | 33.034 | 8.001 | 5.892 | 4.876 | 5.651 | -8960.0 | 1119.9 | -34795.1 | 35.059 | 45.404 |
| 5 | 20.000 | 16.566 | 4.450 | 4.760 | 3.403 | 4.294 | -13761.2 | 3092.7 | -55802.8 | 38.045 | 34.244 |
| 6 | 10.000 | 11.085 | 3.250 | 4.369 | 2.779 | 3.727 | -19651.5 | 6046.5 | -72464.9 | 41.189 | 35.059 |
| 7 | Base | 8.974 | 3.032 | 6.258 | 3.184 | 5.101 | -30265.7 | 9981.2 | -109446.0 | 42.736 | 38.045 |
| Required | | >1.00 | >1.000 | >1.000 | >1.000 | >1.000 | | | | | |

Table 3 : Flood combination (stress analysis)

| joint | | Stresses | | | | | | |
|-------|------------------------|-----------------|-----------|--------------------|-------------|-----------|---------------------|-----------|
| ID | Upstream Elevation (m) | Normal stresses | | Allowable stresses | | u/s (kPa) | Shear maximum (kPa) | D/s (kPa) |
| | | U/s (kPa) | D/s (kPa) | Tension | compression | | | |
| 1 | 60.000 | -23.544 | -23.544 | 0.000 | -15000.00 | | | |
| 2 | 50.000 | -191.114 | -207.443 | 0.000 | -15000.00 | 0.000 | -22.397 | 164.497 |
| 3 | 40.000 | -293.961 | -167.575 | 0.000 | -15000.00 | 0.000 | 132.883 | 132.883 |
| 4 | 30.000 | -288.830 | -281.060 | 0.000 | -15000.00 | 0.000 | 222.874 | 222.874 |
| 5 | 20.000 | -269.627 | -422.169 | 0.000 | -15000.00 | 0.000 | 334.770 | 334.770 |
| 6 | 10.000 | -247.919 | -571.632 | 0.000 | -15000.00 | 0.000 | 453.290 | 453.290 |
| 7 | Base | -411.487 | -724.370 | 0.000 | -15000.00 | 0.000 | 574.407 | 574.407 |

Table 4 : Flood combination (stability Analysis)

| Joint | | Safety Factors | | | | | Resultants | | | | Uplift |
|-------|--------------------|-----------------------|-------|----------------------------|-------|-----------|------------|----------|-----------|---------------------|----------------|
| ID | Upstream Elevation | Sliding Peak residual | | Overturning toward u/s d/s | | Uplifting | Normal kN | Shear KN | Moment KN | Position % of joint | Final Force kN |
| | | | | | | | | | | | |
| 1 | 60.000 | >100 | >100 | >100 | >100 | >100 | -215.2 | 0.0 | 0.0 | 50.000 | |
| 2 | 50.000 | 47.116 | 7.724 | 9.462 | 4.269 | 6.565 | -2018.9 | 261.4 | 139.7 | 50.683 | 362.8 |
| 3 | 40.000 | 15.509 | 2.839 | 4.707 | 2.526 | 3.720 | -4167.9 | 1468.0 | -3435.6 | 45.436 | 1532.6 |

| | | | | | | | | | | | |
|----------|--------|---------|--------|--------|--------|--------|----------|---------|---------|--------|--------|
| 4 | 30.000 | 9.512 | 2.026 | 4.177 | 2.033 | 3.128 | -7405.9 | 3655.6 | -437.4 | 49.773 | 3480.3 |
| 5 | 20.000 | 7.083 | 1.719 | 4.044 | 1.819 | 2.891 | -11733.0 | 6824.3 | 14626.2 | 53.675 | 6206.0 |
| 6 | 10.000 | 5.782 | 1.563 | 3.998 | 1.702 | 2.766 | -17149.2 | 10973.9 | 47247.1 | 56.583 | 9709.5 |
| 7 | Base | 5.385 | 1.755 | 5.939 | 2.033 | 4.016 | -28271.5 | 16104.5 | 64611.4 | 54.591 | 9374.0 |
| Required | | >1.0000 | >1.000 | >1.000 | >1.000 | >1.000 | | | | | |

Table 5 : Seismic #1 combination-Peak accelerations (Stress Analysis)

| joint | | Stresses | | | | | | |
|-------|------------------------|-----------------|-----------|--------------------|-------------|-----------|-----------|---------------|
| ID | Upstream Elevation (m) | Normal stresses | | Allowable stresses | | Shear | | |
| | | U/s (kPa) | D/s (kPa) | Tension | compression | u/s (kPa) | D/s (kPa) | maximum (kPa) |
| 1 | 60.000 | -28.061 | -24.050 | 0.000 | -27270.000 | 0.000 | -9.068 | 0.000 |
| 2 | 50.000 | -485.349 | -34.973 | 0.000 | -27270.000 | 0.000 | -68.147 | 27.733 |
| 3 | 40.000 | -797.246 | 0.000 | 0.000 | -27270.000 | 0.000 | -45.624 | 0.000 |
| 4 | 30.000 | -841.444 | 0.000 | 0.000 | -27270.000 | 0.000 | 26.446 | 0.000 |
| 5 | 20.000 | -878.089 | -46.114 | 0.000 | -27270.000 | 0.000 | 63.312 | 36.567 |
| 6 | 10.000 | -960.965 | -115.083 | 0.000 | -27270.000 | 0.000 | 98.155 | 91.258 |
| 7 | BASE | -1204.610 | -172.699 | 0.000 | -27270.000 | 0.000 | 138.375 | 136.946 |

Table 6 : Seismic #1 combination-Peak accelerations (Stability Analysis)

| Joint | | Safety Factors | | | | | Resultants | | | | Uplift |
|----------|--------------------|----------------|----------|-------------|--------|-----------|------------|----------|-----------|---------------------|----------------|
| ID | Upstream Elevation | Sliding | | Overturning | | Uplifting | Normal kN | Shear KN | Moment KN | Position % of joint | Final Force kN |
| | | Peak | residual | u/s | d/s | | | | | | |
| 1 | 60.000 | > 100 | 4.310 | 38.973 | > 100 | > 100 | -238.1 | -55.3 | -27.9 | 48.717 | |
| 2 | 50.000 | 32.229 | 6.437 | 4.619 | > 100 | > 100 | -2635.7 | -409.5 | -3852.3 | 35.574 | 48.6 |
| 3 | 40.000 | 63.373 | 13.106 | 3.801 | 14.598 | 13.936 | -5855.8 | -446.8 | -14337.2 | 27.112 | 452.7 |
| 4 | 30.000 | 95.377 | 23.863 | 3.999 | 5.662 | 6.254 | -10121.2 | 424.1 | -40580.1 | 30.853 | 1926.3 |
| 5 | 20.000 | 33.843 | 9.830 | 4.103 | 3.872 | 4.752 | -15674.7 | 1594.6 | -79772.5 | 34.997 | 4177.8 |
| 6 | 10.000 | 23.665 | 7.492 | 3.656 | 3.187 | 4.124 | -22516.4 | 3005.3 | -123459.6 | 36.898 | 7207.2 |
| | Base | 19.707 | 7.089 | 4.336 | 3.700 | 5.645 | -34281.2 | 4835.9 | -213093.8 | 37.513 | 7379.7 |
| Required | | >1.000 | >1.000 | >1.00 | >1.00 | >1.00 | | | | | |

Table 7 : Seismic #1 combination-Sustained accelerations (Stress Analysis)

| joint | | Stresses | | | | | | |
|-------|------------------------|-----------------|-----------|--------------------|-------------|-----------|---------------|-----------|
| ID | Upstream Elevation (m) | Normal stresses | | Allowable stresses | | Shear | | |
| | | U/s (kPa) | D/s (kPa) | Tension | compression | u/s (kPa) | maximum (kPa) | D/s (kPa) |
| 1 | 60.000 | -25.491 | -23.167 | 0.000 | -27270.000 | 0.000 | -5.267 | 0.000 |
| 2 | 50.000 | -405.094 | -80.749 | 0.000 | -27270.000 | 0.000 | -58.450 | 64.032 |
| 3 | 40.000 | -694.229 | 0.000 | 0.000 | -27270.000 | 0.000 | -32.352 | 0.000 |
| 4 | 30.000 | -781.563 | 0.000 | 0.000 | -27270.000 | 0.000 | 27.458 | 0.000 |
| 5 | 20.000 | -824.091 | -22.546 | 0.000 | -27270.000 | 0.000 | 90.646 | 17.878 |
| 6 | 10.000 | -854.207 | -127.713 | 0.000 | -27270.000 | 0.000 | 150.389 | 101.273 |
| 7 | Base | -1026.093 | -240.301 | 0.000 | -27270.000 | 0.000 | 218.551 | 190.553 |

Table 8 : Seismic #1 combination-Sustained accelerations (Stability Analysis)

| Joint | | Safety Factors | | | | | Resultants | | | | Uplift |
|-------|--------------------|----------------|----------|-------------|--------|-----------|------------|----------|-----------|---------------------|----------------|
| ID | Upstream Elevation | Sliding | | Overturning | | Uplifting | Normal kN | Shear KN | Moment KN | Position % of joint | Final Force kN |
| | | Peak | residual | u/s | d/s | | | | | | |
| 1 | 60.000 | > 100 | 6.929 | 62.817 | > 100 | > 100 | -222.4 | -32.1 | -16.2 | 49.204 | |
| 2 | 50.000 | 48.511 | 9.221 | 6.952 | > 100 | > 100 | -2461.1 | -266.9 | -2774.3 | 38.873 | |
| 3 | 40.000 | 79.350 | 16.094 | 4.571 | 13.316 | 13.012 | -5437.8 | -337.9 | -14197.9 | 28.913 | 452.7 |
| 4 | 30.000 | 90.446 | 21.348 | 3.717 | 5.310 | 5.840 | -9322.8 | 436.7 | -37068.9 | 30.597 | 1926.3 |

| | | | | | | | | | | | |
|----------|--------|--------|--------|-------|-------|-------|----------|--------|-----------|--------|--------|
| 5 | 20.000 | 24.279 | 6.693 | 3.573 | 3.662 | 4.437 | -14359.2 | 2145.4 | -76854.7 | 34.221 | 4177.8 |
| 6 | 10.000 | 14.504 | 4.363 | 3.537 | 2.972 | 3.851 | -20546.8 | 4709.6 | -106034.4 | 37.669 | 7207.2 |
| 7 | Base | 11.298 | 3.898 | 4.781 | 3.397 | 5.271 | -31520.5 | 8086.4 | -162269.2 | 39.658 | 7379.7 |
| Required | | >1.000 | >1.000 | >1.00 | >1.00 | >1.00 | | | | | |

Table 9 : Static Loads (1/1)

| Joint | | Self Weight | | Normal Operating Level | | | |
|-------|--------------------|---------------|------------|------------------------|--------------|-------------|---------------|
| Joint | | Dam | | Upstream Reservoir | | Uplift | |
| ID | Upstream Elevation | Vertical Load | | Horizontal Load | | Normal Load | |
| | | D(kN) | Position x | Hnu(kN) | Elevation(m) | Un(kN) | Position l(m) |
| 1 | 60.00 | -215.2 | 4.570 | | | | |
| 2 | 50.00 | -2381.7 | 4.600 | | | | |
| 3 | 40.00 | -5700.5 | 6.133 | 128.1 | 41.703 | 452.7 | 6.020 |
| 4 | 30.00 | -10886.3 | 6.515 | 1119.9 | 35.037 | 1926.3 | 8.664 |
| 5 | 20.00 | -17939.0 | 11.090 | 3092.7 | 28.370 | 4177.8 | 11.307 |
| 6 | 10.00 | -26858.7 | 13.721 | 6046.5 | 21.703 | 7207.2 | 13.950 |
| 7 | Base | -37645.4 | 16.370 | 9981.2 | 15.037 | 7379.7 | 16.593 |

Table 10 : Static Loads (2/2)

| Joint | | Flood Level | | | |
|-------|--------------------|--------------------|--------------|-------------|---------------|
| Joint | | Upstream Reservoir | | Uplift | |
| ID | Upstream Elevation | Horizontal Load | | Normal Load | |
| | | Hnu(kN) | Elevation(m) | Un(kN) | Position l(m) |
| 1 | 60.00 | | | | |
| 2 | 50.00 | 261.4 | 52.433 | 362.8 | 3.377 |
| 3 | 40.00 | 1468.0 | 45.767 | 1532.6 | 6.020 |
| 4 | 30.00 | 3655.6 | 39.100 | 3480.3 | 8.664 |
| 5 | 20.00 | 6824.3 | 32.433 | 6206.0 | 11.307 |
| 6 | 10.00 | 10973.9 | 25.767 | 9709.5 | 13.950 |
| 7 | Base | 16104.5 | 19.100 | 9374.0 | 16.593 |

Table 11 : Pseudo-Static Loads (Seismic Coefficient)-Stress Analysis

| JOINT | | Inertia Load | | | | Reservoirs (Operating Level) | |
|-------|--------------------|-----------------|---------------|---------------|---------------|------------------------------|---------------|
| JOINT | | Dam | | | | Upstream | |
| ID | Upstream Elevation | Horizontal Load | | Vertical Load | | Horizontal Load | |
| | | Qh (Kn) | Elevation (m) | Qv (kN) | Position x(m) | Hdu (kN) | Elevation (m) |
| 1 | 60.00 | -34.4 | 60.500 | -23.0 | 4.570 | | |
| 2 | 50.00 | -381.1 | 55.469 | -254.0 | 4.600 | | |
| 3 | 40.00 | -912.1 | 49.101 | -608.1 | 6.133 | -66.1 | 42.044 |
| 4 | 30.00 | -1741.8 | 42.241 | -1161.2 | 8.515 | -336.2 | 36.044 |
| 5 | 20.00 | -2870.2 | 35.376 | -1913.5 | 11.090 | -720.3 | 30.044 |
| 6 | 10.00 | -4297.4 | 28.551 | -2864.9 | 13.721 | -1190.9 | 24.044 |
| 7 | Base | -6023.3 | 21.762 | -4015.5 | 16.370 | -1734.3 | 18.044 |

Table 12 : Pseudo-Static Loads (Seismic Coefficient)

| JOINT | | Inertia Load | | | | Reservoirs (Operating Level) | |
|-------|--------------------|-----------------|---------------|---------------|---------------|------------------------------|---------------|
| JOINT | | Dam | | | | Upstream | |
| ID | Upstream Elevation | Horizontal Load | | Vertical Load | | Horizontal Load | |
| | | Qh (Kn) | Elevation (m) | Qv (kN) | Position x(m) | Hdu (kN) | Elevation (m) |
| 1 | 60.00 | -10.8 | 60.500 | -7.2 | 4.570 | | |
| 2 | 50.00 | -119.1 | 55.469 | -79.4 | 4.600 | | |

Table 14 : Pseudo - Dynamic Loads (Chopra' S Method) - Stress Analysis (2 / 2)

| JOINT | | VERTICAL LOADS | |
|-------|------------------------|----------------|----------------|
| | | DAM | |
| | | VERTICAL LOAD | |
| ID | Upstream Elevation (m) | Eqv (kN) | Position x (m) |
| 1 | 60.000 | -28.5 | 60.504 |
| 2 | 50.000 | -246.6 | 56.009 |
| 3 | 40.000 | -440.1 | 51.142 |
| 4 | 30.000 | -620.8 | 46.491 |
| 5 | 20.000 | -754.2 | 42.751 |
| 6 | 10.000 | -830.4 | 40.261 |
| 7 | Base | -855.0 | 39.293 |

Table 15 : Pseudo - Dynamic Loads (Chopra' S Method) - Stability Analysis (1 / 2)

| JOINT | FIRST MODE | | | | HIGHER MODES | | | | MODAL COMBINATION | | | |
|------------------------|----------------------|-----------------|-----------------|-----------------|----------------------|-----------------|-----------------|-----------------|-------------------|----------|---------------|--------|
| | RESERVOIR (UPSTREAM) | | TOTAL | | RESERVOIR (UPSTREAM) | | TOTAL | | | | | |
| | DAM HORIZONTAL LOAD | HORIZONTAL LOAD | HORIZONTAL LOAD | HORIZONTAL LOAD | DAM HORIZONTAL LOAD | HORIZONTAL LOAD | HORIZONTAL LOAD | HORIZONTAL LOAD | | | | |
| Upstream Elevation (m) | Eq1 (kN) | Hd1 (kN) | Elevation (m) | Em1 (kN) | Elevation (m) | Hds (kN) | Elevation (m) | Hds (kN) | Elevation (m) | Emc (kN) | Elevation (m) | |
| 1 | 60.000 | -28.5 | | 60.504 | -28.5 | | | 60.506 | 14.8 | 60.506 | -32.1 | 60.504 |
| 2 | 50.000 | -246.6 | | 56.009 | -246.6 | | | 56.639 | 102.2 | 56.639 | -266.9 | 56.101 |
| 3 | 40.000 | -440.1 | | 50.886 | -452.6 | | | 56.437 | 109.9 | 56.439 | -466.0 | 51.216 |
| 4 | 30.000 | -620.8 | | 45.576 | -681.8 | | | 227.787 | 12.8 | 33.763 | -43.3 | 45.508 |
| 5 | 20.000 | -754.2 | | 41.238 | -866.9 | | | 12.705 | -220.2 | 27.833 | -381.8 | 38.518 |
| 6 | 10.000 | -830.4 | | 38.035 | -989.7 | | | 13.955 | -300.8 | 21.822 | -898.6 | 30.287 |
| 7 | Base | -855.0 | | 36.024 | -1055.4 | | | 9.698 | -458.7 | 16.008 | -1573.7 | 1894.8 |

Table 16 : PSEUDO - DYNAMIC LOADS (CHOPRA' S METHOD) - STABILITY ANALYSIS (2 / 2)

| | | DAM | |
|----|------------------------|---------------|----------------|
| | | VERTICAL LOAD | |
| ID | Upstream Elevation (m) | Eqv (kN) | Position x (m) |
| 1 | 60.000 | -7.2 | 4.570 |
| 2 | 50.000 | -79.4 | 4.600 |
| 3 | 40.000 | -190.0 | 6.133 |
| 4 | 30.000 | -362.9 | 8.515 |
| 5 | 20.000 | -598.0 | 11.090 |
| 6 | 10.000 | -895.3 | 13.721 |
| 7 | Base | -1254.8 | 16.370 |

V. CONCLUSIONS AND RECOMMENDATIONS

Results presented in this paper demonstrate that the response of concrete gravity dam-reservoir systems is significantly affected by various static and dynamic loading parameters. The design check of existing dam is performed, for the present PGA value of the earlier earthquake i.e. 0.16g, to assess whether seismic upgrading of Hirakud Dam is necessary from seismic safety point of view. It can be concluded from the present study that the dam section is safe for all possible load combinations and no further retrofitting measures are required for the section.

REFERENCES RÉFÉRENCES REFERENCIAS

1. Anatech Corporation" ANACAP-Concrete Analysis Program", Version 2.1e, 1997.
2. Bureau of Reclamation (1976)."Design of Gravity dams" A Water Resources Technical Publication.
3. Chopra A.K. *Dynamics of Structures – Theory and Application to Earthquake Engineering*. Prentice Hall, 2001.
4. Chopra A.K. and Hanchen T., "EACD-3D-96: A Computer program for 3-dimensional analysis of concrete Dam" University of California, Berkeley, California, Report No.UCB/SEMM-96/06,October 1996.
5. Fenves and Chopra A.K. (1987)"Simplified Analysis of Concrete Dams", Journal of Structural Engineering, ASCE, Vol.113, No.8, pp1688-1708.
6. FERC (Federal Energy Regulatory Commission). Chapter III Gravity Dams. In: Federal Energy Regulatory Commission, Office of Hydropower Licensing. Engineering guidelines for evaluation of hydropower projects. Washington, 2002.

7. Gupta I.D. (2002)"The state of the art in Seismic Hazard Analysis", ISET Journal of Earthquake Technology, Paper No.428, Vol.39, No.4, December 2002, pp 311-346.
8. ICOLD (1989) 'Selecting Parameters for Large dams-Guidelines and Recommendations' ICOLD Committee on Seismic Aspects of Large dams, Bulletin 72.
9. Koltuniuk, R.M., HVD-8110-MDA-97-4,"Non-linear Dynamic Structural Analysis of Hoover Dam Including Modelling of Contraction Joint Opening and Concrete Cracking ", Bureau of Reclamation, September 1997.
10. Kramer, Steven L.1996, Geotechnical Earthquake Engineering, Prentice Hall, 653 pp.
11. Krinitzsky, E. L. (1995), Deterministic versus probabilistic seismic hazard analysis for critical structures, Eng Geol 40, 1–7.
12. Mills,B.L.,HVD-8110-MDA-97-5,"Kinematic studies to determine the stability of postulated independent concrete blocks indicated by the non-linear analysis of Hoover Dam during Seismic Loading", Bureau of Reclamation, December 1997.
13. National Research Council (NRC) 1985, Safety of Dams; Flood and Earthquake Criteria, Washington D.C; National Academy Press.
14. O'Connell, D. and Ake, J., "Ground Motion Analysis for Hoover dam", Bureau of Reclamation, Seismotectonic Report 94-1, January 1995.
15. Payne, T.L.HVD-8110-MDA-97-2,"Linear Elastic Dynamic Structural Analysis including mass in the foundation for Hoover Dam", Bureau of Reclamation, April, 1998.
16. Sahu, Tejram 2006-07, NIT, Raipur, Chhattisgarh, "Seismic Hazard Analysis of Gangrel and Sondur Dam Sites", M.Tech.desertation.
17. Sarma S. K. (1975), Seismic stability of earth dams and embankments. Geotechnique, 25, 743 - 761, ISSN: 0016-8505.
18. Scott, G."RIGID-Dynamic Response of Jointed Rock Masses", University of Colorado, 1982.
19. United States Committee on Large Dams,"U.S. and World Dam, Hydropower and Reservoir Statistics", USCOLD Committee on Register of Dams, 1995.
20. USBR, *Design of Gravity Dams*. Denver: United States Department of the Interior – Bureau of Reclamation, 1976.
21. Westergaard H. M., "Water pressure on dams during earthquakes" *Transactions ASCE*, v. 98, n. 1835, pp. 418-433, 1933.

