



GLOBAL JOURNAL OF RESEARCHES IN ENGINEERING
CIVIL AND STRUCTURAL ENGINEERING
Volume 13 Issue 5 Version 1.0 Year 2013
Type: Double Blind Peer Reviewed International Research Journal
Publisher: Global Journals Inc. (USA)
Online ISSN: 2249-4596 & Print ISSN: 0975-5861

Estimating the 3-Second Gust on Rooftops of Residential and Low-Rise Buildings during a Hurricane

By S. A. Hsu

Louisiana State University, United States

Abstract - After the passage of a hurricane numerous infrastructures suffer water and wind damages. From engineering meteorology viewpoint, many cases are related to the impact of the wind on a roof. In order to estimate the wind speed on a roof, the three second gust is employed according to ASCE-7 for the wind load analysis. However, since there is no 3-s gust measurement on a roof, constant disputes occur as to who is liable to pay for the damages. After a brief review of recent literature, this technical note provides a methodology to resolve these disputes objectively. The formula is verified by full-scale field measurements during Hurricanes Frances and Ivan. Furthermore, in order to help engineers and contractor estimate the 3-s gust on the rooftop, methods are provided so that the needed 3-s gust can be computed from wind speed measurement available routinely from airports.

Keywords : wind speed on roofs; rooftop jet; gust factor; turbulence intensity; hurricanes.

GJRE-E Classification : FOR Code: 290804



ESTIMATING THE 3-SECOND GUST ON ROOFTOPS OF RESIDENTIAL AND LOW-RISE BUILDINGS DURING A HURRICANE

Strictly as per the compliance and regulations of :



RESEARCH | DIVERSITY | ETHICS

© 2013. S. A. Hsu. This is a research/review paper, distributed under the terms of the Creative Commons Attribution-Noncommercial 3.0 Unported License <http://creativecommons.org/licenses/by-nc/3.0/>), permitting all non commercial use, distribution, and reproduction in any medium, provided the original work is properly cited.

Estimating the 3-Second Gust on Rooftops of Residential and Low-Rise Buildings during a Hurricane

S. A. Hsu

Abstract - After the passage of a hurricane numerous infrastructures suffer water and wind damages. From engineering meteorology viewpoint, many cases are related to the impact of the wind on a roof. In order to estimate the wind speed on a roof, the three second gust is employed according to ASCE-7 for the wind load analysis. However, since there is no 3-s gust measurement on a roof, constant disputes occur as to who is liable to pay for the damages. After a brief review of recent literature, this technical note provides a methodology to resolve these disputes objectively. The formula is verified by full-scale field measurements during Hurricanes Frances and Ivan. Furthermore, in order to help engineers and contractor estimate the 3-s gust on the rooftop, methods are provided so that the needed 3-s gust can be computed from wind speed measurement available routinely from airports.

Keywords : wind speed on roofs; rooftop jet; gust factor; turbulence intensity; hurricanes.

I. INTRODUCTION

During a tropical cyclone along hurricane-prone coastal regions, many residential and low-rise buildings suffer structural damages, particularly their roofs. When the 3 second gust on a roof exceeds 33 m/s (74 mph), insurance companies should pay for these damages. However, many disputes occur between the insurance companies (representing the contractors) and the lawyers for the insurers because it is usually difficult to estimate the 3- s gust speed. The purpose of this technical note is to help engineers and contractors so that estimation of 3-s gust on roofs can be made objectively during hurricanes.

In the atmospheric boundary layer, the wind speed increases with height according to the power law such that

$$U_2 / U_1 = (Z_2 / Z_1)^P \quad (1)$$
$$Z_2 > Z_1$$

Where U_2 and U_1 are the wind speed at height Z_2 and Z_1 , respectively, and P is the exponent.

Eq. (1) has been used widely in engineering community (see e.g. ASCE 7-02, in Irwin, 2006). The

relationship between Eq. (1) and the more theoretically based logarithmic wind profile is provided in Hsu (1988). For detailed information relating the gust factor and the exponent P , see Hsu (2003 and 2008).

II. RELATIONSHIP BETWEEN G AND P

Since one minute sustained wind speed is used by the National Hurricane Center (see www.nhc.noaa.gov), from Hsu (2008), we have

$$G = 1 + 1.96 P \quad (2a)$$
$$= 1 + 1.96 TI$$

Where G is the gust factor (the ratio of 3-s gust to 1-min sustained wind Speed) and TI represents turbulence intensity.

Similarly, for 5 second gust over 2 minute period as used in wind speed measurements by the Automatic Surface Observing System (ASOS) station at airports worldwide,

$$G = 1 + 2.04 P \quad (2b)$$
$$= 1 + 2.04 TI$$

Where G is the gust factor (the ratio of 5-s gust to 2-min sustained wind speed) and TI represents turbulence intensity.

Further verification of G versus P is demonstrated in Fig. 1 for an industrial park (Crandell *et al.*, 2000). It is clear that a linear relationship between G and TI or P exists so that,

$$G - 1 = 2.13 TI \quad (3a)$$

Or

$$G = 1 + 2.13 TI \quad (3b)$$

$R^2 = 0.91$, indicating that 91% of the total variation of G can be explained by TI . Therefore, TI or P can be determined from the gust measurements such as at airports.

Author : Professor Emeritus and Certified Consulting Meteorologist, Coastal Studies Institute, Louisiana State University, Baton Rouge, LA 70803. E-mail : sahsu@lsu.edu

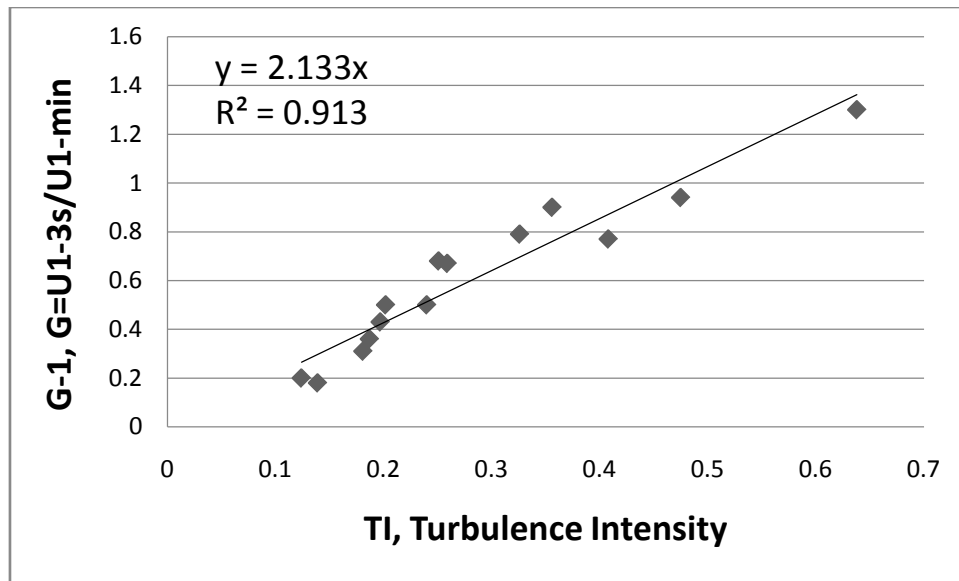


Figure 1 : Relationship between turbulence intensity and gust factor in an industrial park (Data source Crandell et al., 2000)

III. REVIEW OF RECENT LITERATURE

From engineering meteorology viewpoint, most cases dealing with buildings damaged by a tropical cyclone are related to the roofing system. In fact, during Hurricane Katrina in 2005, the roof of Louisiana Superdome in New Orleans, Louisiana, suffered severe damages. In addition, countless roofs in low-rise structures were destroyed by the gusty wind associated with Katrina.

Before cases are studied, some reviews of recent literature are helpful:

When air flows in a street canyon, Christen et al (2009) found that the highest turbulence intensity was located at 1.5 times the building height as depicted in Fig.2. Therefore, on the basis of Eq.(2a) and (2b), the gust factor is about two, meaning that the gust speed can be more than twice the sustained wind speed.

Because of this high gust speed we will name it as the rooftop jet. Note that at the rooftop edges and eaves, the gust factor can be 1.96 because $TI = 0.48$.

According to Aponte-Bermudez et al (2006), the average ratio of 3 second gust over one minute sustained wind speed for 10 residential houses in Florida during 5 hurricanes was 1.82 with a small standard deviation of 0.16. This means the coefficient of variation is only 9% (i.e. $0.16/1.82 = 0.09$), which is within the 10% error margin for the wind measurements as stated previously.

Measurements and computations for flow and turbulence in simulated city canyon were investigated by Zajic et al (see www.geo.uni.lodz.pl/~icuc5/text/0_33_4.pdf). They found that the velocity U_h at the building height h correlates well with the wind speed U_r

at the reference height Z_r , for the first row of containers according to a power-law profile such that

$$U_h/U_r = (h/Z_r)^{0.53} \quad (4)$$

Finally, in an urban area such as New York City during Hurricane Irene in 2011, the gust factor from ASOS station at Central Park was 1.86 whereas in its vicinity at LaGuardia and Kennedy Airports, the gust factors are 1.29 and 1.28, respectively (see Avila and Cangialosi, 2011). Substituting these gust factors into Eq. (2b), we get $TI = 0.42$ for the Central Park and 0.14 for the two airports nearby. These values are consistent with literatures in that $p = 0.40$ for the urban area and 0.16 for the flat open country known for a long time (see Davenport, 1965). The $TI (=0.42)$ is also in agreement with Fig.2, since the ASOS station in the Central Park is located near the top of many trees and some buildings.

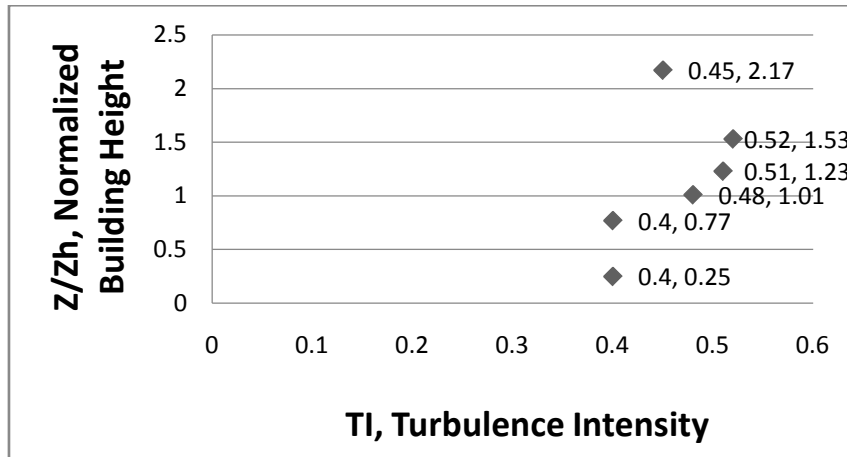


Figure 2 : Variations of the turbulence intensity with normalized building height (Data source: Christen et al., 2009)

IV. FULL-SCALE MEASUREMENTS DURING HURRICANES

Bermudez et al (2006). Their results are summarized in Table 1.

Full-scale measurements for hurricane wind loads on residential structures were made by Aponte-

Table 1 : Verification of Equation (4) Based on Full-Scale Measurements of Three Second Gust on Rooftops in Low-rise Residential Buildings during Hurricanes in 2004 (Data Source: Aponte-Bermudez et al., 2006)

Hurricane	House ID	City, State	House Anemometer Height, m	Rooftop Measurements, 3-second, m/s	Rooftop Jet From Eq.(4), 3-second, m/s	Estimated Open Exposure At 10m, 3-s, m/s
Frances	FL-06	Jensen Beach, FL	7.062	40.6	39.3	47.3
Ivan	FL-30	Pensacola, FL	6.553	48.7	40.7	50.9
	FL-27	Gulf Breeze, FL	6.553	36.6	34.6	43.3
	FL-26	Navarre, FL	6.096	26.3	30.5	39.7
	FL-24	Destin, FL	6.096	25	26.8	34.8
	FL-23	Destin, FL	6.096	25.4	25.8	33.5
			Mean	33.8	33.0	41.6

V. OBJECTIVE METHODOLOGY

According to Marshall (see http://ams.confex.com/ams/pdf_papers/137547.pdf), during Hurricane Katrina, there was an anemometer located at 1.5m above the southeast roof corner on a 16m high building at Ingalls Shipyard in Pascagoula, Mississippi, USA. That anemometer recorded 3-second wind gust up to 53 m/s. On the other hand, an anemometer located at nearby Trent Lott International Airport recorded a peak 3-second gust of 41.6 m/s at 10m. These precious data provide us an opportunity to verify Eq. (4) as follows:

By setting $U_r = 41.6$ m/s, $h = 16$ m (the roof height), and $Z_r = 10$ m into Eq. (3), we have $U_h = 53$ m/s, which is the same as measured.

Further verification of Eq. (4) is provided in Table 1. Since the difference between the two means (i.e. 33.8 m/s as measured on rooftops versus 33.0 m/s as estimated by Eq. (4)) is only 2.4%, Eq. (4) is also very useful for estimating the 3-second gust impacting on the rooftop by hurricanes. Note that the 3-s gust is needed to determine whether the insurance companies are liable to pay the home-owners. In U.S., if the 3-s gust exceeds 33 m/s or 74 miles per hour as Category One

Hurricane, the insurance company usually reimburses the home-owner to replace the roof damages.

On the basis of foregoing analyses, it is recommended that for the estimation of three second wind gust impacting on a building, Eq. (4) can be employed to determine the rooftop jet speed. This finding should be very useful for structural engineers as well as insurance industry, since constant disputes occur between the insurance companies and insurers. Now, we can apply Eq. (4) to determine objectively the magnitude of the 3-second gust on a rooftop using the 3-second gust measurement from ASOS station normally located at airports. If the 3-s gust is not available from ASOS, remedial methods are provided in the next section.

VI. ESTIMATING THE THREE-SECOND GUST FROM ASOS MEASUREMENTS

Because the 3-second gust data is not always available, we need to estimate it from the 2-minute sustained wind speed, which is routinely measured and reported from ASOS station at airport. On the basis of simultaneous wind speed measurements between ASOS and Texas Tech stations during Hurricane Bonnie as provided in Table 2 (see Schroeder, 1999) we can get the needed 3-second gust by multiplying the 2-minute sustained wind speed by a factor of 1.38. This factor is obtained from the ratio of $33.6/24.4 = 1.38$.

Table 2 : Comparison of nearly simultaneous measurements of wind speeds as obtained via Texas Tech University and ASOS Stations for Hurricane Bonnie (Data source: Schroeder, 1999). Unites are in m/s

	ASOS Station	Texas Tech Station
0.2-Second Gust	NA	38.2
3-Second Gust	NA	33.6
5-Second Gust	32.9	33.5
1-Minute Sustained	NA	25.0
2-Minute Sustained	25.2	24.4

VII. TRANSITION OF TERRAIN EXPOSURE

According to ASCE-7, (see, e.g., Zhou and Kareem, 2002), the variation of wind profile due to different terrain exposures, e.g. urban versus rural must be taken into account. In this regard, methods provided in Zhou and Kareem (2002) can be employed.

VIII. CONCLUSIONS

On the basis of aforementioned analyses and discussions, we conclude that the three second gust impacting on residential or low-rise building roofs during a hurricane can be determined from Eq. (4) objectively. Methods are also provided that the needed 3-s gust can be computed from the routine wind measurements at

the airports. These methods should help engineers and contractors resolve the disputes arising from damages caused by a hurricane. However, since the wind profile varies with the terrain exposure, adjustment of terrain transition needs to be taken into account

REFERENCES RÉFÉRENCES REFERENCIAS

- Aponte-Bermudez, L.D., Gurley, K., and Reinhold, T. (2006). Hurricane wind loads on Residential Structures: Full-Scale Measurements and Analysis from 2004 and 2005. Fourth LACCET International Latin American and Caribbean Conference for Engineering and Technology (LACCET 2006), "Breaking Frontiers and Barriers in Engineering: Education, Research, and Practice", 21-23 June 2006, Mayaguez, Puerto Rico.
- Avila, L.A. and Cangialosi, J. (2011). Tropical Cyclone Report, Hurricane Irene (AL092011), 21-28 August 2011. Available online at www.nhc.noaa.gov.
- Christen, A., Rotach, M.W., and Vogt, R. (2009). "The Budget of Turbulent Kinetic Energy in the Urban Roughness Sublayer." *Boundary-Layer Meteorol.* 131, 193-222.
- Crandell, J. H., Farkas, W., Lyons, J.W. (2000). "Near-ground Wind and its Characterization for Engineering Applications." *Wind and Structures*, 3 (3), 143-158.
- Davenport, A. G. (1965). *The Relationship of Wind Structure to Wind Loading*, National Physical Laboratory, Symposium No. 16, Wind Effects on Buildings and Structures, (Her Majesty's Stationary Office, London, 1965), pp.54-102.
- HSU, S. A. (1988). *Coastal Meteorology*, Academic Press, San Diego, CA. 260pp.
- HSU, S. A. (2003). "Estimating Overwater Friction Velocity and Exponent of Power-Law Wind Profile from Gust Factor during Storms." *J. Waterway, Port, Coastal and Ocean Engineering*, July/August 2003, pp.174-177.
- HSU, S. A. (2008). "Estimating 3-second and Maximum Instantaneous Gusts from 1-minute Sustained wind Speeds during a Hurricane." *Electronic J. Structural Engineering*, 2008, 77-79.
- IRWIN, P.A. (2006). "Exposure Categories and Transitions for Design Wind Loads." *J. Structural Engineering*, November 2006, 1755-1763.
- MARSHALL, T. P., *Wind Versus Water Damage to Buildings: A Meteorological Perspective*, (<http://ams.confex.com/ams/pdfpapers/137547.pdf>).
- SCHROEDER, J. L. (1999). *Hurricane Bonnie Wind Flow Characteristics*, a Dissertation in Civil Engineering, Texas Tech University, Accepted in December 1999.
- ZAJIC, D., Fernando, H. J. S., Brown, M. J., Kim, J., and Baik, J., *Flow and Turbulence in Simulated City*

Canyons; Measurements and Computations (see www.geo.uni.lodz.pl/~icuc5/text/0_33_4.pdf).

13. Zhou, Y., and Kareem, A., 2002, Definition of wind profile in ASCE 7, Journal of structural Engineering, August 2002, pp.1082-1086.



This page is intentionally left blank