



GLOBAL JOURNAL OF RESEARCHES IN ENGINEERING: A
MECHANICAL AND MECHANICS ENGINEERING
Volume 16 Issue 4 Version 1.0 Year 2016
Type: Double Blind Peer Reviewed International Research Journal
Publisher: Global Journals Inc. (USA)
Online ISSN: 2249-4596 Print ISSN: 0975-5861

The Effect of the Eccentric Loading on the Components of the Spine

By Samir Zahaf, Hamani Habib, Bensamine Mansouri, Abderrahmane Belarbi
& Zitouni Azari

University of Sciences and Technology

Abstract- The objective of this work is to study the effect of the backpack on the components of the spine system of a child, know the effect of an eccentric load on the intervertebral discs, the creating a 3D model of the spine of child of 80 kg overall weight under the effect of three eccentric load (P2, P3, P4) plus P1 compression load and calculated by the element method ends, For the boundary conditions we fixed the sacrum (Embedding the sacrum). We propose in this section to draw up a comprehensive study of the distributions of stresses and normal elastic strain of Von Mises in the intervertebral discs based on loads supported.

Keywords: child; herniated discs; lumbar-thoracic; intervertebral discs; finite element; biomechanics; von mises stress-strain; disc degeneration.

GJRE-A Classification: FOR Code: 091399



Strictly as per the compliance and regulations of:



The Effect of the Eccentric Loading on the Components of the Spine

Samir Zahaf^α, Hamani Habib^σ, Bensamine Mansouri^ρ, Abderrahmane Belarbi^ω & Zitouni Azari[¥]

Abstract- The objective of this work is to study the effect of the backpack on the components of the spine system of a child, know the effect of an eccentric load on the intervertebral discs, the creating a 3D model of the spine of child of 80 kg overall weight under the effect of three eccentric load (P2, P3, P4) plus P1 compression load and calculated by the element method ends, For the boundary conditions we fixed the sacrum (Embedding the sacrum). We propose in this section to draw up a comprehensive study of the distributions of stresses and normal elastic strain of Von Mises in the intervertebral discs based on loads supported. The results show that the stress and strain of Von Mises are highest and concentrated in four intervertebral discs (D1, D15, D16 and D17), which causes a problem that calls (herniated disc). We concluded that the cause of the posterior load, a 350 mm lever arm with a 200N load present maximum Von Mises stresses concentrated in four intervertebral discs (D1, D15, D16, D17), which justifies the distance between the load which is the point of application of the load and the axis of the spine plays a very important role in increasing the solicitation of the latter.

Keywords: child; herniated discs; lumbar-thoracic; intervertebral discs; finite element; biomechanics; von mises stress-strain; disc degeneration.

1. INTRODUCTION

The spine or rachis consists of a movable column of 24 free vertebrae and a fixed column formed of fused vertebrae: the sacrum and coccyx (Fig. 2) ; it is the fixing strut of many essential muscles in the posture and locomotion and protects the spinal cord located in the vertebral canal ; it supports the head and transmits the weight of the body to the hip joints; with a length of about 70 cm in men (60 cm in women), its reduction may reach 2 cm when standing [1].

Intervertebral discs connect the vertebral bodies, provide the mobility of the column and amortize them pressure and shocks. Each consisting of a peripheral annulus (annulus) containing a gelatinous core (nucleus). Disc degeneration begins, after a phase of asymptomatic dehydration, with tears in the fibrous ring. The core can then migrate into the thickness of the ring and cause acute or chronic back pain. If it moves further through the ring, the ring may protrude to the rear

side of the disc while forming a HERNIATED DISC this is indicated in (Fig. 1) and (Fig. 2). This hernia can migrate into the spinal canal and even extrude leaving the disc. This disc herniation can come compress or "stuck" in one or more nerve roots located near the drive. It is the cause of symptoms: pain is sciatica when the back of the thigh, cruralgia when the pain is in front of the thigh [2] see Figure 1 and figure 2.

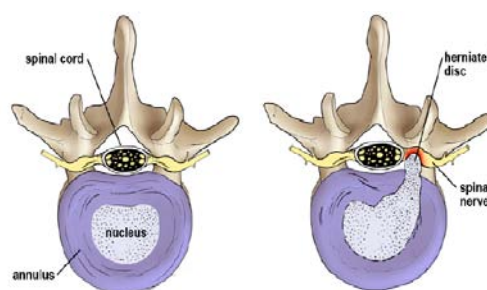


Fig. 1: Normal disc (top). Herniated disc (bottom) shows the gel-filled nucleus escapes through a tear in the disc annulus and compresses the spinal nerve [3].

It is the cause of symptoms when sciatic pain is in back of the thigh, crural when pain is in front of the thigh. It comprises variably pain in the lower limbs, numbness or tingling sensation (paraesthesia), the sensitivity to disturbance of sensation (dysesthesia) up to a complete loss of feeling (anesthesia), loss muscle strength or partial or complete paralysis or sphincter disorders. continuously exerted, the pressure of the herniated disc can cause irreversible damage [2].

Author ^α ^σ ^ρ [¥]: Department of Mechanical Engineering, University of Sciences and Technology, Oran, Algeria.

e-mails: zahafsamir1983@gmail.com, Hamanihabib31@gmail.com, Smail_mansouri@yahoo.fr, azari@univ-metz.fr

Author ^ω: Laboratory of Biomechanics, Polymers and Structures, ENIM-Metz, France. e-mail: belarbi_abd@yahoo.fr

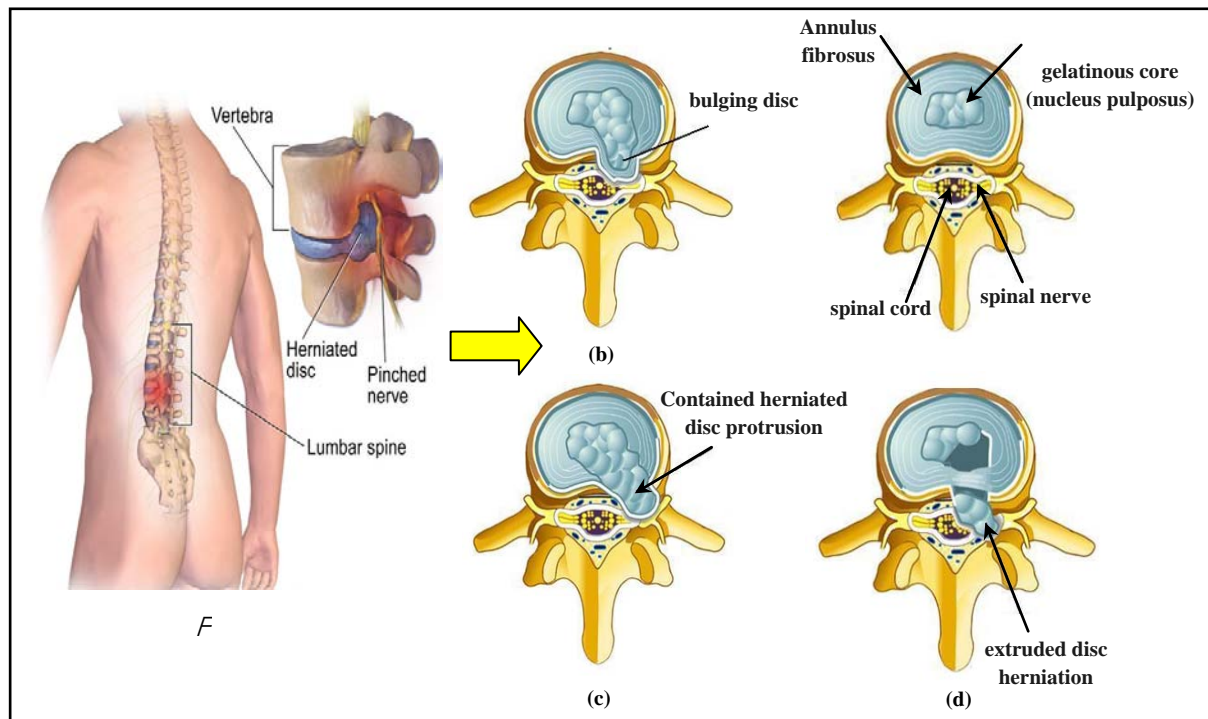


Fig. 2: Evolutionary forms of the herniated disc. (a) back pain. (b) - crack the annulus, (c) -progression the disc material, (d) – prolapse [4]. & www.espalda.org

Every year it is the same finding, schoolchildren satchels or bags to back are too heavy and can cause long-term back problems and deformities of the spine that is to say students complain of back pain, shoulder pain, muscle pain, knee pain, pain in the neck, numbness pain, bad posture, poor balance and falls due at the port of a backpack overloaded view \"(Fig. 3) \" [5].



Fig. 3: A school child wears a backpack.

Worse, their weight increases over the years from 6.5 kg in 1997 to 8 kg today in the best case. This would amount to carry to an adult of 80 kg weight 17 kg Yet the official circular of 2008 National Education clearly

advocates that the weight of the backpack should not exceed 10% of the weight of the child, ie, primary, about 2.5 kg ... we're off!! It is between 8 and 15 years back is the most fragile, and scientific studies have demonstrated imaging (MRI), the risk of joint damage and intervertebral disc are real [5].

Yet the official circular of 2008 National Education clearly advocates that the weight of the backpack should not exceed 10% of the weight of the child, either primary, about 2.5 kg ... we're off!! It is between 8 and 15 years back is the most fragile, and scientific studies have demonstrated imaging (MRI), the risk of joint damage and intervertebral disc are real [5].

During this period of school age, the spine of children is particularly rough ride. With their school bags too heavy, students are real porter, causing stiffness and pain, which are themselves a source of bad posture on often inadequate seating.

It is in this context daily, as well as family education, the accumulation, repetition of these situations will cause joint damage, common causes such as scoliosis. This explains the fact that 67% of students suffer from muscle tension, 50% of back pain, 24% falling asleep during classes and 15% of pain in the shoulders [5]. The schoolbag defined as an eccentric load \"(Fig. 3) \", the load represented by the mass (P4), in other words, this load created a moment of posterior bending which tends to bend the spine and causes a problem called lumbar disc herniation is the most common cause of low back pain.

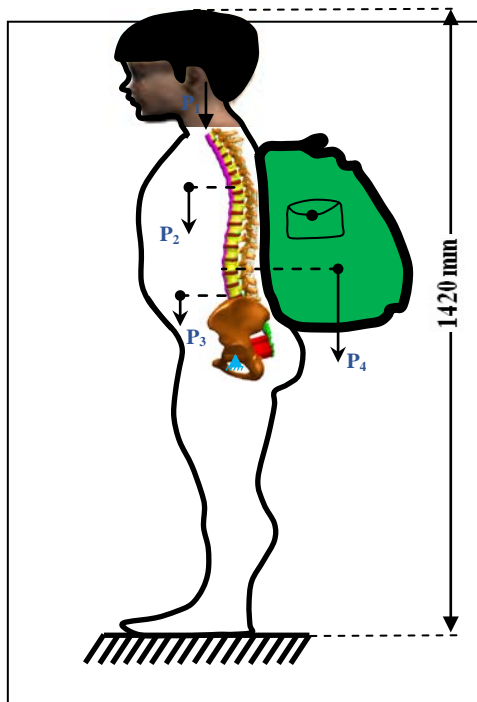


Fig. 4: Model biomechanics of the spine (A school child wears a backpack).

The diagram (Fig. 4) represents a child to age 10 years of overall specific weight 38 kg to wear a backpack, backpack is the mass of 15 kg representing the weight P_4 .

The MRI study [6], alerts of this overweight effect in the development of degenerative disc disease, back pain and then herniated disc (Fig. 5).

In this work, the simulation of the disc degeneration, based on a finite element model of the spine depending on the mechanical properties were established; the boundary condition has been applied in the frontal plane to define restriction on movements of translation and rotation of the spine.

We propose in this work to draw up a comprehensive study of stresses and strains in the spinal discs distributions based on supported loads. The results show that the level of degeneration increased in all intervertebral discs but concentrated in the four disks D1, D15, D16 and D17.

Fig. 5 shows two vertebrae of the spinal column with an intervertebral disc under the effect of a compound loading (compression P_1 + bending moment P_4). The compressive load P_1 creates an internal pressure in the nucleus, this pressure will there after generate the disc degeneration or degenerative disc disease (Fig. 5) and (Fig. 7), as regards the forward flexion P_4 , if the load of the schoolbag increases, automatically distance between the point of load application and the axis of the spinal column increases, we see that the posterior portion of the annulus fibrosis is compressed and the other front portion is tensioned, that is to say the nucleus pulposus

burst back (posterior compression), this compression produced by disc protrusion comes into contact with a nerve root called herniated disc this mentioned in (Fig. 2).

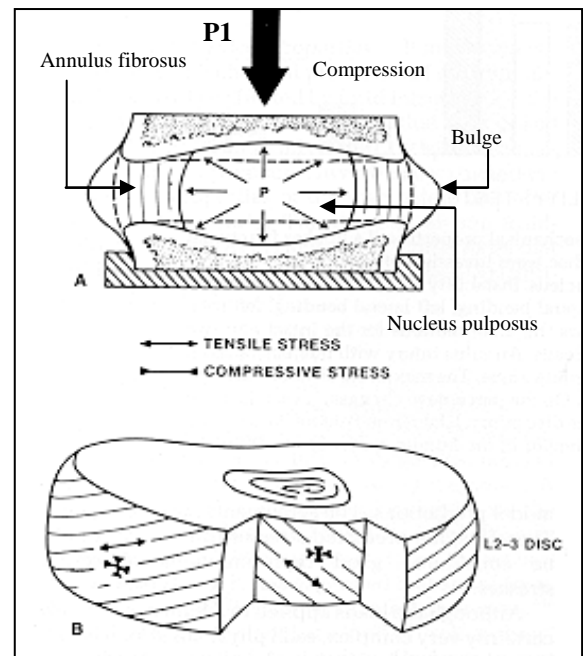


Fig. 5: The intervertebral disc with (a): compression [7].

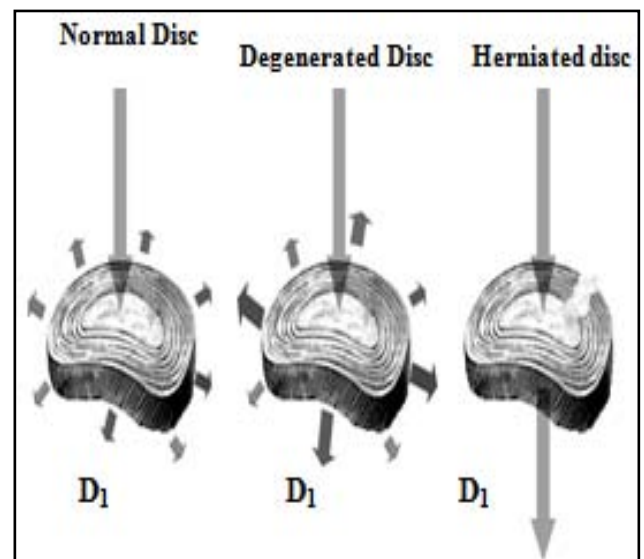


Fig. 6: Load distribution at the disc D1 according to his state [8].

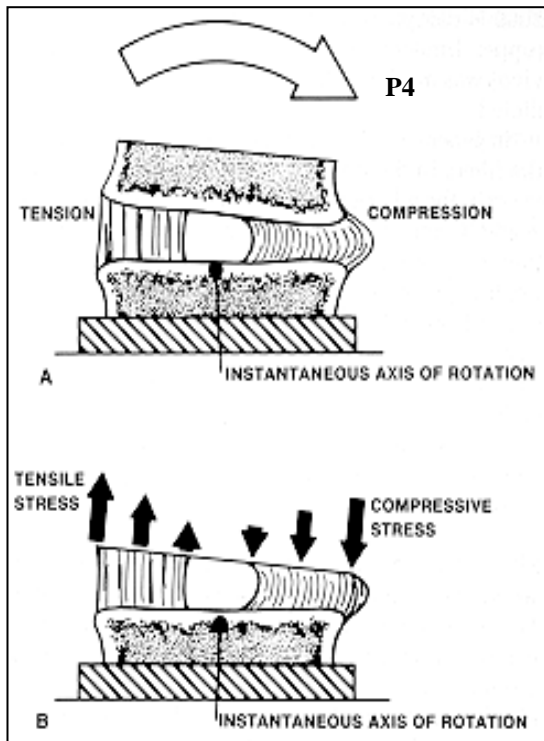


Fig. 7: The intervertebral disc with (b): bending [7].

II. MATERIAL AND METHODS

The objective of this study was to investigate the effects induced by an eccentric load of the backpack on the back of a child, know the effect of an eccentric load on the intervertebral discs, cortical bone, cancellous bone, posterior bone, sacrum, basin, created a 3D model of spine, the total mass of person standing of specific global 80kg under the effect of three eccentric loads (p2, p3, p4) plus a p1 compression load and calculated by the finit element method, the boundary conditions we fixed the sacrum (incorporation of the sacrum) see \"(Fig. 4) \".

The analysis of biomechanical problems includes several steps.

The first is to study the form to define the geometrical configuration of the object, which allows the reconstitution of the vertebra, the ligament and bone using CAD programs.

The result is a 3D geometric model including these three components will then be prepared for use in finite element analyzes for the study of stresses and strains distribution in the system.

The steps for the execution of the 3D vertebra model \"(Fig. 8) \" are as follow:

- Draw cortical bone that is the upper hinge and the lower hinge, then make the smoothing process; this gives a solid body called the vertebral body.
- Secondly, draw the posterior arch (blade with the pedicle) with the spinous process.
- Finally we draw the transverse process.

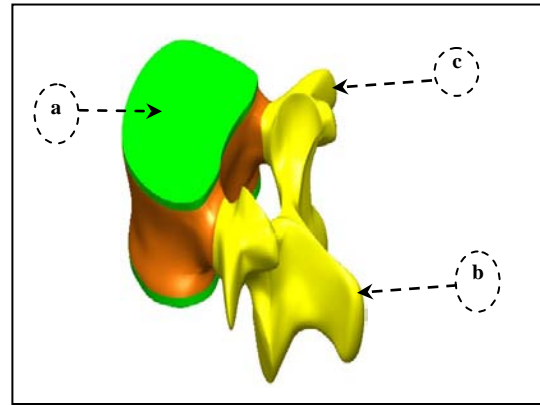


Fig. 8: Lumbar vertebrae.

The simulation of the disc degeneration is based on a finite element model of the healthy spine. Fig. 9 shows a spine model, this consists of five lumbar vertebrae (L1, L2, L3, L4 and L5) plus the sacrum and the basin, twelve thoracic vertebrae (TH1, TH2, TH3, TH4, TH5, TH6, TH7, TH8, TH9, TH10, TH11, TH12) and 17 inter vertebrae discs between (S1-L5, L5-L4, L4-L3, L3-L2, L2-L1, L1-TH12 TH12-TH11, TH11, TH10, TH10-TH9, TH9-TH8, TH8-TH7, TH7-TH6, TH6-TH5, TH5-TH4, TH3-TH4, TH3-TH2 TH2-TH1) and various ligaments thoracic lumbar spine (anterior longitudinal ligament, posterior longitudinal ligament, ligament interspinous, ligament supraspinatus, yellow ligament and capsular ligament), ligaments of the basin (sacroiliac posterior ligament, sacrotuberous ligament and interosseous ligament).

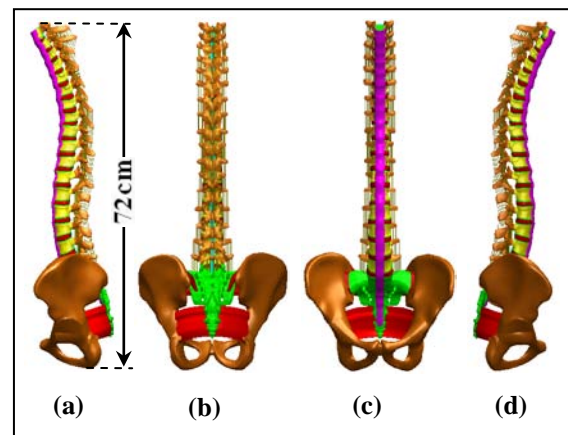


Fig. 9: Spine studied.

- (a): Lateral (left) view. (b): dorsal view. (c): front view.
(d): lateral (right) view

In static loading conditions, the model of the reconstructed spine is used in an analysis for studying the role of the inter vertebrae discs and the stress distribution in these disks as well as its supporting structures. The spine is reconstructed in 3D to study the system dimensions (IVD - ligament-bone) \"(Fig. 10)\".

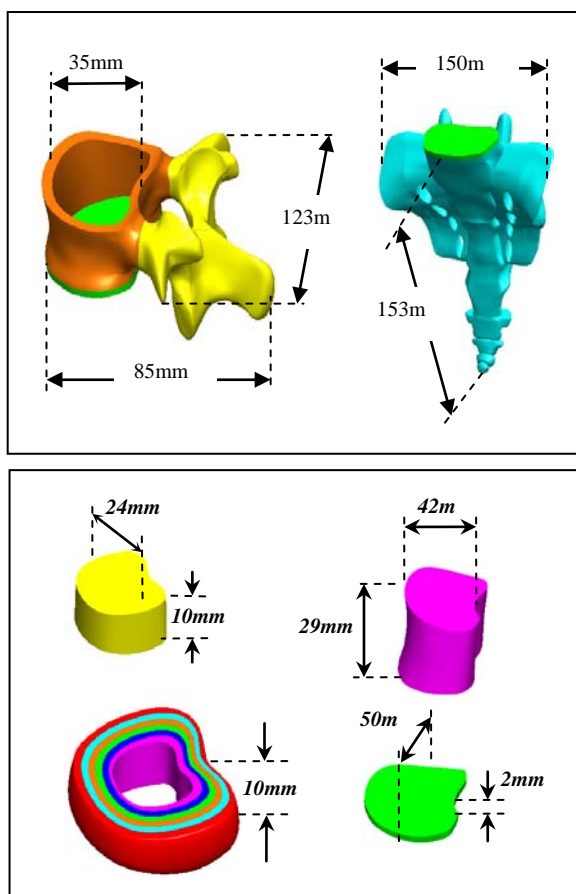


Fig. 10: Vertebra and sacrum dimensions.

In order to define the boundary conditions, restriction on movements of translation and rotation of the spine has been applied in the lower plane, and defined as having zero displacements. Several charges in the anterior direction were applied as follows:

- The application of the load on the upper side of the thoracic vertebra TH1.
- The fixed part applied to the body of the basin.
- The interfaces between the different components of the system of the spine, the cortical bone, the inter vertebral disk and ligament are treated as perfectly bonded interfaces \"(Fig. 10)\".

Fig. 9 shows an isometric view of an explored assembly of the spine and each component of the spine system is denoted by letters.

ABBREVIATIONS

- D4: intervertebral disk upstairs four.
 N4: nucleus in the intervertebral disc upstairs four.
 D2: intervertebral disk upstairs two.
 N2: nucleus in the intervertebral disc upstairs two.
 L2: lumbar vertebra is on level two.
 D4: intervertebral disk upstairs four.
 N4: nucleus in the intervertebral disc upstairs four.
 AF1: annulus fibrosus one.
 AF2: annulus fibrosus two.

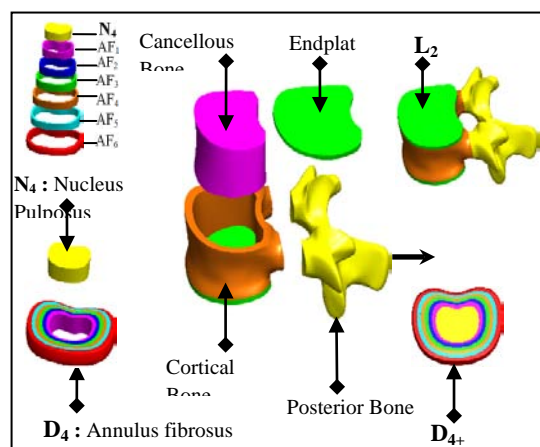


Fig. 11: 3D modeling thoracic vertebra L3, D4 disc of the lumbar spine (SOLIDWORKS 2016 software).

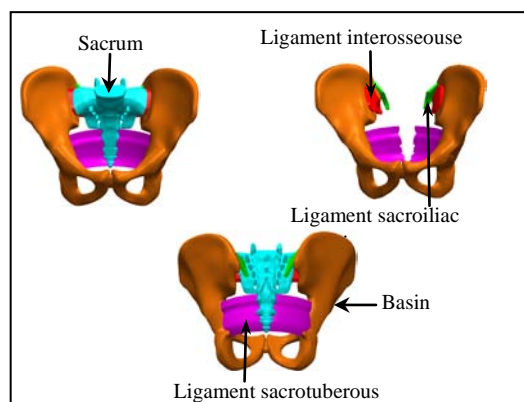


Fig 12: Model details of basin and sacrum (ligaments).

Table 1: Mechanical characteristics of disc tissue [9].

Authors	σ_r (MPa)
BROWN (axial direction)	1.4
GALANTE (horizontal direction)	3.5 ± 0.3
GALANTE (fiber direction)	10.7 ± 0.9
WU	3.7

The selection of constitutive equations of the vertebral bone is defined as the part of the bone which carries the inter vertebral disc, composed of cortical bone, cancellous bone, the posterior arch, with a Young's modulus of about 12000 MPa. It is well known that cortical bone has better load capacity than the cancellous bone. Cortical bone is considered as an isotropic material, and homogeneous linear elastic. Table 1 shows the tensile strength of the structure annulus fibrosis according to different authors. These materials are anisotropic and non-linear elastic.

The behavior of inter-transverse ligament and inter-spinous ligament is nonlinear viscoelastic as in

previous studies [10]; a linear elastic model is chosen to represent this behavior.

Ansys Workbench software was used for analyzing this geometry and generate the most suitable mesh. For the studied behavior, we used tetrahedral elements, type Solid187 conforming to defined parametric surfaces interfaces \"(Fig. 13)\".

It is necessary to mesh the components of the spine with small and confused elements to ensure optimum accuracy of the results of stresses and strains in the inter vertebral discs.

The material properties of the spine components were selected after a careful review of the published literature \"Table 2\"; it was considered appropriate to define the cortical and cancellous bone as homogeneous and isotropic. The magnitudes of 12000 MPa and 100 MPa (cortical and cancellous, respectively) were observed in all studies by various researchers.

Table 2: Material Properties Specified in the Model.

Material	Young Modulus (Mpa)	Poisson Coefficient	References
Cortical Bone	12000	0.3	[11,13,14,15,16,17,18,19,20,21,22,27,36]
Cancellous Bone	100	0.2	[11,14,15,17,18,19,21,22,24,25,26,27,36]
Posterior Bone	3500	0.25	[13,14,15,18,19,21,22,24,27,28,37]
Cartilage Endplates	12000	0.3	[21,23,25,29]
Annulus Ground Substance	4.2	0.45	[11,14,17,19,20,21,22,23,25,33,31,32,35,36,37]
Nucleus Pulposus	1	0.499	[12,14,15,16,18,20,21,27,30,33,34,35,36,37]
Anterior Longitudinal Ligament	20	0.3	[14,15,17,18,19,37]
Posterior Longitudinal Ligament	20	0.3	[14,15,17,18,37]
Ligamentum Flavum	19.50	0.3	[14,15,17,18,37]
Intertransverse Ligament	58.7	0.3	[14,15,17,18,37]
Inter-Spinous Ligament	11.6	0.3	[14,15,17,18,37]
Supra-Spinous Ligament	15	0.3	[14,15,17,18,37]
Capsular Ligament	32.9	0.3	[14,15,17,18,37]
The basin			[38]
Sacroterous Ligament	40	0.3	[38]
Sacroiliac posterior Ligament	40	0.3	[38]
Interosseouse Ligament	40	0.3	[38]

Since physiologically the nucleus is fluid filled, the elements were assigned low stiffness values (1MPa) and near incompressibility properties (Poisson's ratio of 0.499). Biologically, the annulus fibrosus is comprised of layers of collagen fibers, which attributes to its non-homogenous characteristics. However, due to limitations in modeling abilities, the annulus was defined as a homogenous structure with a magnitude of 4.2 MPa.

This was based on the modulus of the ground substance (4.2 MPa) and the collagen fibers reported in the literature, taking into account the volume fraction of


each component. The complete model of the spine \"(Fig. 13)\" was realized by the SOLIDWORKS SOFTWARE VERSION 2014 and was then transferred to the software Calculates each element ends ANSYS 16.2 WORKBENCHE generated the default mesh then generated linear global custom mesh tetrahedra 10 nodes conform to surface.

The three views of spine model with condensed mesh are shown in \"(Fig. 13)\". All element and node numbers are specified in \"Table 3\".

Fig. 13 shows a complete model that consists of 1178694 elements and 2005025 nodes. Cortical bone

Table 3: Element and node numbers in the column vertebral system components.

COMPONENT	NODES	ELEMENTS	Thickness
Cortical Bone	961810	644683	3mm
Cancellous Bone	244460	164441	3mm
Posterior Bone	226389	132464	3mm
Cartilage endplates	160055	87710	3mm
Annulus Ground Substance	244800	114036	3mm
Nucleus Pulposus	42449	26112	3mm
Anterior Longitudinal Ligament	45798	24467	3mm
Posterior Longitudinal Ligament	14414	6607	3mm
Ligamentum Flavum	30226	13447	3mm
Transverse Ligament	285328	131648	3mm
Inter-Spinous Ligament	28968	13158	3mm
Supra-Spinous Ligament	17833	8279	3mm
Capsular ligament	51816	24072	3mm
Sacrospinous Ligament	20878	10128	3mm
Sacroiliac posterior Ligament	5876	3280	3mm
Interosseous Ligament	13756	8306	3mm
TOTAL	2005025	1178694	3mm

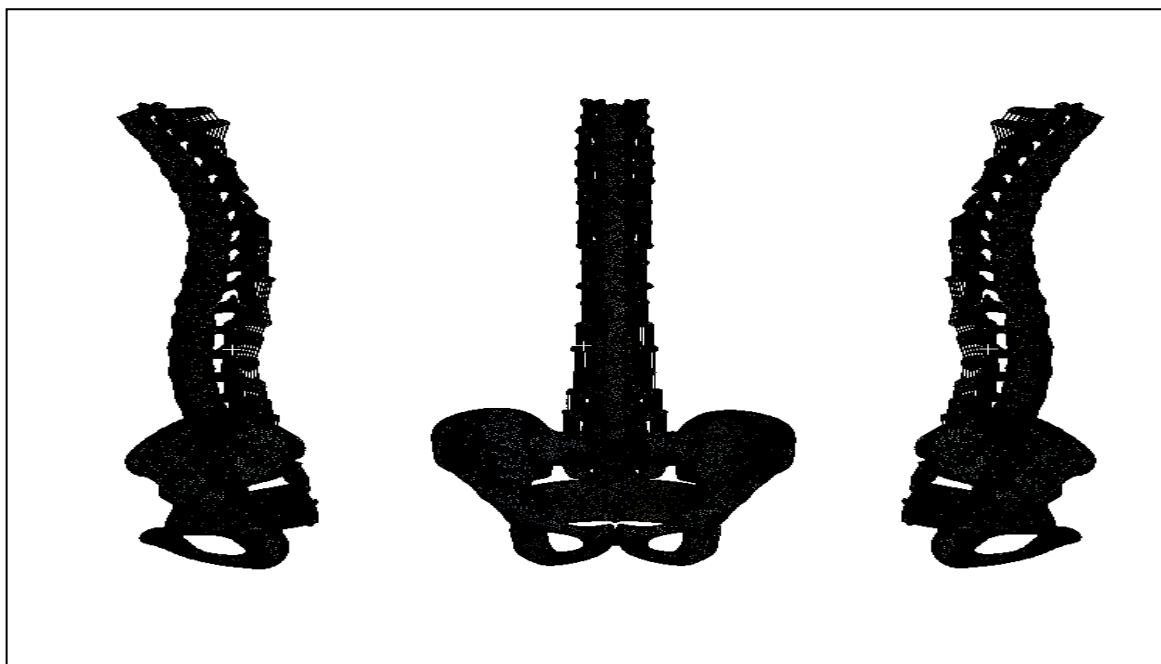*Fig. 13:* Spine 3D finite element modeling (ANSYS 16.2 software).

The posterior arch was modeled with tetrahedral elements to 10 nodes contains (132464 elements, 226389 nodes), the nucleus pulposus in the annulus fibrosus were modeled with tetrahedral type elements 10 nodes (26112 elements 42449 nodes), the annulus fibrosus were modeled with elements of type tetrahedral to 10 nodes (114036 elements, 244800 nodes).

The gelatinous cartilage modeled with a tetrahedral element to 10 nodes (87710 elements, 160055 nodes). Finally, the different types of ligaments generated by a tetrahedral mesh to 10 nodes "Table 3". The diagram in \ "(Fig. 4) \" shows a person standing of specific global 80kg weight, the overall mass (Head, Neck, Arm (left + right), Forearm (left + right), hand (left + right)) is 13,4517kg to divided by the top surface of the thoracic vertebrae Th1 representing the pressure P1, P2 load represents the mass of the body superior Trunk is 12,768kg, the distance between the point of application of the load and axis (yy ') is 200 mm \ "(Fig. 14) \".

The total mass of the lower trunk of the human body is equal to 22 kg; represented by P3, the distance between the point of application of the load and the axis (yy ') is 250 mm \ "(Fig. 14) \". P4 represents the maximum mass of the backpack is (20 kg), the distance between the point of load application and the axis (yy ') of the spine is (350 mm) \ "(Fig. 14) \".

For the boundary conditions we fixed the sacrum (Embedding the sacrum) \ "(Fig. 14) \". We propose in this section to draw up a comprehensive study of the distributions of stresses and elastic strain in the intervertebral discs, the cortical bone, cancellous bone, the posterior arch, anterior longitudinal ligament and posterior according to the supported loads. Distributions of global stress state for each component of our model were presented.

A quantitative analysis was performed based on a scale of progressive visual colors predefined by the software used (ANSYS Workbench 16.5), ranging from dark blue to red.

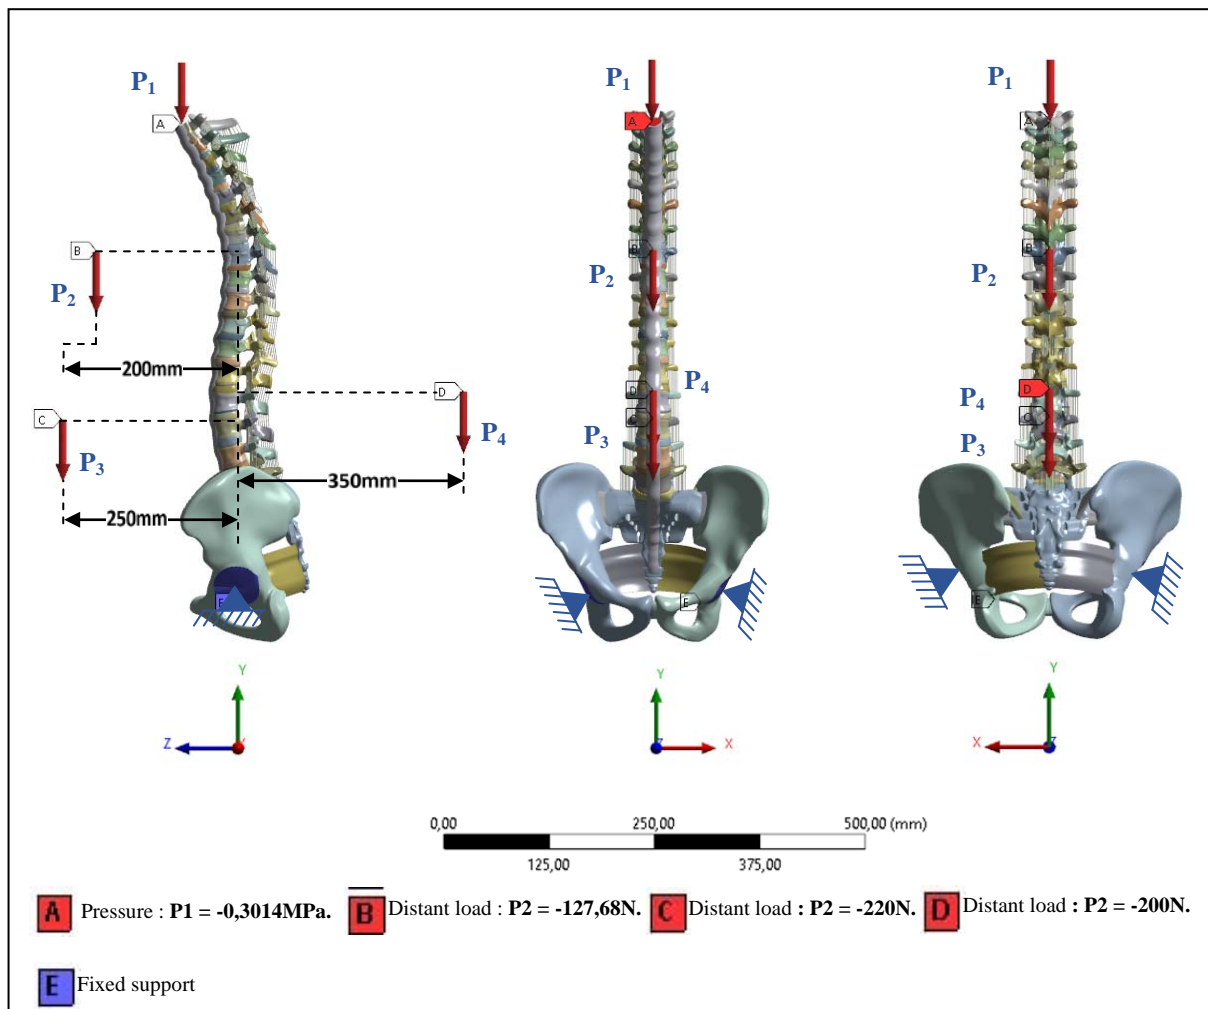


Fig. 14: Model biomechanics of the spine (posterior loading).

III. RESULTS

Fig (15) shows a histogram of stress and maximum strain of Von Mises, we notice that the spine undergoes a concentration of maximum stresses in the thoracic region, in the order word the stresses in the thoracic vertebrae (Th3, Th4, Th5, Th6, Th7) are respectively equal to (995,68MPa, 754.61 MPa, 467.09 MPa, 483.08 MPa, 369.65 MPa) as mentioned in \ "(Fig. 17) \".

Fig 16 shows a load applied to the upper surface of the thoracic vertebra TH1 of the spinal column causes a high concentration of maximum Von Mises strains in the anterior part of vertebral bodies (red section) this is mentioned in \ "(Fig. 17) \".

On the other hand, Fig 17 shows that the posterior arch of the thoracic vertebrae (Th3, Th4, Th5, Th6, Th7) absorbed the maximum von Mises stresses, these stresses were observed on a posterior side of the spine (red contour) with respect to other components of the system of the spine. Proceeding from the fact that the Fig (17) and (16) that watches the posterior load presents greater strains within two thoracic vertebrae (Th3, Th4) which are equal to (0.29194, 0.21867), which means that the so-called vertebrae are the most stressed in the case of posterior bending.

Fig (18) shows that the posterior loading presents maximum stresses and strains concentrated in the intervertebral disc D1 that is to say between the sacrum and the lumbar vertebra L5, in the order word the \ "(Fig. 19) \ " clearly shows that the loading posterior with a lever arm equal 350mm presents maximum Von Mises stresses and strains concentrated in the disc D1 and are respectively equal to (6,9797MPa, 1,7347mm / mm).

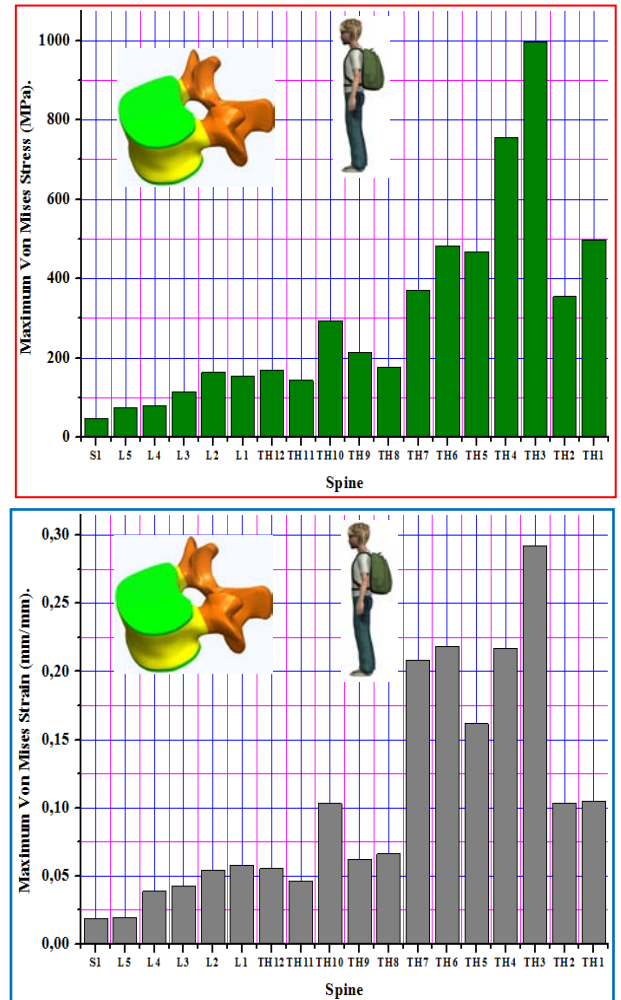


Fig. 15: Histogram of stress and strain in the spine for a load of 20kg.

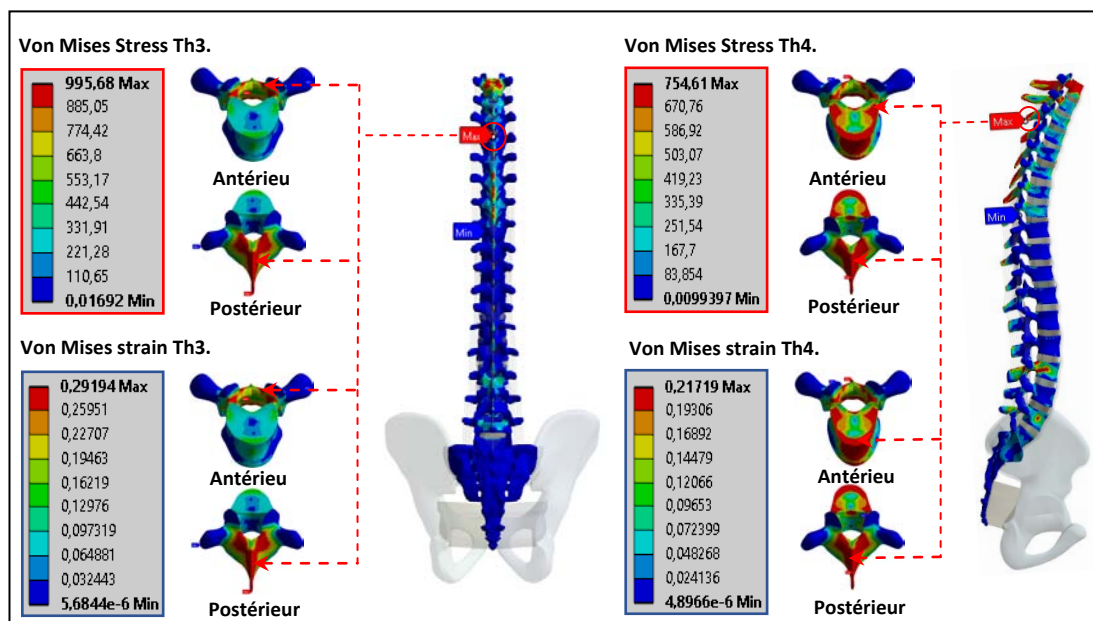


Fig. 16: Distributions of stresses and strains in the thoracic vertebrae (Th3, Th4) for a load of 20kg.

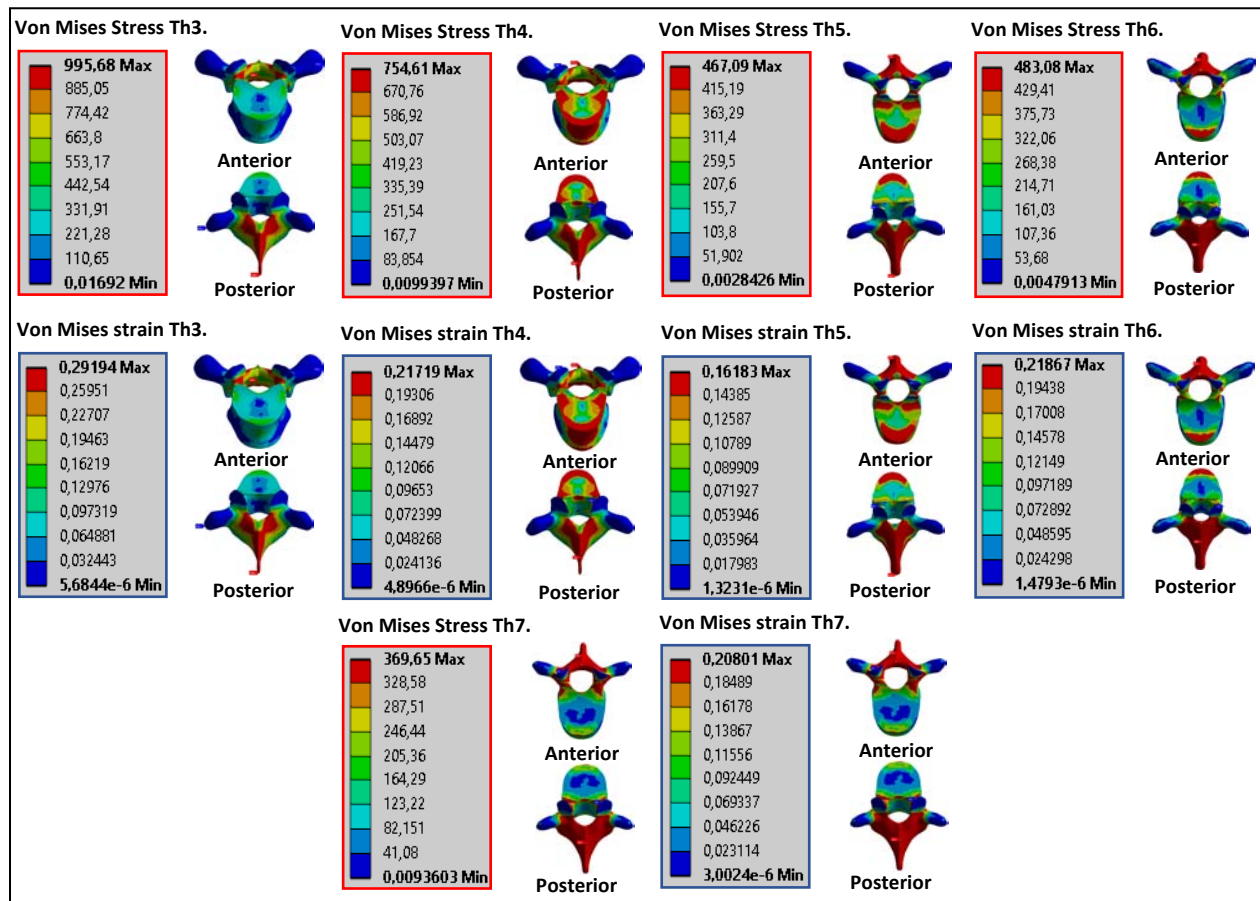


Fig. 17: Distributions of stresses and strains in the thoracic vertebrae a load of 20kg.

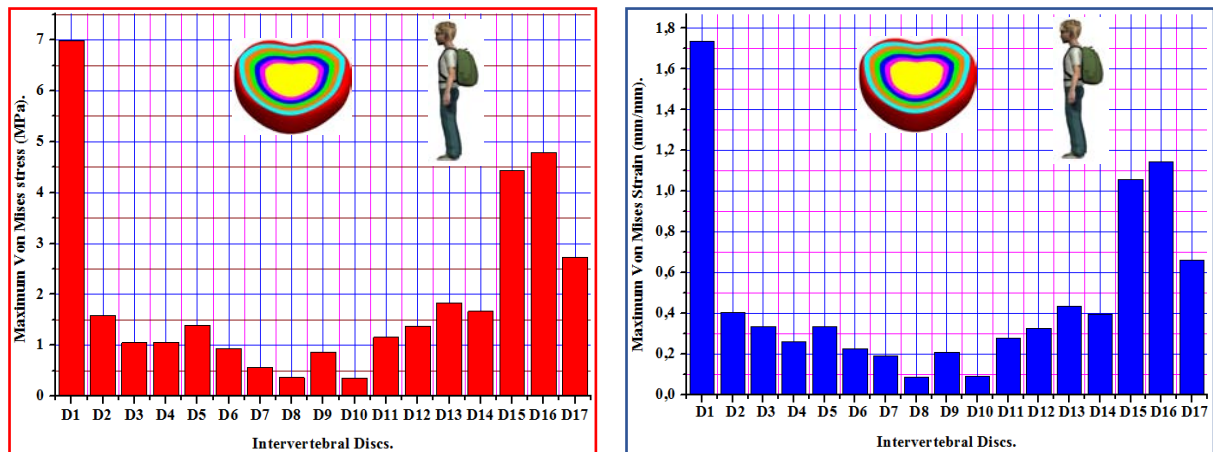


Fig. 18: Histogram of stresses and strains in the DIV for a load of 20kg.

We see in Fig (18) the intervertebral discs (D1, D15, D16, D17) absorbed the maximum stresses that equal (6,9797MPa, 4,4374MPa, 4,7858MPa, 2,7365MPa), On the other hand the posterior loading presents of maximum strains concentrated in the intervertebral discs (D1, D15, D16, D17) which are respectively equal to (1.7347, 1.0586, 1.1463, 0.66065) as mentioned in \ "(Fig. 19) \". Figure (9) shows that the mixed loading (P1 compression + bending moment (P3)) has a contour of maximum red part stresses in the disc D1 and we see in this figure the front part of the

disc D1 is pulled and another compressed part, other hand figure (9) clearly shows that the backpack is a repeated effort back into everyday life ultimately cause disc problems, particularly at the lumbar region (lumbar disc herniation).

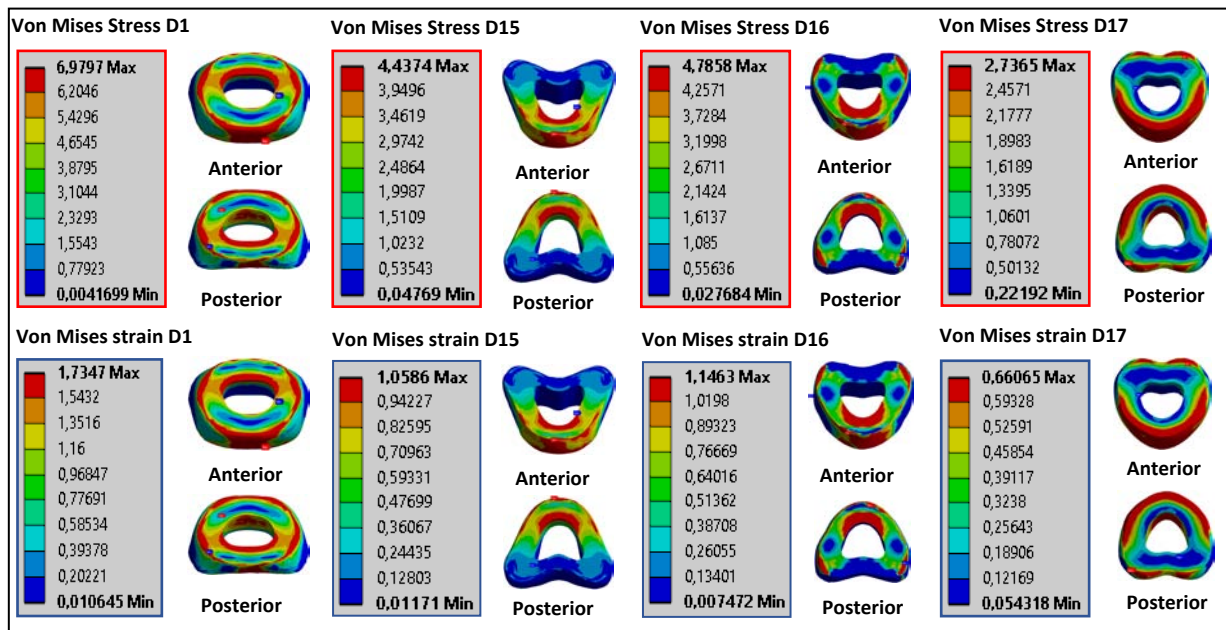


Fig. 19: Distributions of stresses and strains in the DIV for a load of 20kg.

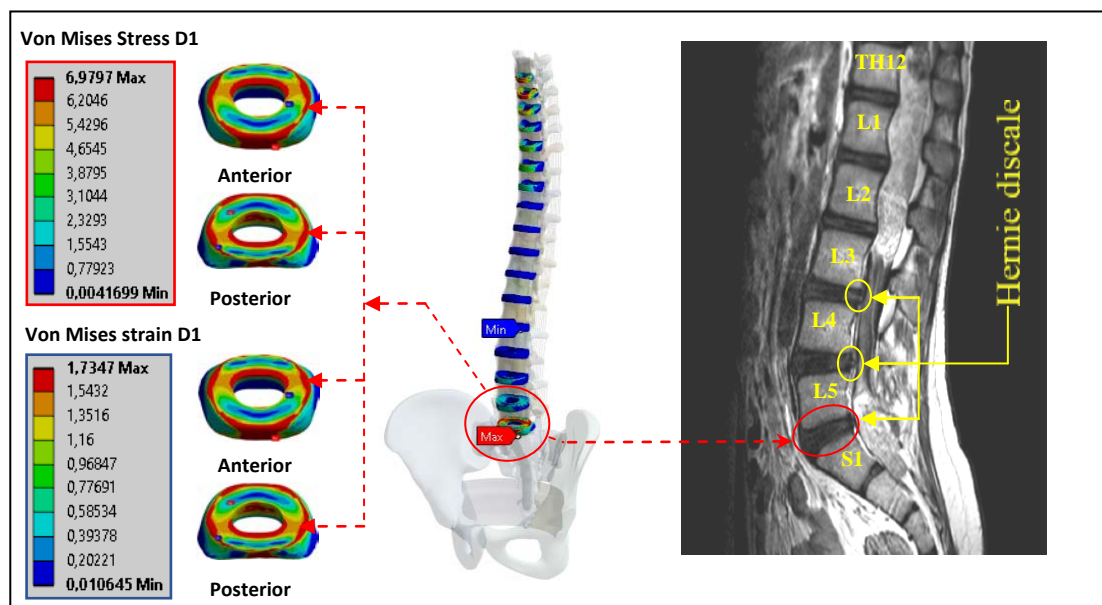


Fig. 20: Distributions of stresses and strains in the intervertebral disc D1 for a load of 20kg.

Fig (20) shows that the mixed loading (P1 compression + bending moment (P3)) has a contour of maximum stresses red part in the disc D1 and we see in this figure the front part of the disc D1 is pulled and another compressed part, other hand \ "(Fig. 20) \" clearly shows that the backpack is a repeated effort to back into everyday life ultimately cause disc problems, particularly at the lumbar region (lumbar disc herniation).

We see in Fig 21 that the backpack it's a very dangerous loading and with time creates pain in the 1st, 2nd intervertebral disc and causes sciatica or cruralgia, regarding the spinal nerve compressed by the two disks (D1, D2) and the pressure causes intense pain radiating throughout the leg, the path of pain follows closely the

path of the nerve. In extreme cases, this results in partial or complete paralysis of the leg.

A load applied to the upper surface of the thoracic vertebra TH1 of the spinal column causes a high concentration of normal maximum von Mises stresses in the anterior and posterior part of the cortical bone (S1, Th12, Th5, Th1) (parts by red) this is indicated in \ "(Fig. 22) \".

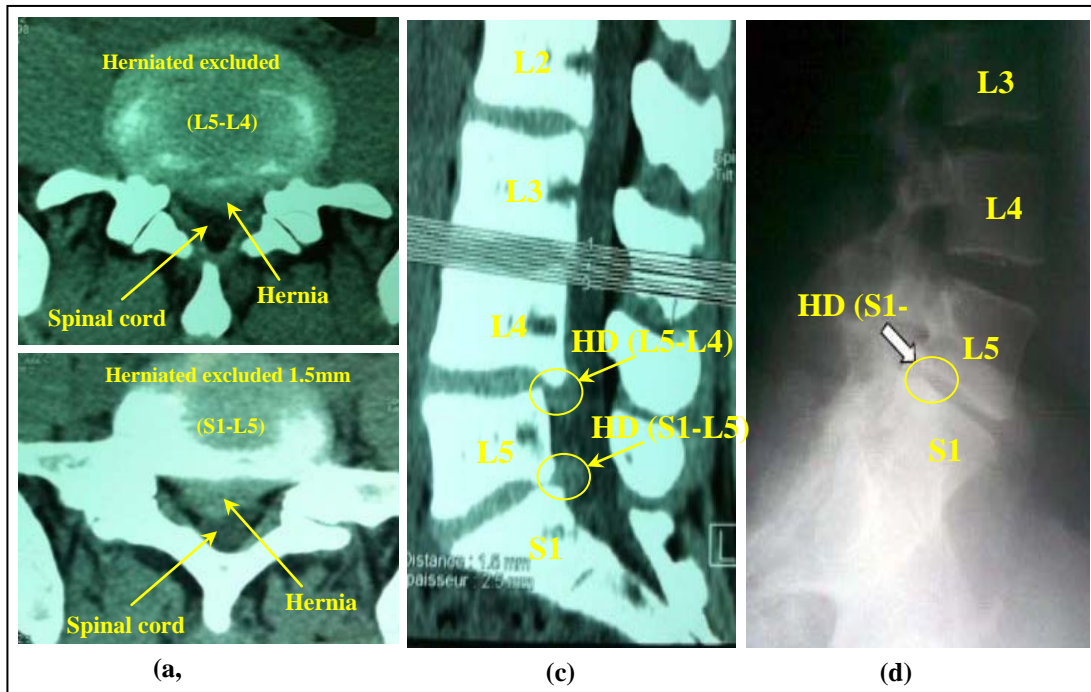


Fig. 21: Images of a girl 17 years old suffering back pain so severe, she was unable to walk. TDM spine lumbosacral axial section (a, b) and sagittal reconstruction (c) showing a double HD L4-L5 and L5-S1 (d) Standard radiography spine profile lumbosacral showing a pinch last intervertebral disc L5-S1.

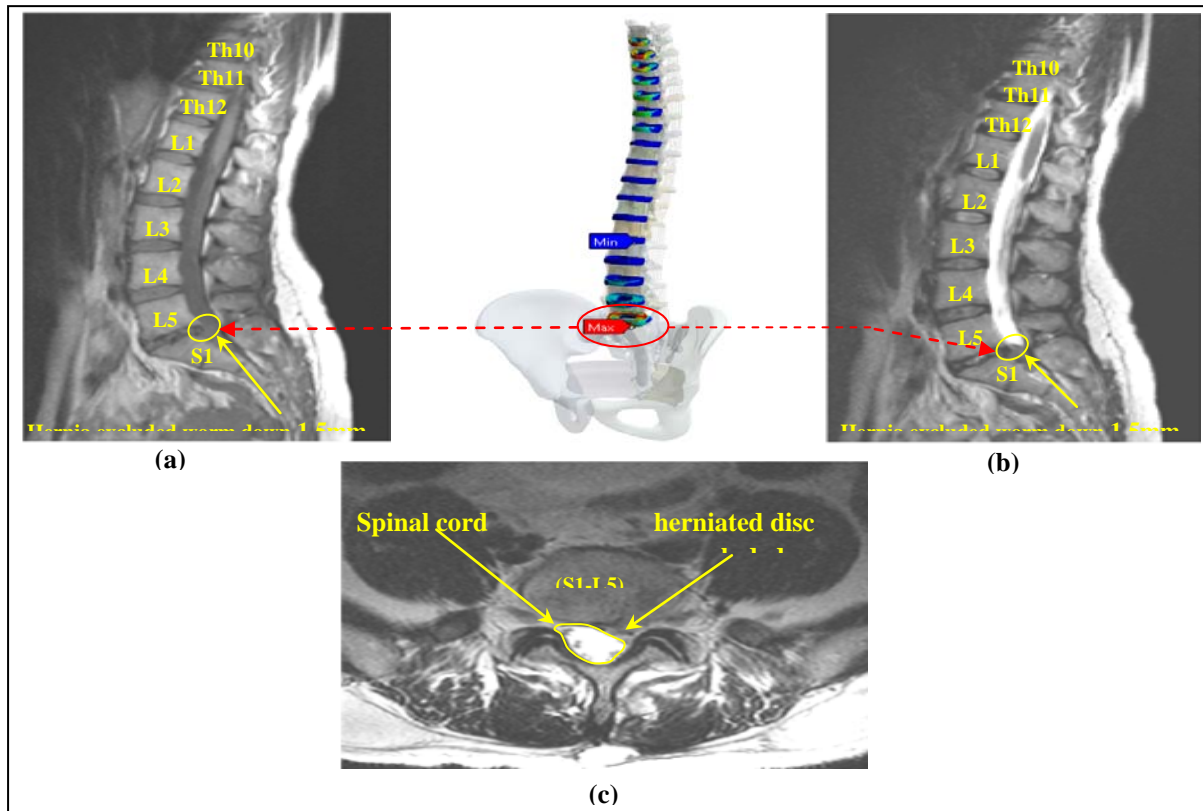


Fig. 22: MRI of the lumbar sacral spine of a 16-year-old boy showing: (a) MRI weighted sagittal sequence T1, T2, (b) weighted axial T2, (c) showing a herniated disc L5-S1 posterolateral left side and migrated down.

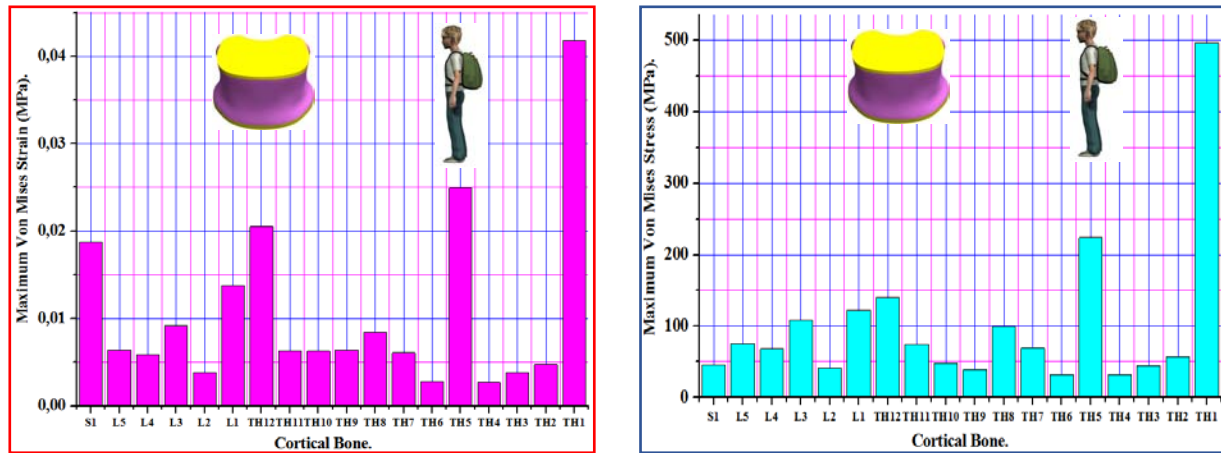


Fig. 23: Histogram of stresses and deformations in the cortical bone for load of 20kg.

On the other hand, \ "(Fig. 22) \" shows that the maximum von Mises stresses in the cortical bone (S1, Th12, Th5, Th1) are equal to (40,069MPa, 140.15 MPa 223.82 MPa 496, 69 MPa) as compared to other components of the system of the spine see \ "(Fig. 24) \". A loading of the posterior backpack applied on the upper surface of the thoracic vertebra TH1 of the spinal column causes a high concentration of maximum normal strains in the anterior part of the thoracic vertebra Th (red part) this is mentioned in \ "(Fig. 23) \", with regard to the said vertebra supported Von strain value set which are equal to (0,041791mm / mm) relative to the other components of the system of the spine.

Fig (25) shows a histogram of the stresses and strains Von put supported by the cancellous bone and it is noted that the maximum stress is concentrated in the cancellous bone of the thoracic vertebra Th1 as shown in \ "(Fig. 26) \".

The posterior load \ "(Fig. 3) \" shows clearly that the stresses and strains of Von Mises are concentrated in the two cancellous bone (Th1, Th5) and are respectively equal to (4.6282Mpa, 5.7386MPa) and (0.049594, 0.057685) this is mentioned in the (Fig 26)

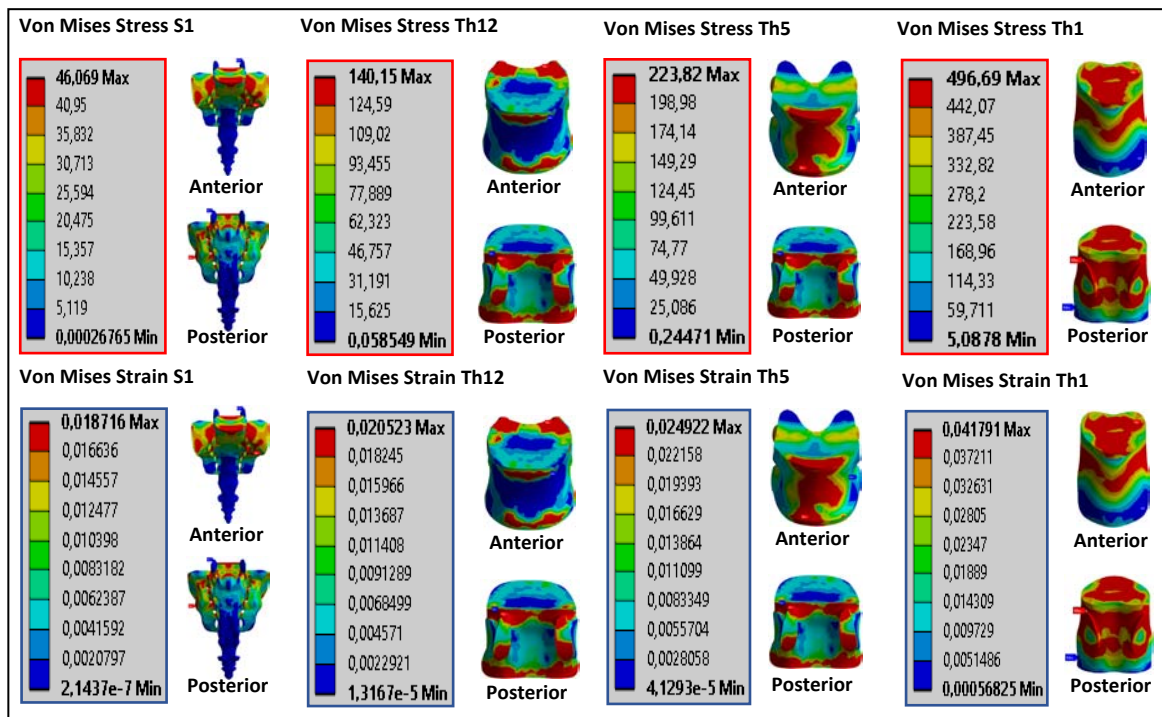


Fig. 24: Distributions of stresses and strains in the cortical bone for load of 20kg.

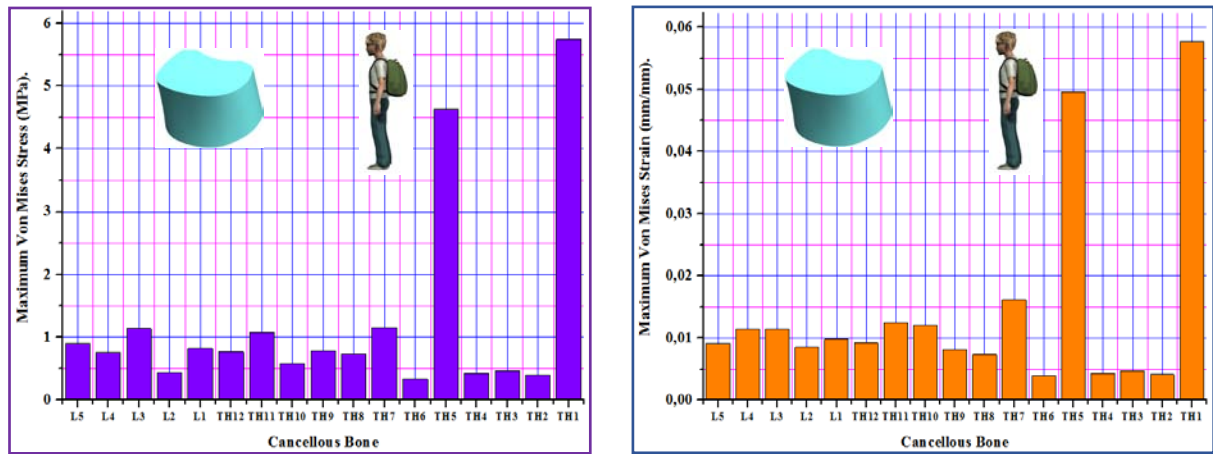


Fig. 25: Histogram of stresses and strains in the cancellous bone with a load of 20kg.

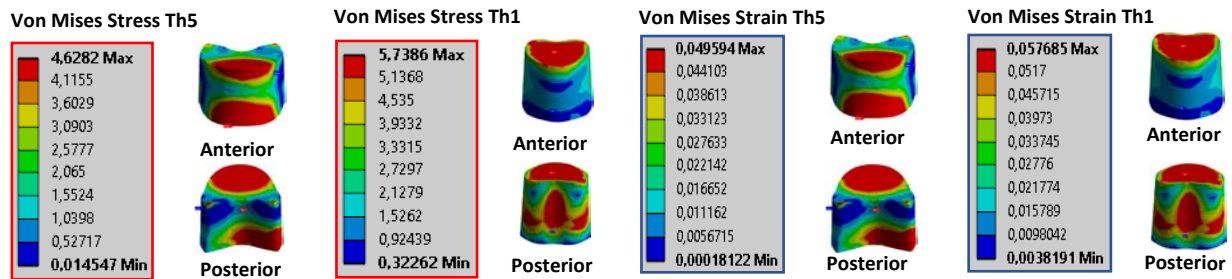


Fig. 26: Distributions of stresses and strains in the cancellous bone with a load of 20kg.

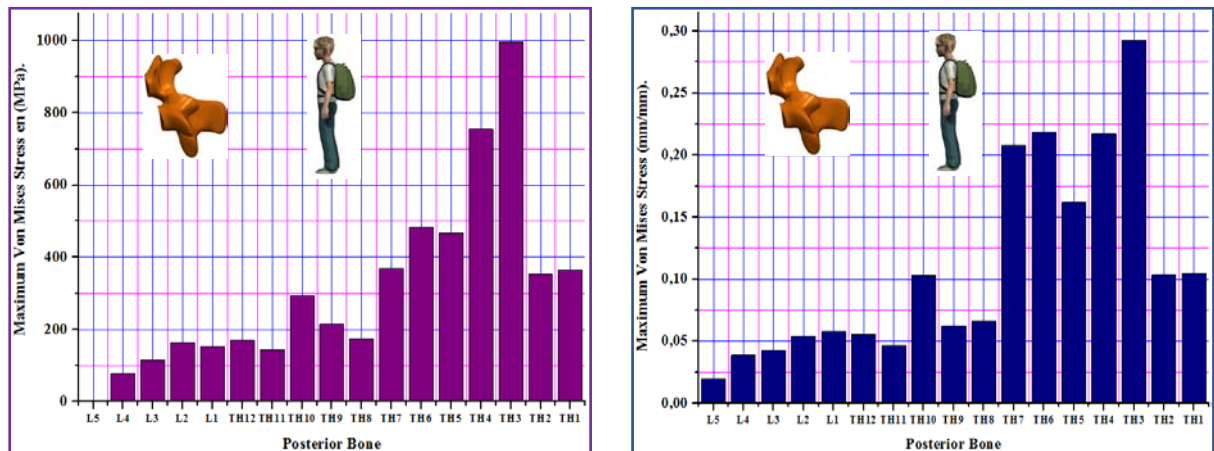


Fig. 27: Histogram of stresses and strains in the posterior arch for a load of 20kg.

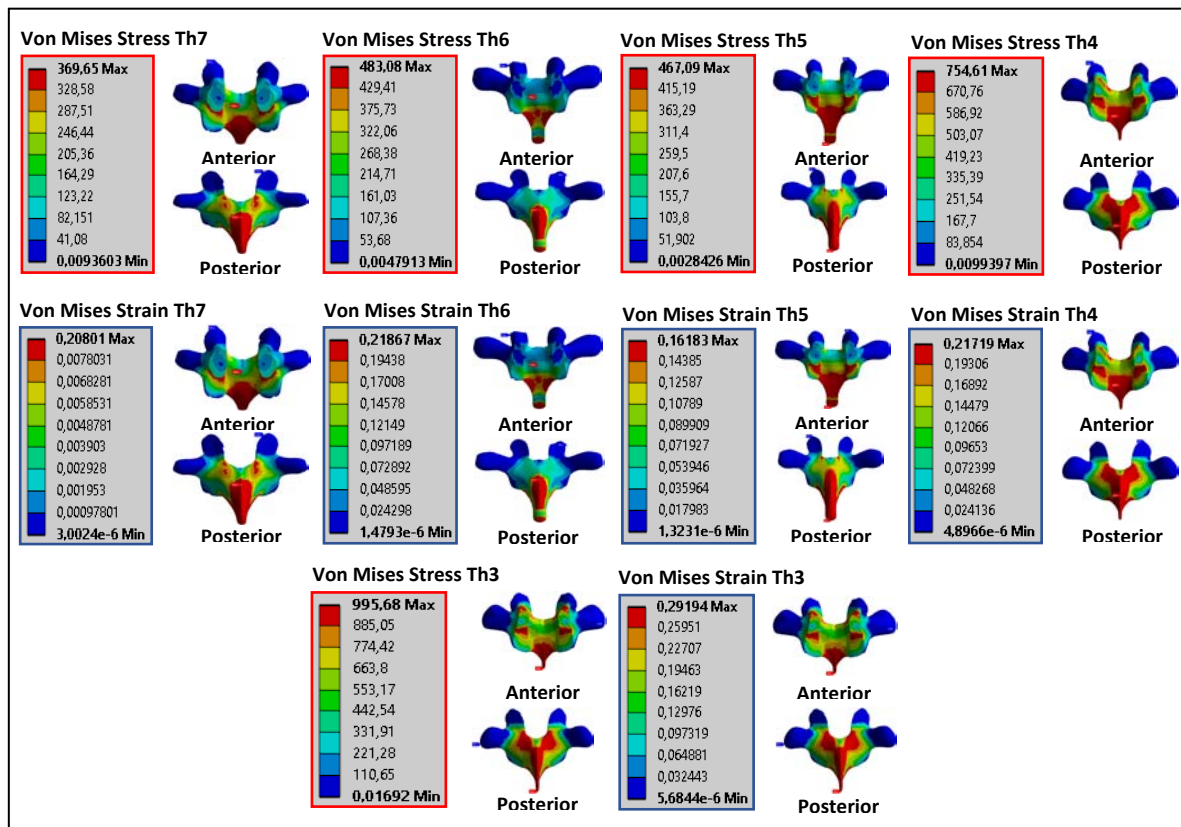


Fig. 28: Distributions of stresses and strains in the posterior arch for a load of 20kg.

The posterior loading of the backpack with a 350mm lever shown that increased stresses and strains of Von Mises illustrated in the face of upper and lower articulation of the posterior arch of the thoracic vertebrae (Th3, Th4, Th5, Th6, Th7) (red outline) \ "(Fig. 27) \", on the other hand \ "(Fig. 28) \ "shows clearly legend stress and strain of Von Mises put in the thoracic region (Th3, Th4, Th5, Th6, Th7) are respectively equal to (995,68MPa, 754,61MPa, 467,09MPa, 483,08MPa, 369,65MPa) and (0.29194, 0.21719, 0.16183, 0.21867,

0.21867) compared to other components of the system spine. We see in Figure 18 the role of the basin to transmit the load to the lower part of the human body and absorption stresses and strain Von bets (red outline), we note that the two bodies (basin, sacrum) supported stresses and normal elastic deformations which are equal to (46,069MPa, 28,201MPa) and (0.012947, 0.0187) relative to the other components of the system of the spine.

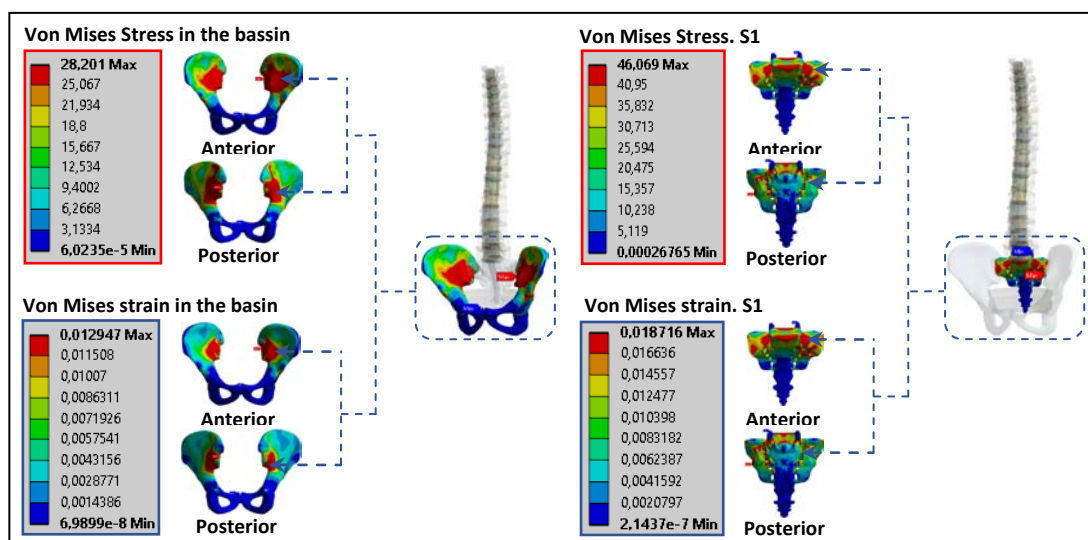


Fig. 29: Distributions of stresses and strains in the basin and sacrum for a load of 20kg.

IV. DISCUSSION

In sum, we concluded that the posterior loading is certainly an aggravating factor, and may cause long term back problems and strains of the spine, the 3D model of the spine of a child under the effect of an eccentric load and calculate by the FEM provokes stress and strains maximum of Von Mises concentrated in the intervertebral disc (D1) and are equal to (6,9797MPa, 1,7347mm / mm) as noted in the \ "(Fig. 18) \", with regard to \ "(Fig. 19, 20, 21) \ " show that the intervertebral disc (D1) is the most damaged which is disc degeneration often occurs after a phase asymptomatic dehydration cracks, tearing of annulus fibrosus (D1), the nucleus (N1) can then along these cracks migrate into the ring thickness (D1), and cause acute or chronic back pain, If the core (N1) move around more through the ring (D1), the core can project to the posterior surface of the disc while forming a lumbar disc herniation, this hernia can complete rupture of the ring, migrate laterally into the vertebral canal, or up or down, and even exclude leaving the disk, herniated disc that can come be compressed one or more nerve roots "stuck" near the disc, causing the symptoms of pain "sciatica" when the rear seat of the thigh or "cruralgie" when the seat of pain in the front of the thigh. This justifies that the distance between the load which is the point of application of the load and the axis of the spine plays an important role in increasing stresses at the intervertebral discs.

V. CONCLUSION

In sum, we concluded the case of posterior loading 350mm lever arm with a load 200N posterior indicate normal maximum Von Mises stresses in four intervertebral discs (D1, D15, D16, D17) and are equal to (6,9797MPa, 4,4374MPa, 4,7858MPa, 2,7365MPa) these mentioned in \ "(Fig. 18) \", on the other hand \ "(Fig. 19) \" clearly shows the elastic strain is higher in the four intervertebral discs (D1, D15, D16, D17) that are equal (1.7347, 1.0586, 1.1463, 0.66065), which justifies that the distance between the load which is the point of application of the load and the axis of the spine plays a very important role in increasing the solitation of the latter.

VI. ACKNOWLEDGEMENTS

The authors extend their appreciation to the Director of Scientific Research at LaBPS for funding the work through the Biomechanics Research Group.

REFERENCES RÉFÉRENCES REFERENCIAS

1. Thomas, M. Contribution A L'analyse Biomécanique Et A L'évaluation Des Implants Rachidiens, L'école Nationale Supérieure D'arts Et Métiers Spécialité "Biomécanique", Paris, 2008.
2. Hernie Discale Lombaire, Service de Chirurgie orthopédique et Traumatologique, Hôpital Beaujon.
3. Robert Bohinski, MD. Herniated Lumbar Disc. Mayfield Clinic, university of cincinnati department of neurosurgery, cincinnati, Ohio, mayfield brain and spine, 1998-2016.
4. Dr. Kilcup. Herniated disk fixed without harmful, Addictive Drugs and Surgery, 20 October 2011.
5. Karine, L. Institut Français D'étiopathie (IFE) Paris, le 16 Septembre 2014.
6. Dr Kassab M. Centre Avicenne Médical, 2 Av Tahar Sfar, 2092, El Manar 2, Tunis, Tunisie.
7. White Iii AA, And Panjabi MM. Clinical Biomechanics Of The Spine. 1990.
8. Marcovschi Champain S. Corrélations Entre Les Paramètres Biomécaniques Du Rachis Et Les Indices Cliniques Pour L'analyse Quantitative Des Pathologies Du Rachis Lombaire Et De Leur Traitement Chirurgical, Enam, Paris. 2008.
9. Pr. Francois L. Biomécanique Et Ostéosynthèse Du Rachis Ensm-Lbm Conférences D'enseignement De La Sofcot. 1997.
10. Starmans FJ, Steen WH, Bosman F. A Three-Dimensional, Finite-Element Analysis Of Bone Around Dental Implants In An Edentulous Human Mandible. Arch Oral Biol. 1993; 38: 491– 6.
11. Ibarz E, Más Y, Mateo J, Lobo-Escolar A, Herrera A. And Gracia L. Instability Of The Lumbar Spine Due To Disc Degeneration. A Finite Element Simulation. Advances In Bioscience And Biotechnology. 2013; 4: 548-556.
12. Mingzhi S, Zhen Z, Ming L, Junwei Z, Chao D, Kai M and Shouyu W. Four Lateral Mass Screw Fixation Techniques In Lower Cervical Spine Following Laminectomy. A finite Element Analysis Study Of Stress Distribution.
13. Steven A, Rundell, MS, Jorge E, Isaza MD, Steven M, Kurtz Phd.) Biomechanical Evaluation Of A Spherical Lumbar Interbody Device At Varying Levels Of Subsidence. Exponent, inc, philadelphia, pa, sas journal. 2011; 5: 16-25.
14. G, Vijay K, PhD, M Ankit, BS, J, Jayant, BS, Faizan A, BS, K, Ali MS, Hoy R.W, MEng, and Fauth AR, PhD. Anatomic facet replacement system (AFRS) restoration of lumbar segment mechanics to intact. a finite element study and in vitro cadaver investigation. SAS Journal. 2007; 1: 46–54.
15. Holekamp S, MS Goel V, PhD K Hiroshi, MD H Janet MS and E Nabil MD. Optimal Intervertebral Sealant Properties for the Lumbar Spinal Disc. A Finite-Element Study. SAS Journal. Spring. 2007; 1: 68–73.
16. CAE, MD, Huang H, PhD, Vestgaarden Tov, PhD, Saigal S, PhD, Clabeaux DH, RN, and Pienkowski D, PhD. Stress Reduction in Adjacent Level Discs Via Dynamic Instrumentation. A Finite Element Analysis. SAS Journal. Spring. 2007; 1: 74–81.

17. López E, Elena I, Herrera A, Mateo J, Lobo-Escolar A, Puértolas S, Gracia L. Probability Of Osteoporotic Vertebral Fractures Assessment Based On DXA Measurements And Finite Element Simulation. *Advances in Bioscience and Biotechnology*. 2014; 5: 527-545.
18. Kiapour A, Kiapour AM, Kodigudla M, Hill GM, Mishra S and Goel VK. A Biomechanical Finite Element Study of Subsidence and Migration Tendencies in Stand-Alone Fusion Procedures. Comparison of an In Situ Expandable Device with a Rigid Device. *J Spine*. 2012; 1: 2165-7939.
19. Zheng SN, Yao QQ, Wang LM, Hu WH, Wei B, Xu Y, Zhang DG. Biomechanical Effects Of Semi Constrained Integrated Artificial Discs On Zygapophysial Joints Of Implanted Lumbar Segments. *Experimental and Therapeutic Medicine*. 2013; 6: 1423-1430.
20. Byun DH, Ah Shin D, Kim JM, Kim SH, Kim HI. Finite Element Analysis of the Biomechanical Effect of CoflexTM on the Lumbar Spine. laboratory investigation. *Korean J Spine*. 2012; 9 (3): 131-136.
21. Lan ChCh, Kuo ChS, Chen ChH, Hu HT. Finite element analysis of biomechanical behavior of whole thoraco-lumbar spine with ligamentous effect. *The Changhua Journal of Medicine*. 2013; 11: 26-41.
22. Natarajan RN and Andersson GBJ. Modeling the annular incision in a herniated lumbar intervertebral disc to study its effect on disc stability. *Comput Struct*. 1997; 64: 1291-7.
23. Pitzen T, Geisler FH, Matthis D, Storz HM, Pedersen K And Steudel WI. The influence of cancellous bone density on load sharing in human lumbar spine: a comparison between an intact and a surgically altered motion segment. *Eur Spine J*. 2001; 10: 23-9.
24. Polikeit A. Finite element analysis of the lumbar spine: Clinical application. Inaugural dissertation. University of Bern. 2002.
25. Denozi'Ere G. Numerical modeling of a ligamentous lumber motion segment, M.S. thesis, Department of Mechanical Engineering. Georgia Institute of Technology. Georgia. USA. 2004.
26. Gwanseob Shin. Viscoelastic responses of the lumbar spine during prolonged stooping. Ph.D. dissertation, NCSU, USA. 2005.
27. Sairyo K, Goel VK, Masuda A, Vishnubhotla S, Faizan A, Biyani A, Ebraheim N, Yonekura D, Murakami RI and Terai T. Three-dimensional finite element analysis of the pediatric lumbar spine. *Eur Spine J*. 2006; 15: 923-9.
28. Rohlmann A, Burra Nk, Zander T, Bergmann G. Comparison of the effects of bilateral posterior dynamic and rigid fixation devices on the loads in the lumbar spine. *Eur Spine J*. 2007; 16: 1223-31.
29. Wilke Hj, Neef P, Caimi M, Hoogland T, Claes Le. New intradiscal pressure measurements in vivo during daily activities. *Spine*. 1999; 24: 755-62.
30. Smit T, Odgaard A, Schneider E. Structure and function of vertebral trabecular bone. *Spine*. 1997; 22: 2823-33.
31. Sharma M, Langrana Na, Rodriguez J. Role of ligaments and facets in lumbar spinal stability. *Spine*. 1995; 20: 887-900.
32. Lee K, Teo E. Effects of laminectomy and facetectomy on the stability of the lumbar motion segment. *Med Eng Phys*. 2004; 26: 183-92.
33. Rohlmann A, Zander T, Schmidt H, Wilke Hj, Bergmann G. Analysis of the influence of disc degeneration on the mechanical behaviour of a lumbar motion segment using the finite element method. *J Biomech*. 2006; 39: 2484-90.
34. Ng Hw, Teo Ec. Nonlinear finite-element analysis of the lower cervical spine (C4– C6) under axial loading. *J Spine Disord*. 2001; 14: 201-10.
35. Ng HW, Teo ECh and Zhang QH. Influence Of Laminotomies And Laminectomies On Cervical Spine Biomechanics Under Combined Flexion-Extension. *Journal Of Applied Biomechanics*. 2004; 20: 243-259.
36. Gong Z MM, Chen Z MD, Feng Z MD, Cao Y MM, Jiang Ch MD, Jiang X MD. Finite Element Analysis of 3 Posterior Fixation Techniques in The Lumbar Spine. *Feature Article*. 2014; 37: E441- E448.
37. Kim HJ, Tak Kang K, Chang BS, Lee ChK, Kim JW, And Yeom JS. Biomechanical Analysis of Fusion Segment Rigidity Upon Stress at Both the Fusion and Adjacent Segments-A Comparison between Unilateral and Bilateral Pedicle Screw Fixation. *Yonsei Med J*. 2014; 55(5): 1386-1394.
38. Claire B-R, MASc, Pierre-Jean A, PhD, Rohan-Jean B, PhD, Yves G-R, MEng L F, PhD, Carl-Éric A-P. Finite Element Analysis of Sacroiliac Joint Fixation under Compression Loads. *International Journal of Spine Surgery*. 2016 ; 10.14444/3016.

This page is intentionally left blank