



GLOBAL JOURNAL OF RESEARCHES IN ENGINEERING: C
CHEMICAL ENGINEERING
Volume 21 Issue 1 Version 1.0 Year 2021
Type: Double Blind Peer Reviewed International Research Journal
Publisher: Global Journals
Online ISSN: 2249-4596 & Print ISSN: 0975-5861

Design and Economic Analysis of a Small Scale Formaldehyde Plant from Flared Gas

By Muesi Zornata Noble, Emmanuel O. Ehirim, Wordu Animia
& Jaja Zina

Rivers State University

Abstract- The Simulation of a 10,000 ton/yr capacity Formaldehyde plant from flared gases was performed using Aspen Hysys version 8.8, and the Hysys model of the plant was developed using data from literature. A material and energy balance for the various components of the plant was performed manually and with Hysys for comparison. The design/equipment sizing, Mechanical design, costing and economic evaluation, process control of the functional parameters of the various equipments and finally the full Hysys process flow diagram of the model was performed. The Formaldehyde reactors was simulated to study the effect of process functional parameters such as reactor dimensions, temperature, pressure, The effect of reactor size and number on Formaldehyde output was studied by simulating the plant with a compressor, mixer, conversion reactor, cooler, CSTR, heat exchanger, and storage tank.

Keywords: design, height, diameter, volume, composition, formaldehyde.

GJRE-C Classification: FOR Code: 090499



Strictly as per the compliance and regulations of:



Design and Economic Analysis of a Small Scale Formaldehyde Plant from Flared Gas

Muesi Zornata Noble ^a, Emmanuel O. Ehirim ^a, Wordu Animia ^a & Jaja Zina ^a

Abstract- The Simulation of a 10,000 ton/yr capacity Formaldehyde plant from flared gases was performed using Aspen Hysys version 8.8, and the Hysys model of the plant was developed using data from literature. A material and energy balance for the various components of the plant was performed manually and with Hysys for comparison. The design/equipment sizing, Mechanical design, costing and economic evaluation, process control of the functional parameters of the various equipments and finally the full Hysys process flow diagram of the model was performed. The Formaldehyde reactors was simulated to study the effect of process functional parameters such as reactor dimensions, temperature, pressure, The effect of reactor size and number on Formaldehyde output was studied by simulating the plant with a compressor, mixer, conversion reactor, cooler, CSTR, heat exchanger, and storage tank. The results of the material and energy balance of the various components of the plant performed manually and with Hysys showed a maximum deviation of 0.8%. The design and sizing results of various functional parameters of the reactor in terms of Volume, Diameter, Height, Spacetime, SpaceVelocity, and Volume flowrate respectively were: 45m³, 3.368m, 5.052m, 1.8892hr, 0.5293/hr, 23.82m³/hr. The design and sizing results of the heat exchanger in terms of Heat load, Heat transfer area, log mean temperature difference (LMTD), Overall heat transfer coefficient, tube length, number of tubes, pitch were: 69.94KW, 60.32m², 49.79°C, 23.29W/m²K, 4.83m, 160, 50mm. The effect of reactor size and number showed that At 90% conversion the following output results were obtained for formaldehyde product in terms of mass flow rate, molar flow rate, composition (mole fraction), and yield: 479.53kg/hr, 0.79kgmole/hr, 0.0541, and 0.8988 respectively.

Keywords: design, height, diameter, volume, composition, formaldehyde.

I. INTRODUCTION

Formaldehyde is produced in industrial scale from methanol. It uses atmospheric pressure to perform the production. There are steps in formaldehyde production. The first step involves the liquid methanol which vapourized into an air stream while steam was added to the resulting gaseous mixture. Also, the other step involves the gaseous mixture lead over a catalyst bed. The methanol was finally converted to formaldehyde through partial dehydrogenation and partial oxidation. (Alfaree & Adnan, 2016).

Author ^a or ^{co} : Department of Chemical/Petrochemical Engineering, Rivers State University, Nkpou-Oroworukwo, Port Harcourt, Rivers State, Nigeria. e-mail: zmuesi@gmail.com

Besides, the report by Welch shows that 10 million of formaldehyde was produced annually and met the demand of the industries as at then, but as population increases, the demand of formaldehyde was increased and the production rate was not able to met industrial scale based on its wide application. (Alzein & Nath, 2018), the process industry would need more of formaldehyde production rate to met world production annually. This increase in population that occurs result to more production of formaldehyde at a later year. In the 2012, the production of formaldehyde amount to 32.5 million tons per year. According to (Sukunya *et al.*, 2014), this increase in demand was due to the applications of formaldehyde in chemical synthesis such as resin products. These resins are used for polywood production. Also, formaldehyde solution can destroy bacteria and fungi.

However, the 32.5 million tons per year was a report as at 2012, but we are now in 2019. This has resulted to increase in population of the world as well as the demand for formaldehyde base on its usage in process industries. (Cameroon *et al.*, 2019).

Today, many researchers are looking for new areas in which formaldehyde can be applied, technology has increase and new methods are been discovered. (Chauvel & Lefebvre, 2015). The production based on report cannot met the demand today and so more researchers are to go into designing of units operations for the production of formaldehyde to met world demand which as a results of the current population density. Also, more processes for the production of formaldehyde can be added to the existing two processes and hence these calls for more future research to be carried out with a view of which production process gives the most yield with the least cost of production. (Choudhary *et al.*, 2017).

The study of formaldehyde plant calls for new design of reactor that would produce formaldehyde in excess in other to take care of the world's population that requires the uses and applications of formaldehyde. The production of formaldehyde using the silver contact process amounts to 80% of total formaldehyde process. The type of reactor determines the desired productions which depend on feed quality (Antonio *et al.*, 2010; Geoffrey *et al.*, 2004) and the reactor temperature (Geoffrey *et al.*, 2004). The work focus on the type of reactor design would produce formaldehyde in excess as to met the current demand of society today. This is

base on the wide application of formaldehyde. The study require the development of design parameters or sizes of continuous stirred tank, plug flow and batch reactor for the two routes used in producing formaldehyde. The reactor types would be tested in its design to compute and simulate to ascertain which reactor type would be suitable to produce formaldehyde in the required quantity to supply to the needs of the process industry for various applications.

Besides, the various reactor models would be tested with the reaction mechanisms and kinetics for simulations of variables which would be used to ascertain the reactor that best give the highest production. The products from the reactors are fed into absorber to form formaldehyde 37% by mass called formalin or more (Andre *et al.*, 2002).

However, the formalin formed at room temperature was not stable and formed paraformaldehyde. The paraformaldehyde formed was high concentration of formaldehyde. But formalin has methanol of 1.14% by mass for more stability in solution and its temperature was more than 313k (Geoffrey *et al.*, 2004), the study focuses on the design of reactor types for the production of formaldehyde. This formaldehyde has the formula HCHO and the first series of aliphatic aldehyde which was discovered in 1859. The production of formaldehyde which started during the twentieth century had continued even till date. The study becomes more imperative for industries, engineers and producers who wants to exploits the opportunity to design reactor types for the production of formaldehyde.

Also, the study calls for new design of reactor that would produce formaldehyde in excess in other to take care of the world's population that requires the uses and applications of formaldehyde. (Ghanta *et al.*, 2017), the production of formaldehyde using the silver contact process amounts to 80% of total formaldehyde process. The type of reactor determines the desired product which depend on feed quality (Antonio *et al.*, 2010; Geoffrey *et al.*, 2004), Their work focus on the type of reactor design would produce formaldehyde in excess as to met the current demand of society today. This is base on the wide application of formaldehyde. The study require the development of design parameters or sizes of continuous stirred tank, plug flow and batch reactor for the two routes used in producing formaldehyde. (Ghaza & Mayourian, 2014),The reactor types would be tested in its design to compute and simulate to ascertain which reactor type would be suitable to produce formaldehyde in the required quantity to supply to the needs of the process industry for various applications.

(Gujarathi *et al.*, 2020), the various reactor models would be tested with the reaction mechanisms and kinetics for simulations of variables which would be used to ascertain the reactor that best give the highest production. The products from the reactors are fed into

absorber to form formaldehyde 37% by mass called formalin or more (Andre *et al.*, 2002). However, the formalin formed at room temperature was not stable and formed paraformaldehyde. The paraformaldehyde formed was high concentration of formaldehyde.

But formalin has methanol of 1-14% by mass for more stability in solution and its temperature was more than 313 k (Geoffrey *et al.*, 2009). The study focuses on the design of reactor types for the production of formaldehyde. This formaldehyde has the formula HCHO and the first series of aliphatic aldehyde which was discovered in 1859. The production of formaldehyde which started during the twentieth century had continued even till date. The study becomes more imperative for industries, engineers and producers who wants to exploits the opportunity to design reactor types for the production of formaldehyde.

The production and optimization of formaldehyde can include the streams for air, methanol and water in a suitable composition in a plug flow reactor under certain conditions of temperatures and pressure (Andreasen *et al.*, 2003). The purpose of using a plug flow reactor is to get desired product which can be optimized to get best yield of formaldehyde (Antonio *et al.*, 2010; Geoffrey *et al.*, 2004).

(Lauks *et al.*, 2015), on the other hand, when the production of formaldehyde involves the use of silver catalyst, the operation is carried out adiabatically by lagging the system which helps to obtain a selectivity of 90%. (Marton *et al.*, 2017), the life of the catalyst is short depending on the impurities in the methanol and the gases at exist that contain considerable amount of hydrogen and water. However, the silver being a metal would have low catalytic activity for the decomposition of methanol even at a very high temperature. (Mazanec *et al.*, 2019), the chemisorption of the monoatomic oxygen in the metal brings its activation.

(Meisong, 2015), thermal decomposition of formaldehyde depends on the gas stream, the gas stream is cooled when it passes through the catalyst. The formaldehyde produced is then absorbed in an absorber by water to get pure formaldehyde. Since the gaseous form of formaldehyde is unstable, it is better absorbed in water. (Mohamad, 2016), the products of reaction contains the formaldehyde diluted in water other gases which mainly contains nitrogen. Finally, the commercial and final product is obtain from the absorber of about 55% weight of formaldehyde in water or formalin.

(Mohsenzadeh, 2019), the design and optimization of the reactor for the production of formaldehyde which uses two different routes and each would be considered during the design of the reactor because we want to know which of the route would be best in the production of formaldehyde. Also, the reactors would be batch, continuous stirred tank and plug flow reactor. Each reactor would follow both routes

required for the production of formaldehyde and the optimization of each routes of production and in each of the reactor types. Finally, the physical properties would be presented in tabular form below (Reuss *et al.*, 2003). Jaja *et al.* (2020), Methane is a major component of flared gas as well as natural gas and its composition varies from 70 to 90% in both cases.

II. MATERIALS AND METHODS

a) Materials

The Materials used in this Research includes:

- i. Plant data of flared gas composition obtained from the Port Harcourt Refining Company
- ii. Aspen Hysys software version 8.8
- iii. Matlab software
- iv. Microsoft excel
- v. Computer

b) Methods

The methods that will be adopted in this Research includes:

- (a) Material Balance
- (b) Energy Balance
- (c) Equipment Sizing

$$[Material\ out] = [Material\ in] + [Generation] - [Consumption] - [Accumulation] \quad (1)$$

For steady state process the accumulation term will be zero except in nuclear process, mass is neither generated nor consumed; but if a chemical reaction take place a particular chemical species may be formed or consumed in the process. If there is no chemical reaction the steady state balance reduces to:

$$\left[\frac{Rate\ of\ Outflow}{of\ Energy} \right] = \left[\frac{Rate\ of\ Inflow}{of\ Energy} \right] + \left[\frac{Rate\ of\ Generation}{of\ Energy} \right] - \left[\frac{Rate\ of\ Consumption}{of\ Energy} \right] - \left[\frac{Rate\ of\ Accumulation}{of\ Energy} \right] \quad (3)$$

If no chemical reaction occurs

$$\left[\frac{Rate\ of\ Consumption}{of\ Energy} \right] = \left[\frac{Rate\ of\ Generation}{of\ Energy} \right] = 0 \quad (4)$$

Equation (3) becomes

$$\left[\frac{Rate\ of\ Outflow}{of\ Energy} \right] = \left[\frac{Rate\ of\ Inflow}{of\ Energy} \right] - \left[\frac{Rate\ of\ Accumulation}{of\ Energy} \right] \quad (5)$$

If the system is a steady state process

$$\left[\frac{Rate\ of\ Accumulation}{of\ Energy} \right] = 0 \quad (6)$$

Equation (5) becomes

$$\left[\frac{Rate\ of\ Inflow}{of\ Energy} \right] = \left[\frac{Rate\ of\ Outflow}{of\ Energy} \right] \quad (7)$$

Energy flow for each stream shall be computed in terms of Heat Flow using the formula

$$\dot{Q} = \dot{m}C_{p,mean} (T - T_{ref}) \quad (8)$$

Where Q = Heat flow rate in kJ/hr

\dot{m} = mass flow rate in kg/hr

(d) Mechanical Design

(e) Costing

(a) Material Balance

Material balance are the basics of process design. A material balance taken over the complete process will determine the quantities of raw materials required and products produced. Balances over individual process unit set the process stream flows and compositions. A good understanding of material balance calculations is essential in process design.

Material balances are also useful tools for the study of plant operation and trouble shooting. They can be used to check performance against design; to extend the often limited data from the plant instrumentation; to check instrument calibrations and to locate source of material loss.

The loss of mass associated with the production of energy is significant only in nuclear reactions. Energy and matter are always considered to be separately conserved in chemical reactions.

The general conservation equation for any process can be written as:

$$[Materials\ in] = [Materials\ Out] \quad (2)$$

(b) Energy Balance

A general energy balance equation can be written as:



$$C_{p_{mean}} = \text{Mean Specific Heat Capacity in } \text{KJ/kg } ^\circ\text{C}$$

T = Temperature of the stream in °C
 T_{ref} = Reference Temperature of stream
sometimes assumed to be zero

(c) Equipment Sizing

The different categories of equipment to be sized in this project includes:

- i. Conversion Rector Unit
- ii. Continuous Stirred Tank Reactor (CSTR) Unit
- iii. Heat Exchange Unit
- iv. Storage Tank Unit

(d) Mechanical Design

A vessel must be designed to withstand the maximum pressure to which it is likely to be subjected in operation. For vessels under internal pressure, the design pressure is normally taken as the pressure at which the relief device is set. This will normally be 5 to 10 per cent above the normal working pressure, to avoid spurious operation during minor process upsets. When deciding the design pressure, the hydrostatic pressure in the base of the column should be added to the operating pressure if significant.

Vessels subject to external pressure should be designed to resist the maximum differential pressure that is likely to occur in service. Vessels likely to be subjected to vacuum should be designed for a full

negative pressure of 1 bar unless fitted with an effective and reliable vacuum breaker.

(e) Cost Estimation and Economic Evaluation

Economic evaluation is very important for the proposed plant. We have to be able to estimate and decide between either native design and for project evaluation. Chemical plants are built to make profit and estimate of the investment is required and the cost of production are needed before the profitability for a project is the sum of the fixed and working capital.

Fixed capital is the total cost of the plant ready to start up. It is the cost paid to the contractors. **Working capital** is the additional investment needed, over and above the fixed capital to start up the plant and operate it to the point when income is earned. Most of the working capital is recovered from at the end of the project. The full detail of the costing is given in the appendix.

III. DESIGN SIMULATION (HYSYS)

This section represents a process simulation of plant design for the production of Formaldehyde from flared gas. The simulation covers the following equipments/units:

U001	-	Compression unit
U002	-	Mixing unit
U003	-	Conversion Reactor unit
U004	-	Cooling unit
U005	-	CSTR unit
U006	-	Heat Exchanger unit
U007	-	Storage tank unit
S ₁ (Stream 1)	-	Flared Gas
S ₂ (Stream 2)	-	Compressed Flared Gas
S ₃ (Stream 3)	-	Air
S ₄ (Stream 4)	-	Mixed Product
S ₅ (Stream 5)	-	Vapour product
S ₆ (Stream 6)	-	Cooled Vapour
S ₇ (Stream 7)	-	Formaldehyde Liquid
S ₈ (Stream 8)	-	Vapour Out
S ₉ (Stream 9)	-	Formaldehyde Liquid Out
S ₁₀ (Stream 10)	-	Hot Water Inlet
S ₁₁ (Stream 11)	-	Cooled Water Outlet
S ₁₂ (Stream 12)	-	Tank Product

Figure 1 shows the full PFD of the Hysys design Simulation Where formaldehyde from flared gas using the reaction between absorbed methane gas from flared gas and oxygen. The procedure begins with compressing of flared gasses using a compressor. The component of interest being methane is being compressed and mixed with air stream inside a mixer and then sent to a conversion reactor where reaction of

methane and oxygen occurs to Formaldehyde, Carbon [iv] oxide and water as products. The overhead products from the conversion reactor is being cooled and sent to a Continuous Stirred Tank Reactor [CSTR] for further reaction and more yield of the formaldehyde.

The product from the CSTR is being sent to the heat exchanger for further heating to the desired temperature and subsequently sent to the storage tank

for storage. The process was able to convert about 90% of methane and the yield of Formaldehyde is up to 45% making the process very economical to set up a plant for the production process using flared gas and trapping methane as base component of reaction. This is a new innovation in the technology of the production of formaldehyde and a scale up of the plant should be executed in the future.

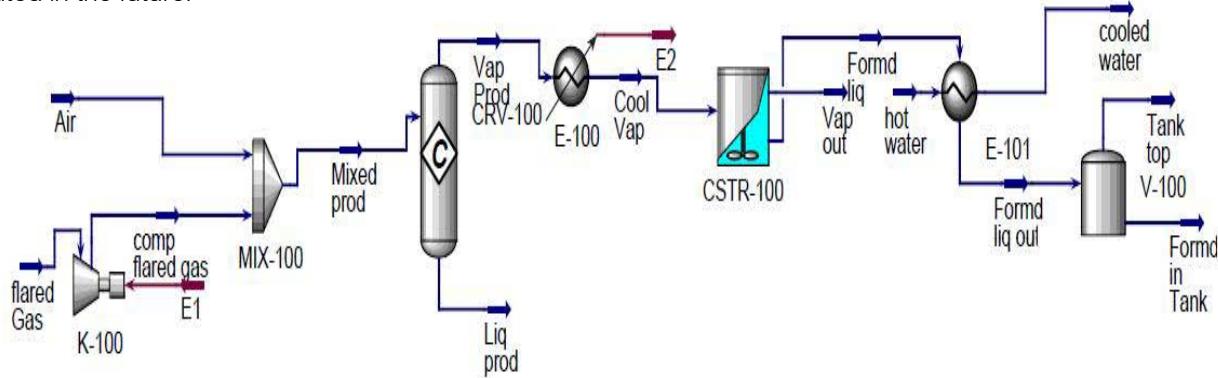


Figure 1: Hysys Simulation PFD

IV. RESULTS AND DISCUSSION

a) Material Balance Results

The following results of material balance with manual calculation compared with Hysys simulation is presented in tables below for each unit.

Table 4.1: Comparison of Material Balance Result of Hysys Simulation with Manual Calculation for Compression Unit

Streams	Manual calc.	Hysys Simulation	% Deviation
Flared Gas (S_1)			
Mass Flow (kg/hr)	1.23×10^4	1.20×10^4	2.5
Molar Flow (kgmole/hr)	600.50	600.10	0.7
Compressed Flared Gas (S_2)			
Mass Flow (kg/hr)	1.23×10^4	1.20×10^4	2.5
Molar Flow (kgmole/hr)	600.50	600.10	0.7

In Table 4.1 above the mass flow rate of Flared Gas Stream (S_1) for Hysys simulation is 1.2×10^4 kg/hr while that for the manual calculation is 1.23×10^4 kg/hr with a deviation of 2.5%. the molar flow rate for Hysys simulation was found to be 600.10 kgmole/hr while that of manual calculation is 600.50 kgmole/hr with a deviation of 0.7% we also observe that since this unit is

a single input, single output stream and applying the principles of conservation of mass, input mass equals output mass, hence the output been Compressed Flared Gas has the same mass and molar flow rates of the input stream which is Flared Gas as well as the same deviation.

Table 4.2: Comparison of Material Balance Result of Hysys Simulation with Manual Calculation for Mixing Unit

Streams	Manual calc.	Hysys Simulation	% Deviation
Air (S_3)			
Mass Flow (kg/hr)	1.1×10^4	1×10^4	10
Molar Flow (kgmole/hr)	346.60	346.30	0.9
Flared Gas (S_2)			
Mass Flow (kg/hr)	1.23×10^4	1.20×10^4	2.5
Molar Flow (kgmole/hr)	600.50	600.10	0.7
Mixed Product (S_4)			
Mass Flow (kg/hr)	2.10×10^4	2.20×10^4	4.5
Molar Flow (kgmole/hr)	947.40	947.10	3.0

In Table 4.2 above the mass flow rate of the Air Stream is 1×10^4 kg/hr for Hysys simulation while for manual calculation is found to be 1.1×10^4 kg/hr having a deviation of 10%. The molar flow rate for the Hysys simulation is 343.3 kgmole/hr while that of the manual calculation is 343.3 kgmole/hr having a deviation of 0.9%. This Flared Gas stream has been stated in the discussion of Table 4.1, however we are to note that Air stream (S_3) and Flared Gas Stream (S_2) are both input streams respectively which are mixed inside a mixer to produce an outlet stream Mixed Product (S_4) having a

mass flow rate of 2.20×10^4 kg/hr for Hysys simulation and 2.10×10^4 kg/hr for manual calculation with a 4.5%. the molar flow rate of this stream is 947.10 kgmole/hr for Hysys simulation and 947.40 for manual calculation with a deviation of 3%. Applying the principles of conservation of mass to this unit shows that if mass flow rates of the inlet streams are added together the results equals the mass flow rate of the outlet stream which makes our results to be valid for inflow of mass is equal to outflow of mass.

Table 4.3: Comparison of Material Balance Result of Hysys Simulation with Manual Calculation for Conversion Reactor Unit

Streams	Manual calc.	Hysys Simulation	% Deviation
Mixed Product (S_4)			
Mass Flow (kg/hr)	2.10×10^4	2.20×10^4	4.5
Molar Flow (kgmole/hr)	947.40	947.10	3.0
Vapour Product (S_5)			
Mass Flow (kg/hr)	2.10×10^4	2.20×10^4	4.5
Molar Flow (kgmole/hr)	947.40	947.10	3.0
Reaction Extent		24.25	
Fractional Conversion		0.1102	

In Table 4.3 the mass flow rate of the Mixed Product Stream (S_4) for Hysys simulation is 2.20×10^4 kg/hr while the manual calculation is 2.10×10^4 kg/hr with deviation of 4.5%. The molar flow rate of the Mixed Product Stream (S_4) is 947.10 kgmole/hr for Hysys simulation and 947.40 kgmole/hr for manual calculation with a deviation of 3.0%. We also observe that since this unit is a single input, single Output Stream and applying

the principles of conversation of mass, input mass equals output mass, hence the output been Vapour Product (S_5) has same mass and molar flow rates of the Input Stream as well as the same % Deviation. Also the Extent of Reaction for this unit for Hysys simulation is 24.27. The fractional conversion for Hysys simulation is 0.1102 while for manual calculation is 0.1105.

Table 4.4: Comparison of Material Balance Result of Hysys Simulation with Manual Calculation for Cooling Unit

Streams	Manual calc.	Hysys Simulation	% Deviation
Vapour Product (S_5)			
Mass Flow (kg/hr)	2.10×10^4	2.20×10^4	4.5
Molar Flow (kgmole/hr)	947.40	947.10	3.0
Cooled Vapour (S_6)			
Mass Flow (kg/hr)	2.10×10^4	2.20×10^4	4.5
Molar Flow (kgmole/hr)	947.40	947.10	3.0

In Table 4.4 the mass flow rate of the input stream Vapour Product has been stated in the discussion of Table 4.3, this unit contains a single input, single output streams. Hence, the same mass and molar flow rate of the Vapour Product Stream (S_5) is the

same for the cooled Vapour Stream (S_6) which is 2.2×10^4 kg/hr for Hysys simulation and 2.10×10^4 kg/hr for manual calculation. Also the molar flow is 947.10 for Hysys simulation and 947.40 for manual calculation.

Table 4.5: Comparison of Material Balance Result of Hysys Simulation with Manual Calculation for CSTR Unit

Streams	Manual calc.	Hysys Simulation	% Deviation
Cooled Vapour (S_6)			
Mass Flow (kg/hr)	2.10×10^4	2.20×10^4	4.5
Molar Flow (kgmole/hr)	947.40	947.10	3.0
Formaldehyde Liquid (S_7)			
Mass Flow (kg/hr)	888.5	888.7	0.2
Molar Flow (kgmole/hr)	45.04	45.03	0.3

Vapour Out (S_8)			
Mass Flow (kg/hr)	2.12×10^4	2.111×10^4	0.4
Molar Flow (kgmole/hr)	903.2	902.1	0.1

In Table 4.5 the mass flow rate of cooled vapour stream (S_8) is 2.20×10^4 kg/hr for Hysys simulation and 2.10×10^4 kg/hr for manual calculation with a deviation of 4.5%. The molar flow rate for Hysys simulation is 947.10 kgmole/hr and for manual calculation 947.40 kgmole/hr with a deviation of 3.0%. The mass flow rate of Formaldehyde Liquid stream for Hysys simulation and manual calculation are 888.7 kg/hr and 888.5 kg/hr

respectively having a deviation of 0.2%. While the molar flow rate are 45.03 kgmole/hr and 45.04 kgmole/hr having a deviation of 0.3%. The mass and molar flow rate of the Vapour Out Stream for Hysys simulation and manual calculation are 2.111×10^4 kg/hr and 2.12×10^4 kg/hr having a deviation of 0.4% while molar flow rate are 902.1 kgmole/hr and 903.12 kgmole/hr having deviation of 0.1%.

Table 4.6: Comparison of Material Balance Result of Hysys Simulation with Manual Calculation for Heat Exchanger Unit

Streams	Manual calc.	Hysys Simulation	% Deviation
Formaldehyde Liquid (S_7)			
Mass Flow (kg/hr)	888.5	888.7	0.2
Molar Flow (kgmole/hr)	45.04	45.03	0.3
Formaldehyde Liquid Out (S_9)			
Mass Flow (kg/hr)	888.5	888.7	0.2
Molar Flow (kgmole/hr)	45.04	45.03	0.3
Hot Water Inlet (S_{10})			
Mass Flow (kg/hr)	900.20	900	0.2
Molar Flow (kgmole/hr)	50.00	49.96	0.1
Cooled Water Outlet (S_{11})			
Mass Flow (kg/hr)	900.20	900	0.2
Molar Flow (kgmole/hr)	50.00	49.96	0.1

In Table 4.6 Formaldehyde Liquid Stream has the same mass and molar flow rate as Formaldehyde Liquid Out. While Hot Water Inlet Stream has the same mass and molar flow rate as Cooled Water Out. This is expected for the design of the Heat Exchanger.

b) Energy Balance Results

The following results of energy balance with manual calculation compared with Hysys simulation is presented in tables below for each unit.

Table 4.7: Comparison of Energy Balance Result of Hysys Simulation with Manual Calculation for Compression Unit

Streams	Manual calc.	Hysys Simulation	% Deviation
Flared Gas (S_1)			
Temperature (°C)	25	25	0.0
Pressure (kpa)	101.3	101.3	0.0
Heat Flow (kJ/hr)	-4.682e7	-4.686e7	4.7
(E1)			
Temperature (°C)	-	-	
Pressure (kpa)	-	-	
Heat Flow (kJ/hr)	3.421e5	3.427e5	1.4
Compressed Gas (S_2)			
Temperature (°C)	38.84	38.84	0.0
Pressure (kpa)	120	120	0.0
Heat Flow (kJ/hr)	-4.6479e7	-4.6478e7	1.3

In Table 4.7 above the heat flow of Stream (S_1) and Stream (E1) when added equals the heat flow of stream (S_2) and this is in line with the principles of

Conservation of Energy for a steady state process with chemical reaction occurring.

Table 4.8: Comparison of Energy Balance Result of Hysys Simulation with Manual Calculation for Mixing Unit

Streams	Manual calc.	Hysys Simulation	% Deviation
Compressed Gas (S_2)			
Temperature (°C)	38.84	38.84	0.0



Pressure (kpa)	120	120	0.0
Heat Flow (kJ/hr)	-4.6478e7	-4.6474e7	5.4
Air (S_1)			
Temperature (°C)	25	25	0.0
Pressure (kpa)	101.3	101.3	0.0
Heat Flow (kJ/hr)	0	0	0.0
Mixed Product (S_4)			
Temperature (°C)	34.84	34.84	0.0
Pressure (kpa)	101.3	101.3	0.0
Heat Flow (kJ/hr)	-4.6478e7	-4.6474e7	5.4

In Table 4.8 it is observed that the heat flow of the air stream is zero because the temperature of this stream equals its reference temperature hence no heat

flow. Also the heat flow of Compressed Gas Stream (S_2) and Mixed Stream (S_4) are equal.

Table 4.9: Comparison of Energy Balance Result of Hysys Simulation with Manual Calculation for Conversion Reactor Unit

Streams	Manual calc.	Hysys Simulation	% Deviation
Mixed Product (S_4)			
Temperature (°C)	34.84	34.84	0.0
Pressure (kpa)	101.3	101.3	0.0
Heat Flow (kJ/hr)	-4.6478e7	-4.6474e7	5.4
Vapour Product (S_5)			
Temperature (°C)	34.84	34.84	0.0
Pressure (kpa)	101.3	101.3	0.0
Heat Flow (kJ/hr)	-4.6478e7	-4.6474e7	5.4

In Table 4.9 above the flow of Mixed Stream (S_4) and Vapour Product Stream (S_5) are equal since it is a

Single Input, Single Output Stream and also in with the principles of conservation of energy.

Table 4.10: Comparison of Energy Balance Result of Hysys Simulation with Manual Calculation for Cooling Unit

Streams	Manual calc.	Hysys Simulation	% Deviation
Vapour Product (S_5)			
Temperature (°C)	34.84	34.84	0.0
Pressure (kpa)	101.3	101.3	0.0
Heat Flow (kJ/hr)	-4.6478e7	-4.6478e7	5.4
(E_2)			
Temperature (°C)	-	-	
Pressure (kpa)	-	-	
Heat Flow (kJ/hr)	2.636e7	2.636e7	0.0
Cooled Vapour (S_6)			
Temperature (°C)	800	800	0.0
Pressure (kpa)	101.3	101.3	0.0
Heat Flow (kJ/hr)	-7.283e7	-7.285e7	2.4

In table 4.10 the sum of the Heat Flow of Stream E_2 and cooled Vapour Stream equals that of Vapour

Product Stream (S_5) which is line with the principles of conservation of energy.

Table 4.11: Comparison of Energy Balance Result of Hysys Simulation with Manual Calculation for CSTR Unit

Streams	Manual calc.	Hysys Simulation	% Deviation
Cooled Vapour (S_6)			
Temperature (°C)	800	800	0.0
Pressure (kpa)	101.3	101.3	0.0
Heat Flow (kJ/hr)	-7.283e7	-7.285e7	2.4
Formaldehyde Liquid (S_7)			

Temperature (°C)	80	80	0.0
Pressure (kpa)	101.3	101.3	0.0
Heat Flow (kJ/hr)	-1.169e7	-1.167e7	3.0
Vapour Out (S ₈)			
Temperature (°C)	800	800	0.0
Pressure (kpa)	101.3	101.3	0.0
Heat Flow (kJ/hr)	-6.114e7	-6.116e7	12.5

In Table 4.11 the sum of the heat flow Formaldehyde Liquid Stream (S₇) and Hot Water Inlet Stream (S₁₀) equals to the sum of the heat flow of Formaldehyde Liquid Out Stream (S₉) and cooled Water Stream (S₁₁) which is in line with the principles of

conservation of energy which states that inflow of energy is equal to outflow of energy provided that the system is a steady state process and no chemical reaction occurs.

Table 4.12: Comparison of Energy Balance Result of Hysys Simulation with Manual Calculation for Heat Exchanger Unit

Streams	Manual calc.	Hysys Simulation	% Deviation
Formaldehyde Liquid (S ₇)			
Temperature (°C)	80	80	0.0
Pressure (kpa)	101.3	101.3	0.0
Heat Flow (kJ/hr)	-1.169e7	-1.167e7	3.0
Formaldehyde Liquid Out (S ₉)			
Temperature (°C)	120	120	0.0
Pressure (kpa)	101.3	101.3	0.0
Heat Flow (kJ/hr)	-1.154e7	-1.156e7	3.6
Hot Water Inlet (S ₁₀)			
Temperature (°C)	200	200	0.0
Pressure (kpa)	101.3	101.3	0.0
Heat Flow (kJ/hr)	-1.160e7	-1.162e7	3.2
Cooled Water Outlet (S ₁₁)			
Temperature (°C)	195	195	0.0
Pressure (kpa)	101.3	101.3	0.0
Heat Flow (kJ/hr)	-1.175e7	-1.174e7	1.4

In Table 4.12 the design parameters such as Column Height, Column Diameter, Cross-sectional Area, Volume, Space time, Space Velocity, Thickness and Corrosion Allowance was compared with Hysys simulation and Manual calculation and the maximum deviation was found to be 3.2%.

b) Design /Sizing Results

The equipment design and sizing of each equipment of the plant is presented in the table below, for manual calculation compared to Hysys Simulation.

Table 4.13: Comparison of Sizing/Design Results of Hysys Simulation with Manual Calculations for Conversion Reactor Unit

Design/Sizing Item	Hysys Simulation	Manual Calculation	% Deviation
Flow Type			
Materials of Construction	Stainless steel	Stainless steel	
Column Height	3.86	3.84	2.4
Column Diameter	2.57	2.54	5.3
Cross Sectional Area	5.18	5.17	5.6
Volume	20	21	4.8
Space Time	0.43	0.42	2.3
Space Velocity	2.32	2.34	6.3
Thickness	18.63	18.65	3.1
Corrosion allowance	2.00	2.00	0.00

In Table 4.13 the design parameters such as Column Height, Column Diameter, Cross-sectional Area, Volume, Space time, Space Velocity, Thickness and Corrosion Allowance was compared with Hysys

simulation and Manual calculation and the maximum deviation was found to be 6.3%.

Table 4.14: Comparison of Sizing/Design Results of Hysys Simulation with Manual Calculations for CSTR Unit

Design/Sizing Item	Hysys Simulation	Manual Calculation	% Deviation
Flow Type			
Materials of Construction	Stainless steel	Stainless steel	
Column Height (m)	5.54	5.56	0.36
Column Diameter(m)	3.72	3.71	1.40
Cross Sectional Area(m ²)	10.80	10.79	1.30
Volume(m ³)	60.02	60.00	3.30
Space Time(hr)	0.74	0.75	1.33
Space Velocity(hr ⁻¹)	1.35	1.33	6.06
Thickness(mm)	21.60	21.59	1.67
Corrosion allowance(mm)	2.00	2.00	0.00

In Table 4.14 the design parameters such as Column Height, Column Diameter, Cross-sectional Area, Volume, Space time, Space Velocity, Thickness and Corrosion allowance was compared with Hysys simulation and Manual calculation and the maximum deviation was found to be 6.06%.

Table 4.15: Comparison of Sizing/Design Results of Hysys Simulation with Manual Calculations for Heat Exchanger Unit

Design/Sizing Item	Hysys Simulation	Manual Calculation	% Deviation
Equipment Name	Shell and tube heat exchanger	Shell and tube heat exchanger	
Objective.	Cooling the reactor effluent	Cooling the reactor effluent	
Equipment Number	U-007	U-007	
Designer			
Type	MUESI NOBLE PG.2017/02618 Split ring floating head (two shell four tubes)	MUESI NOBLE PG.2017/02618 Split ring floating head (two shell four tubes)	
Utility	Brackish Water	Brackish Water	
Insulation	Foam Glass	Foam Glass	
Heat load Q (kw)	945	947	0.0
Heat transfer Area (m ²)	53.4	53.5	0.2
LMTD (°C)	32	32.1	0.2
U (W/m ² K)	640	640.3	0.1
Inlet temperature (°C)	80	80	0.0
Shell Diameter (mm)	476	476	0.0
Shell coefficient W/m ² C	1516	1516.4	0.2
Outlet temperature (°C)	40	40	0.0
Baffle spacing (25% cut)	95.2	95.2	0.0
Shell material	Carbon steel	Carbon steel	
Inlet temperature (°C)	25	25	0.0
Tube Diameter (mm od/id)	20/16	20/16	0.0
Tube length (m)	4.83	4.83	0.0
Pitch type	Triangular	Triangular	
Outlet temperature (°C)	40	40	0.0
Number of Tubes	172	172.2	0.0
Tube material	Carbon alloy	Carbon alloy	
Pitch	25mm	25mm	0.0

In Table 4.15 Heat Exchanger Design Parameter was compared between Hysys simulation and manual calculation and the maximum deviation was found to be 0.2%

V. SENSITIVITY ANALYSIS

The functional parameters such as length of Reactor, Diameter, Space time, Space velocity were studied to see how they change with conversion and are presented in figures – to

a) Length of Reactor with Conversion

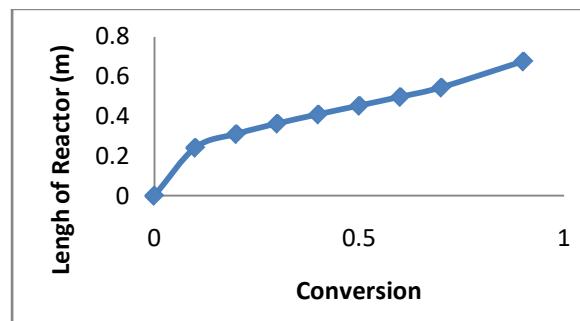


Figure 1: Profile Reactor versus Conversion

Figure 1 demonstrates the profile variation of length of the reactor varying with conversion. The results in the profile gives an increase of the length of reactors value with conversion increase. The length of reactor values increased from 0 m to 0.76m due to increase in conversion from 0 to 0.9. the increase in length resulted to increase in volume of the reactor and decrease in the rate of reaction values. The volume of the reactor is a function of length and rate of reaction.

b) *Diameter of Reactor with Conversion*

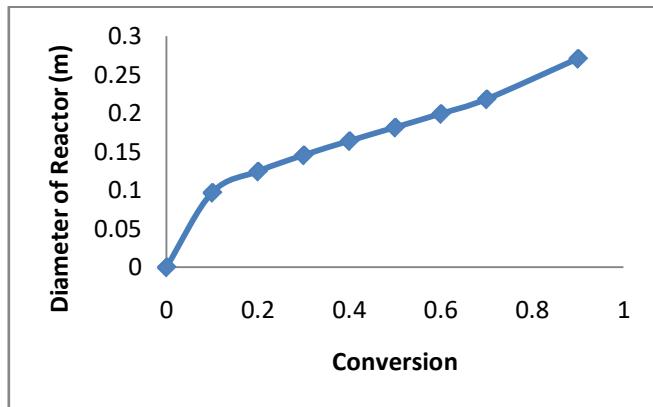


Figure 2: Plot of Diameter of Reactor versus Conversion

Similarly, figure 2 demonstrates the variation of the diameter the variation of the diameter of the reactor for the production of formaldehyde with conversion. The relationship is such that the length increases with increase in conversion and results to values such that when $D=0$, $X_A=0$ and $D=0.27\text{m}$, $X_A=0.9$. since the volume of reactor increases, the length and diameter of the reactor too increases to achieved the production of ethylene oxide and proper sizing of the reactor.

c) *Space Time with Conversion*

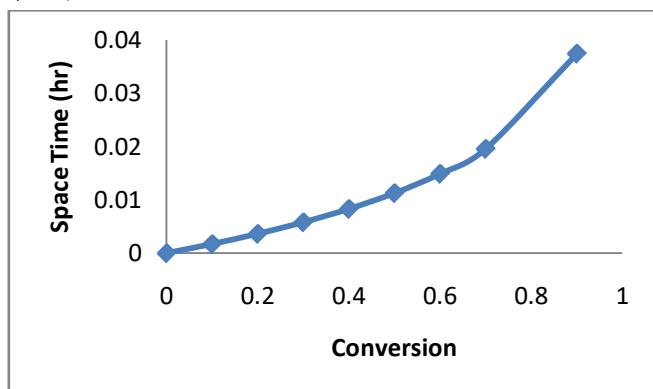


Figure 3: Profile of Space Time of the Reactor versus Conversion

Figure 3 depicts the variation of space time of reactor varying with conversion. The profile of the space time is exponentially increasing with conversion starting from $0.05-0.035\text{hr}$ when $X_A=0-0.9$ respectively. Space time is defined as the time taken for one reactor feed volume converted to product. From the results, the

space time values are very small meaning the reaction is a fast one. Increasing the space time values, leads to increase in the value of the reactor and higher yields of the product formed.

d) *Space Velocity with Conversion*

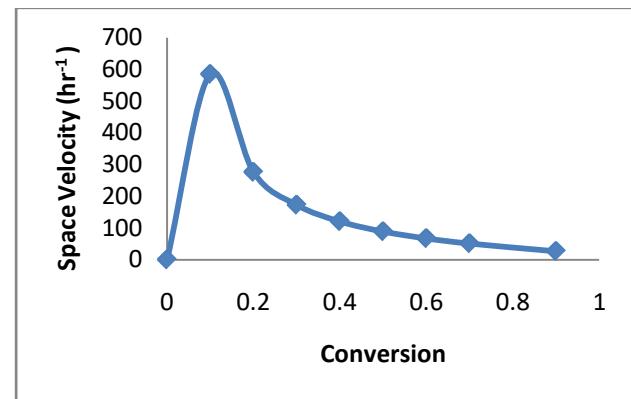


Figure 4: Graph of Space Velocity versus Conversion

Figure 4 shows the graph of space velocity varying with conversion. The universe of space time gives the space velocity's values. The space velocity's values are higher and increases from $0-600\text{hr}^{-1}$ when conversion increases too from $0-0.1$ and then drops exponentially from $600-10\text{hr}^{-1}$ when conversion increases from $0.1-0.9$. The space velocity should be reduced to achieve higher yield at lower cost as shown from the profile plot.

e) *Volume of Reactor with Conversion*

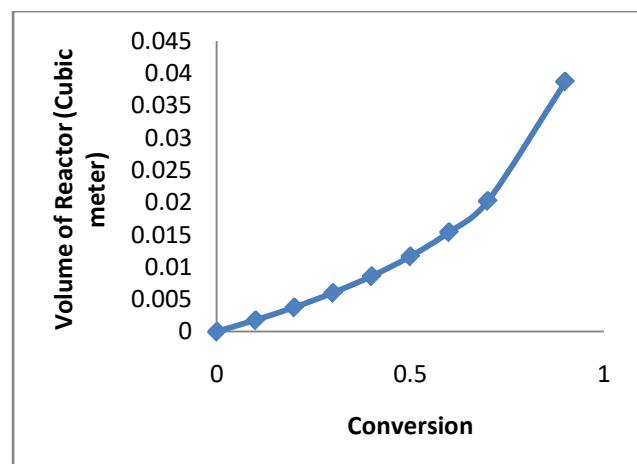


Figure 5: Variation of Volume of Plug Flow Reactor versus Conversion

Figure 5 depicts the variation of volume of plug flow reactor for formaldehyde production from methane and oxygen. The volume increases exponentially from 0m^3 to 0.038m^3 as conversion too increases from $0-0.9$. The increase in volume is achieved as a result of decrease in the rate values.

VI. CONCLUSION

The design of a 10,000 ton/yr Formaldehyde plant has been executed. The design considered first the material balance of the plant using the principles of conservation of mass which states that for steady state process the inflow of mass equals the outflow of mass, hence the mass balance of each unit/equipment was extensively evaluated, the principles of conservation of energy which states that outflow of energy equals inflow of energy for a steady state process was applied to evaluate the flow of energy for each stream. The design also considered other aspect such as equipment sizing/design specification, mechanical design, costing and economic evaluation, instrumentation and process control, layout, safety and environmental consideration and finally Hysys design simulation. Comparison of the material balance results between manual calculation and Aspen Hysys simulation and the highest difference was 0.8% for the energy balance result the difference between the manual calculation and Aspen Hysys simulation was 0.5% for the sizing results, the highest difference between the manual calculation and Aspen Hysys simulation was 0.3%.

Mechanical design to determine the thickness of vessels to withstand pressure was also considered as we as adding corrosion allowance. A detailed cost estimation and economic evaluation was analyzed to determine the profitability of the plant before setting up and it is given in the appendix.

REFERENCES RÉFÉRENCES REFERENCIAS

1. Andreasen, C., Van-Veen, O.H., & Martin M.(2002). Mechanistic Studies on the Oxidative Dehydrogenation of Methanol Over Polycrystalline Silver Using the Temporal-Analysis-of-Products Approach. *Journal of Catalysis*, 210, 53-66.
2. Antonio-Carlos, P.F., & Rubens M.F. (2010). Hybrid Training Approach for Artificial Neural Networks Using Genetic Algorithms for Rate of Reaction Estimation: Application to Industrial Methanol Oxidation to Formaldehyde on Silver Catalyst, *Chemical Engineering Journal*, 157, 501-508.
3. Geoffrey, I.N., Waterhouse, G.A. Bowmaker, K., & James B. M. (2004). Mechanism and active sites for the partial oxidation of methanol to formaldehyde over an electrolytes silver catalyst, *Applied catalysis A*, 265, 85-101.
4. Geoffrey, I.N., Waterhouse, G. A., Bowmaker, K., & James B. M. (2004). Influence of Catalyst Morphology on the performance of electrolytic silver catalysts for the partial oxidation of methanol to formaldehyde, *Applied catalysis B*, 266, 257-273.
5. Alfares, H. K., & Adnan, M.A. (2016, July 7). An Optimization Model for Investment in Ethylene Derivatives. Retrieved from <https://www.Researchgate.net>.
6. Alzein, Z., & Nath, R. (2018, January 4). Ethylene plant optimization: Automation and Control. Retrieved from <https://www.Researchgate.net>.
7. Cameroon, G., Le, L., Levine, J., & Nagulapalli, N. (2019, April 14). Process Design for the Production of Ethylene from Ethanol. Retrieved from <https://www.Researchgate.net>.
8. Chauvel, A., & Lefebvre, G. (2015). Petrochemical Process: Technical and Economic Characteristic. Paris: Editions Technip.
9. Choudhary, V., Mondal, K.C., & Mulla, S. A. (2017). Non-Catalytic Pyrolysis of Ethane to Ethylene in the presence of CO₂ with/without limited O₂. *Journal of Chemical Science*, 118 (3), 261-267.
10. Ghanta, M., Fahey, A., Subramaniam, D. B. (2017). Environmental Impacts of Ethylene Production from Diverse Feedstock and Energy Sources. *Applied Petrochemical Resources*, 4(1), 167-179.
11. Ghaza, E., C., & Mayourian, J. (2014). *Ethylene Production Plant Design: Process Evaluation and Design II*. U.S.A: Mc Graw Hill.
12. Gujarathi, A., M., Patle, D. S., Agarwal, P., Karemire, A. L. & Babu, B. V. (2020). Simulation and Analysis of Ethane. *Cracking Processes*, 45(1), 1-9.
13. Lauks, U. E., Vas Binder, R. J., Valkenburg, P. J & Van Leeuwen, C. (2015). *On-line Optimization of an Ethylene Plant*. Germany: OMV Deutschland GmbH.
14. Marton, S (2017) Renewable Ethylene: A Review of Options for Renewable steam cracker Feedstocks. (unpublished Master's Thesis), Chalmers University of Technology, Sweden: Gothenburg.
15. Mazanec, T. J., Yuschak, T & Long, R (2019). *Ethylene Production Via Ethane Oxidation in Microchannel Reactors*. (unpublished Master's Thesis), Velocity Inc. USA, Plain City, Ohio.
16. Meisong, Y. B. (2015). *Simulation and Optimization of an Ethylene Plant*. (unpublished Master's Thesis), University of California, California.
17. Mohamad A. F. (2016). *Practical Engineering guidelines for processing plants*. New Age International Publishers: New Delhi.
18. Mohsenzadeh, A., Zamani, A & Taherzadeh, M. J. (2019). Bio-Ethylene Production from Ethanol: A review and Techno-economical evaluation. *Chemical and Biological Engineering Reviews*, 4 (2), 1-18.
19. Jaja, Z., Akpa, J.G. and Dagde, K.K. (2020) Optimization of Crude Distillation Unit Case Study of the Port Harcourt Refining Company. *Advances in Chemical Engineering and Science*, 10, 123-134.

APPENDIX

Unit operation						
Name	Equipment Cost [USD]	Installed Cost [USD]	Equipment Weight [LBS]	Installed Weight [LBS]	Utility Cost [USD/HR]	
CSTR-100	43900	174300	3200	15911	0	
E-100	23500	121600	2700	11110	17.982	
K-10	835600	1034500	12900	40584	8.67225	
E-101	7700	48500	270	4478	0	
V-100	23800	83300	7000	23244	0	
CRV-100	0	0	0	0	0	
MIX-100	0	0	0	0	0	

Summary	
Name	Summary
Total Capital Cost [USD]	4890900
Total Operating Cost [USD/Year]	1917740
Total Raw Materials Cost [USD/Year]	0
Total Product Sales [USD/Year]	0
Total Utilities Cost [USD/Year]	261300
Desired Rate of Return [Percent/Year]	20
P.O.Period [Year]	0
Equipment Cost [USD]	934500
Total Installed Cost [USD]	1462200

Utilities					
Name	Fluid	Rate	Rate Units	Cost per Hour	Cost Units
Electricity		152.598	KW	11.826345	USD/H
Cooling Water	Water	0.14985	MMGAL/H	17.982	USD/H

