



GLOBAL JOURNAL OF COMPUTER SCIENCE AND TECHNOLOGY

Volume 11 Issue 9 Version 1.0 May 2011

Type: Double Blind Peer Reviewed International Research Journal

Publisher: Global Journals Inc. (USA)

ISSN: 0975-4172 & Print ISSN: 0975-4350

A Novel Approach for Reduction of Huffman Cost Table in Image Compression

By Singuru Srihari, Mohan Krishna Samantula, Gona Raja Kumar, T.V. Trinadh

GITAM University

Abstract Huffman codes are being widely used as a very efficient technique for compressing image. To achieve a high compressing ratio, the cost table need to be reduced. A new approach has been defined which reduces the cost table of the traditional Huffman Algorithm. This paper presents a minor modification to the Huffman coding of the binary Huffman compression algorithm. A study and implementation of the traditional Huffman algorithm is studied. In this paper a new methodology has been proposed for the reduction of the cost table for the image compression using Huffman coding Technique. Compared with the traditional Huffman coding the proposed method yields the best results in the generation of cost tables. The advantages of new binary Huffman table are that the space requirement and time required to transmit the image is reduced significantly.

GJCST Classification: I.4.2, E.4



Strictly as per the compliance and regulations of:



A Novel Approach for Reduction of Huffman Cost Table in Image Compression

Singuru Srihari^a, Mohan Krishna Samantula^Q, Gona Raja Kumar^B, T.V. Trinadh^W

Abstract- Huffman codes are being widely used as a very efficient technique for compressing image. To achieve a high compressing ratio, the cost table need to be reduced. A new approach has been defined which reduces the cost table of the traditional Huffman Algorithm. This paper presents a minor modification to the Huffman coding of the binary Huffman compression algorithm. A study and implementation of the traditional Huffman algorithm is studied. In this paper a new methodology has been proposed for the reduction of the cost table for the image compression using Huffman coding Technique. Compared with the traditional Huffman coding the proposed method yields the best results in the generation of cost tables. The advantages of new binary Huffman table are that the space requirement and time required to transmit the image is reduced significantly.

I. INTRODUCTION

In computer science and information theory, Image compression[1,2,3,9] is the process of encoding Image using less than an un-encoded representation would use, through use of specific encoding schemes. Huffman coding as a high efficient method is playing a larger role in image compression [1,2,3,9]. Therefore, how to save the algorithm's storage space and how to increase its compression ratio have always been concerned. The compressed image obtained by Huffman algorithm[4,6,7,9] consists of two parts, one is the compressed source file and the other is the file head (Huffman Table) used to decode or the mapping table between the symbols in the source file and the related codes in the compressed image. The nature of Huffman coding[2,4,8] algorithm decides the constancy of the source image's compression ratio, so the algorithm's compression ratio is directly related to the cost of Huffman table. This paper studies and implements the high compression ratio Huffman algorithm based on Huffman cost table. In the study, we manage to obtain

more reduced Huffman table using traditional Huffman tree.

May 2011

31

II. VARIOUS TECHNIQUES

Some of the Image Compression techniques are,

1. Binary Huffman Coding
2. Shannon Coding
3. Arithmetic Coding
4. Huffman Shift Coding

III. BINARY HUFFMAN ALGORITHM

The binary Huffman coding[2,4,8] is the process of dividing the image into matrix of colour codes representing various colours and then it will calculate the probabilities of occurrences of each pixel, put them into descending order and then will append the binary digits to each probability/pixel in a systematic way such that no two or more pixels should have same binary code. After obtaining these values we can make two types of files. One representing compressed file and other is Huffman cost table[1,2,3,4] used to decode or the mapping table between the symbols in the source file and the related codes in the compressed image.

Algorithm for constructing the Binary Huffman tree is,

Step1. Start

Step2. Convert image into matrix of colour codes.

Step3. Calculate probabilities for each colour code.

Step4. Select the two parentless nodes with the lowest probabilities.

Step5. Create a new node which is the parent of the two lowest probability nodes.

Step6. Assign the new node a probability equal to the sum of its children's probabilities.

Step7. Repeat Step 1 until there is only one parentless node left.

Step8. Stop

The flow chart for the above algorithm is,

About^a- Department of Information Technology, GITAM University, Visakhapatnam, India

E-mail: srihari.singuru@gmail.com

About^Q- Asst. Prof., Department of Information Technology, GITAM University, Visakhapatnam, India

E-mail: mohankrishnas@gmail.com

About^B- Department of Information Technology, GITAM University, Visakhapatnam, India

E-mail: rajkumar.gona11@gmail.com


About^W- Department of Information Technology, GITAM University, Visakhapatnam, India

E-mail: trinadh059@gmail.com

Volume XI Issue IX Version I

Global Journal of Computer Science and Technology



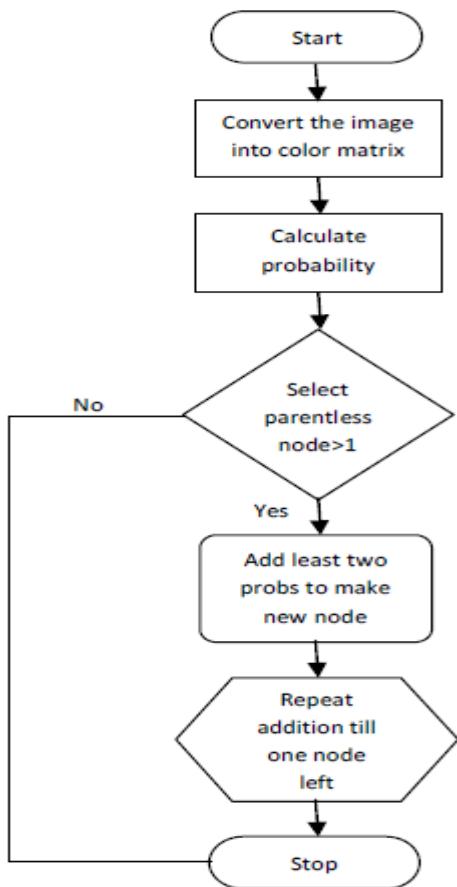

Once a Huffman tree[5,6,9] is built, Canonical Huffman codes, which require less information to rebuild, it will be generated by the following steps:

Step1. Start
Step2. Assign binary digits 0 and 1 to the last iteration probabilities.
Step3. For the previous iteration assign the same codes of parent node to its children nodes.
Step4. Then append binary digits 0 and 1 again to child nodes respectively.
Step5. If it is not a parent node then assign the same code as in the next iteration.

a) *According to traditional Binary Huffman algorithm*

| Pix | Prob | Ite-1 | | Ite-2 | | Ite-3 | | Ite-4 | | Ite-5 | | Ite-6 | | Ite-7 | | |
|-----|------|-------|-----|-------|-----|-------|-----|-------|-----|-------|-----|-------|-----|-------|-----|---|
| 9 | .30 | 00 | .30 | 00 | .30 | 00 | .30 | 00 | .30 | 00 | .30 | 00 | .40 | 1 | .60 | 0 |
| 7 | .17 | 010 | .17 | 010 | .17 | 010 | .18 | 11 | .22 | 10 | .30 | 01 | .30 | 00 | .40 | 1 |
| 4 | .13 | 011 | .13 | 011 | .13 | 011 | .17 | 010 | .18 | 11 | .22 | 10 | .30 | 01 | | |
| 8 | .12 | 100 | .12 | 100 | .12 | 100 | .13 | 011 | .17 | 010 | .18 | 11 | | | | |
| 6 | .10 | 101 | .10 | 101 | .10 | 101 | .12 | 100 | .13 | 011 | | | | | | |
| 3 | .09 | 110 | .09 | 110 | .09 | 110 | .10 | 101 | | | | | | | | |
| 1 | .05 | 1110 | .05 | 1110 | .09 | 111 | | | | | | | | | | |
| 5 | .03 | 11100 | .04 | 1110 | | | | | | | | | | | | |
| 2 | .01 | 11101 | | | | | | | | | | | | | | |

Step6. Repeat the process until all symbols or pixels are assigned codes.

Step7. Stop

Encoding Data

Once a Huffman code has been generated, data may be encoded simply by replacing each symbol with its code.

Decoding Data

If you know the Huffman code for some encoded data, decoding may be accomplished by reading the encoded data one bit at a time. Once the bits read match a code for symbol, write out the symbol and start collecting bits again.

IV. PROPOSED APPROACH FOR REDUCING THE COST TABLE

In our proposed system the binary Huffman coding is divided into two parts. First part is separate the highest two probabilities from the image and assign 0 and 1 to those probabilities and for second part do binary Huffman coding for remaining probabilities as it is. By doing this we can send the pixel with highest occurrences by single bit itself, otherwise if we do Normal binary Huffman coding we may occur more than one bit code for the highest probability pixel, so its waste of memory to send more bits for more times for higher probability pixel.

V. ASSUMPTION

The third probability of an image must be lesser than the sum of probabilities of the image from fifth probability.

VI. EXPERIMENTAL RESULTS

This software tutorial gives a comparative study on both the two algorithms Huffman and proposed. According to the experimental results obtained, it is observed that the efficiency of the proposed cost table is high and the space and time complexity is low.


| Pix | 9 | 7 | 4 | 8 | 6 | 3 | 1 | 5 | 2 |
|------|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Prob | .30 | .17 | .13 | .12 | .10 | .09 | .05 | .03 | .01 |
| Avg | .60 | .51 | .39 | .36 | .30 | .27 | .20 | .15 | .05 |

Efficiency

Avg. Number of bits per pixel to send: **2.83**

$$\text{Compression ratio is: } [(4-2.83)/4] * 100 \\ = 29.25\%$$

The number of iterations is: **7**

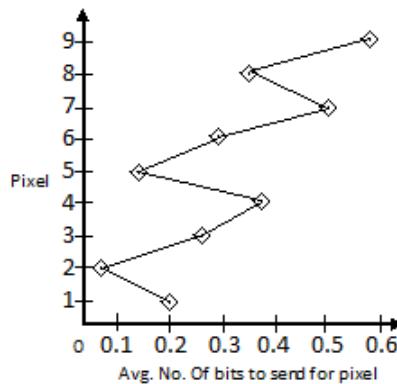

b) According to Proposed algorithm

| Pix | Prob | | Ite-1 | | Ite-2 | | Ite-3 | | Ite-4 | | Ite-5 | |
|-----|------|-------|-------|------|-------|-----|-------|----|-------|----|-------|---|
| 9 | .30 | 0 | | | | | | | | | | |
| 7 | .17 | 1 | | | | | | | | | | |
| 4 | .13 | 01 | .13 | 01 | .13 | 01 | .18 | 00 | .22 | 1 | .31 | 0 |
| 8 | .12 | 10 | .12 | 10 | .12 | 10 | .13 | 01 | .18 | 00 | .22 | 1 |
| 6 | .10 | 11 | .10 | 11 | .10 | 11 | .12 | 10 | .13 | 01 | | |
| 3 | .09 | 000 | .09 | 000 | .09 | 000 | .10 | 11 | | | | |
| 1 | .05 | 0010 | .05 | 0010 | .09 | 001 | | | | | | |
| 5 | .03 | 00110 | .04 | 0011 | | | | | | | | |
| 2 | .01 | 00111 | | | | | | | | | | |


| Pix | 9 | 7 | 4 | 8 | 6 | 3 | 1 | 5 | 2 |
|------|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Prob | .30 | .17 | .13 | .12 | .10 | .09 | .05 | .03 | .01 |
| Avg | .30 | .17 | .26 | .24 | .20 | .27 | .20 | .15 | .05 |

Efficiency

Avg. Number of bits per pixel to send: **1.84**

$$\begin{aligned} \text{Compression ratio is: } & [(4-1.84)/4]*100 \\ & = 54\% \end{aligned}$$

The number of iterations is: 5

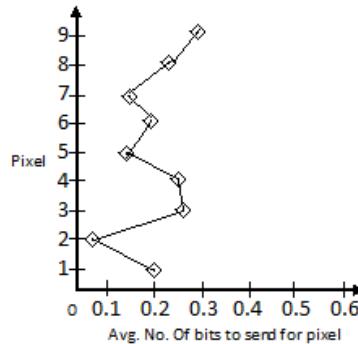

VII. CONCLUSION AND FUTURE SCOPE

With the advancements in compression technology, it is now very easy and efficient to compress the images. Various image compression techniques are available. The most common image compression standard is JPEG (Joint Picture Experts Group). Many advances are being made for improving the image quality. Applied fields that are making use of this technique in the coming future include astronomy, acoustics, nuclear engineering, sub-band coding, signal and image processing, neurophysiology, magnetic resonance imaging, speech discrimination, optics, fractals, turbulence, earthquake-prediction, radar, human vision, and pure mathematics applications such as solving partial differential equations.

REFERENCES RÉFÉRENCES REFERENCIAS

1. ARM Corp. Technical Reference Manual Revision: r3p2
2. ARM Corp. ARM Architecture Reference Manual, Advanced SIMD Extension and VFPv3 supplement
3. Optimization of Audio Codecs on NEON, www.iqmagazineonline.com/archive26/pdf/Pg36-39.pdf
4. Chirantan Kumar, Pranav Mishra, Prachi Choudhary, Kaustubh Joshi, Video Codec Optimizations on Cortex A8, "Proceedings of the 5th International Conference on Wireless communications, networking and mobile computing" Beijing, China, 4697-4700, 2009.
5. MPEG, Coding of moving pictures and associated audio for digital storage media at up to 1.5 Mbit/s, part 3: Audio. "International Standard IS 11172-3, ISO/IEC JTC1/SC29 WG11", 1992.
6. Vladimir Z Mesarovic, Raghunath Rao, Miroslav V Dokic, Sachin Deo, Selecting an Optimal Huffman Decoder for AAC, "Audio Engineering Society Convention 111" New York, USA, Nov. 2001.
7. Gutemberg G.S, Lima M.A.M, Filho W.O.G, Perkusich A, Morais M.R.A, Lima A.M.N, A Fast and Memory Efficient Huffman Decoding Method for the MPEG-4 AAC Standard, "ICCE 2008" Las Vegas, USA, Jan. 2008.
8. System reference manual of BeagleBoard, "<http://beagleboard.org/static/BBSRM/latest.pdf>".
9. ARM Corp. RealView Compilation Tools Compiler Reference Guide Version 4.0.